




INSPECTION STANDARD (HT LAB)

☐ Prototype ☐ Pre-Launch ☐ Production		Date (Original)		21/04/2022			
Part Name:- LAY SHAFT-L/R		Part No.:- 332/Y8857		Inspection Standard Number			
Customer :- JCB India		Change Level:-		SIP/4463/180			
Part Stage		Hard					
Sr.No.	Parameter	Special Char. Class	Methods			Reaction Plan	
			Product Specification	Inspection Method	Inspection Frequency		
1.	Surface Hardness	*	59~63 HRC	Rockwell Hardness Tester	1Pc/HT Batch	FMT-HT-39	A
2.	E.C.D (Cutoff 540HV) 1kg	*	1.0~1.25 mm	Micro Vicker / Vicker Hardness Tester	1Pc/HT Batch	FMT-HT-39	A
3.	Case Micro	*	Tempered Martensite+ RA<10%	Microscope	1Pc/HT Batch	FMT-HT-39	A
4.	Core Micro	*	LCTM+Bainitic Structure	Microscope	1Pc/HT Batch	FMT-HT-39	A
5.	Core Hardness	*	Not Specified in Customer Drg & Standard	Rockwell Hardness Tester	1Pc/HT Batch	FMT-HT-39	A

CONTROLLED COPY
 SR NO 01
 ISSUED TO HT Lab (V-7)
 DATE 11/8/22

SKETCH:-

Material Grade:- 20MnCr5

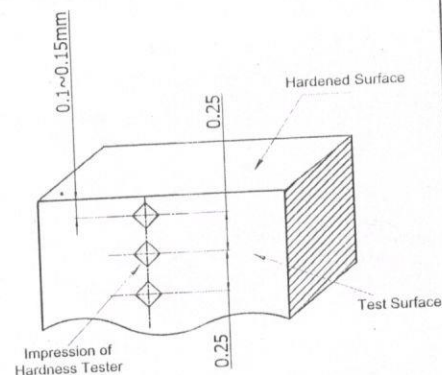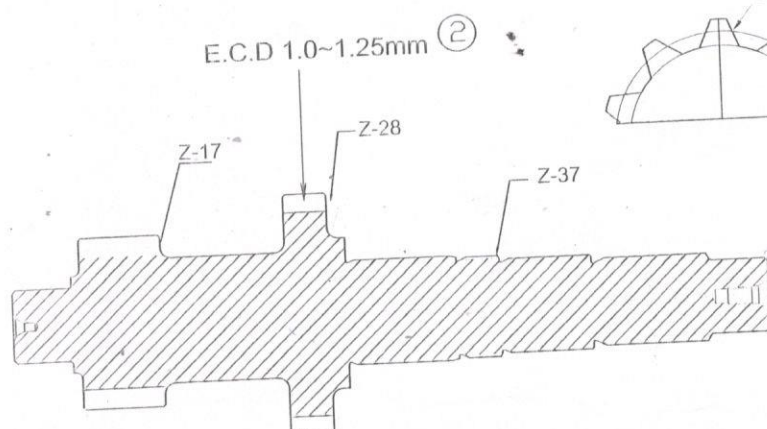

ECD Checking Pattern Details

Note:-For Other Detail see Std No:- 9995/0001

Reaction Plan: A-यदि Inspection करते समय कम्पोनेंट खराब मिले तो खराब कम्पोनेंट को Rejection का टैग लगाकर Rejection टेबल पर रखें और उसके बारे में Department के Incharge को बतायें।

Legends: ☐ Special Characteristics as Per Drawing ☒ * Special Characteristics For Process ☒ Special Characteristics For Safety

Change Details

Date	Rev. No.	Change	Reason for Change	Date	Rev. No.	Change	Reason for Change

Approved By: