
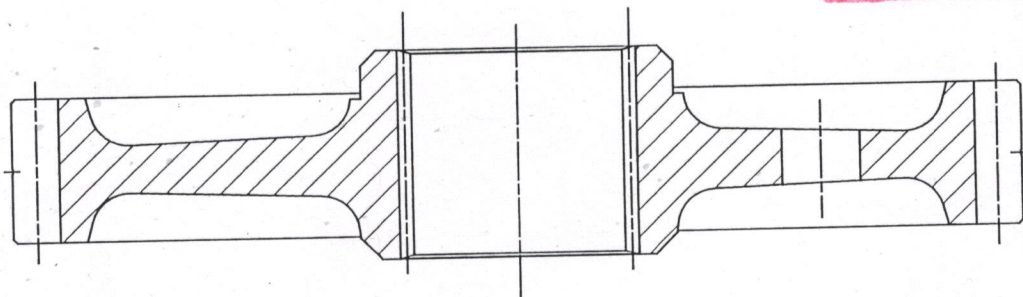




INSPECTION STANDARD (HT LAB)

☐ Prototype	☐ Pre-Launch	☒ Production	Date (Original)	25/02/14			
Part Name:- F.D Gear 241 High Speed		Part No.:-1017743		Inspection Standard Number		SIP/2015/130	
Customer :- TMTL		Change Level.:-00		Part Stage		HT Lab.	
Sr.No.	Parameter	Special Char. Class	Methods				Reaction Plan
			Product Specification	Inspection Method	Inspection Frequency	Control Method	
1.	Surface Hardness	*	58~62 HRC	Rockwell Hardness Tester	1Pc/Lot	FMT-HT-39	A
2.	ECD At 550 HV	*	0.7~1.0 mm	Vicker Hardness Tester	1Pc/Lot	FMT-HT-39	A
3.	Core Hardness at PCD	*	42 HRC Max.	Rockwell Hardness Tester	1Pc/Lot	FMT-HT-39	A
4.	Core Hardness at RCD	*	30 HRC Min.	Rockwell Hardness Tester	1Pc/Lot	FMT-HT-39	A
5.	Case Micro	*	Tempered Martensitec RA 15% Max.	Microscope	1Pc/Lot	FMT-HT-39	A
6.	Core Micro	*	LCTM + Bannite + free Ferrite <5%	Microscope	1Pc/Lot	FMT-HT-39	A

OPEN SKTCH

Material - 20MnCr5

Reaction Plan: A-यदि Inspection करते समय कम्पोनेंट खराब मिले तो खराब कम्पोनेंट को Rejection का टैग लगाकर Rejection टेबल पर रखें और उसके बारे में

Department के Incharge को बतायें ।

Legends:

► Special Characteristics as Per Drawing

* Special Characteristics For Process

△ Special Characteristics For Safety

Change Details

Date	Rev. No.	Change	Reason for Change	Date	Rev. No.	Change	Reason for Change