



INSPECTION STANDARD (HT LAB)


Page 01 of 01

☐ Prototype	☐ Pre-Launch	☒ Production	Date (Original)	24/12/2011
Part Name:- Gear Planet	Part No.:- 454/13001	Inspection Standard Number	SIP/4069/160	
Customer :- JCB (INDIA)	Change Level.:-00	Part Stage	HT Lab.	

Sr.No.	Parameter	Special Char. Class	Methods				Reaction Plan
			Product Specification	Inspection Method	Inspection Frequency	Control Method	
1.	Surface Hardness	*	59~63 HRC	Rockwell Hardness Tester	1Pc/Lot	FMT-HT-39	A
2.	Effective Case Depth On PCD(Cut off 540Hv)	*	0.75~1.0 mm	Vicker/MicroVicker Hardness Tester	1Pc/Lot	FMT-HT-39	A
3.	Effective Case Depth After Grinding On Dia As Shown in Figure	*	0.50 mm	Vicker/MicroVicker Hardness Tester	1Pc/Lot	FMT-HT-39	A
4.	Core Hardness At RCD	*	----	Rockwell Hardness Tester	1Pc/Lot	FMT-HT-39	A
5.	Micro Case	*	Tempered Martensite + RA<10%	Microscope	1Pc/Lot	FMT-HT-39	A
6.	Micro Core	*	LCTM +Bainite	Microscope	1Pc/Lot	FMT-HT-39	A

Sketch:

Material:- EN-352

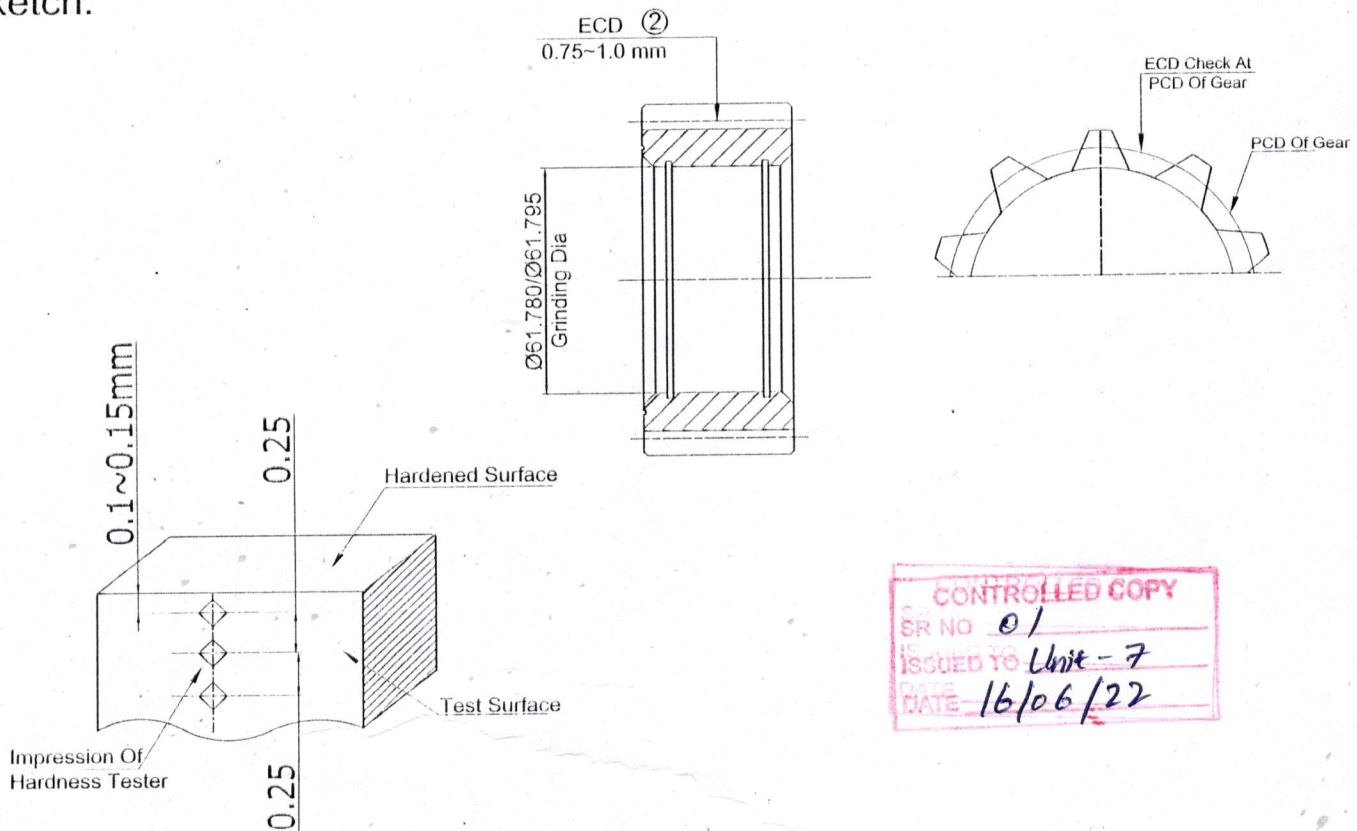

ECD-Checking Pattern Details

For more details refer JCB STD. - 9995/0001

Reaction Plan: A-यदि Inspektion करते समय कम्पोनेंट खराब मिले तो खराब कम्पोनेंट को Rejection का टैग लगाकर Rejection टेबल पर रखें और उसके बारे में

Department के Incharge को बतायें।

Legends: ☒ Special Characteristics as Per Drawing * Special Characteristics For Process ☒ Special Characteristics For Safety

Change Details

Date	Rev. No.	Change	Reason for Change	Date	Rev. No.	Change	Reason for Change