INSPECTION STANDARD (HT LAB)

☐ Prototype ☐ Pre-Launch ■ Production		Date (Original)	03/08/18
Part Name:- Fixed Sleeve - PTO Shaft	Part No.:- 1549C03401	Inspection Standard Number	SIP/4264/120
Customer :- TAFE	Change Level.:-00	Part Stage	HT Lab.

Sr.No.	Parameter	Special Char. Class	Methods				Reaction Plan
			Product Specification	Inspection Method	Inspection Frequency	Control Method	
1.	**Surface Hardness**	*	**58~62 HRC**	**Rockwell Hardness Tester**	1Pc/Lot	HT Lab Report	A
2.	**ECD Measured To HV550 (Z-26)**	*	**0.75~1.15 mm**	**Vicker Hardness Tester**	1Pc/Lot	HT Lab Report	A
3.	**Core Hardness**	*	**27~41 HRC**	**Rockwell Hardness Tester**	1Pc/Lot	HT Lab Report	A
4.	**Micro Case**	*	**Tempered Martensite+ RA<15%**	**Microscope**	1Pc/Lot	HT Lab Report	A
5.	**Core Micro**	*	**LCTM + Bainitic**	**Microscope**	1Pc/Lot	HT Lab Report	A

Space For Sketch:-

Material-20MnCr5

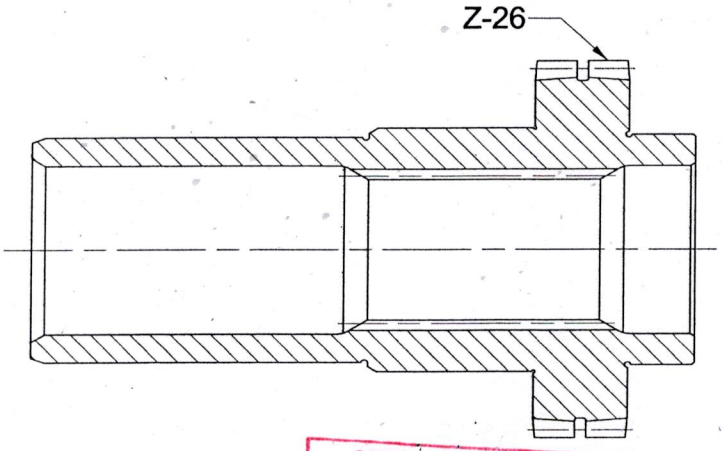

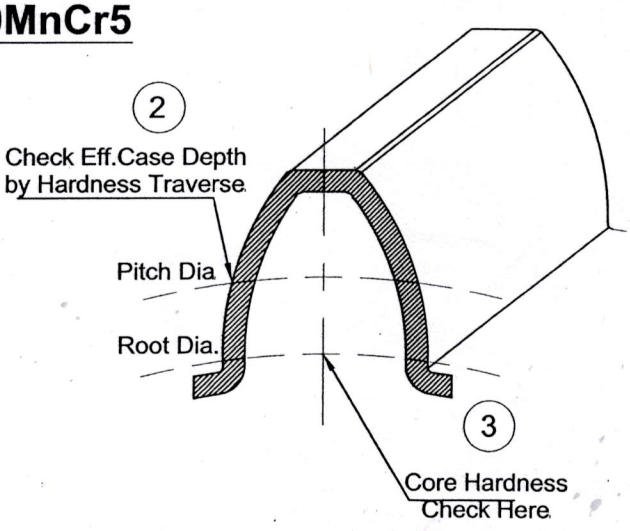

ECD & Core Checking Location

CONTROLLED COPY
SR NO. 01
ISSUED TO U-7
DATE 23/01/24

Reaction Plan: A-यदि Inspection करते समय कम्पोनेंट खराब मिले तो खराब कम्पोनेंट को Rejection का टेग लगाकर Rejection टेबल पर रखें और उसके बारे में Department के Incharge को बतायें ।

Legends: ► Special Characteristics as Per Drawing | * Special Characteristics For Process | ⚠ Special Characteristics For Safety

Change Details

Date	Rev. No.	Change	Reason for Change	Date	Rev. No.	Change	Reason for Change