


INSPECTION STANDARD (HT LAB)

☐ Prototype	☐ Pre-Launch	☒ Production	Date (Original)	03/02/21			
Part Name:- Gear-Transfer 39T (Increased Face Width)		Part No.:- 459/50540		Inspection Standard Number		SIP/4403/180	
Customer :- JCB India		Change Level.:-00		Part Stage		HT Lab	
Sr.No.	Parameter	Special Char. Class	Methods				Reaction Plan
			Product Specification	Inspection Method	Inspection Frequency	Control Method	
1.	Surface Hardness	*	59-63 HRC	Rockwell Hardness Tester	1Pc/Lot	HT Lab Report	A
2.	ECD Measure at 540 HV	*	1.0~1.25 mm	Micro Vicker / Vicker Hardness Tester	1Pc/Lot	HT Lab Report	A
3.	Micro Case	*	Tempered Martensite+ RA<10%	Microscope	1Pc/Lot	HT Lab Report	A
4.	Cove Micro	*	LCTM+ Baintic Structure	Microscope	1Pc/Lot	HT Lab Report	A
5.	Surface Hardness on Bore Diameter Ø51.94/51.97	*	No Greater Than 45 HRC	Rockwell Hardness Tester	1Pc/Lot	HT Lab Report	A
6.	Surface Hardness on Thread end to be softened Back so that the Max. Hardness over Length 33.0	*	40 HRC Max.	Rockwell Hardness Tester	1Pc/Lot	HT Lab Report	A

SKETCH:-

Material Grade:- 20MnCr5+B

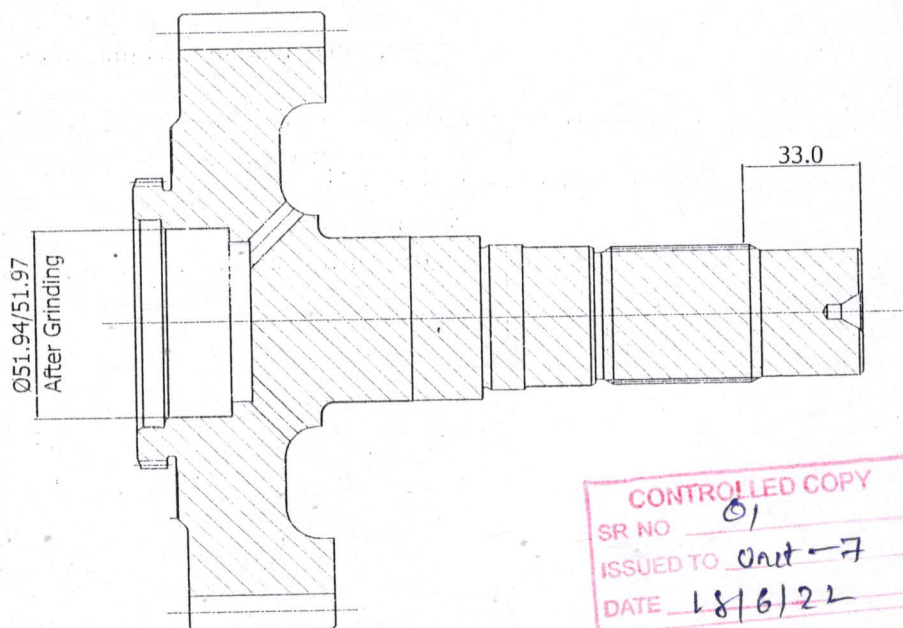

Note:- For Other Detail see Std No:- 9995/0001

Reaction Plan: A-यदि Inspection करते समय कम्पोनेंट खराब मिले तो खराब कम्पोनेंट को Rejection का टैग लगाकर Rejection टेबल पर रखें और उसके बारे में Department के Incharge को बतायें।

Legends: ☒ Special Characteristics as Per Drawing * Special Characteristics For Process ☒ Special Characteristics For Safety

Change Details

Date	Rev. No.	Change	Reason for Change	Date	Rev. No.	Change	Reason for Change

Checked By:

Approved By: