

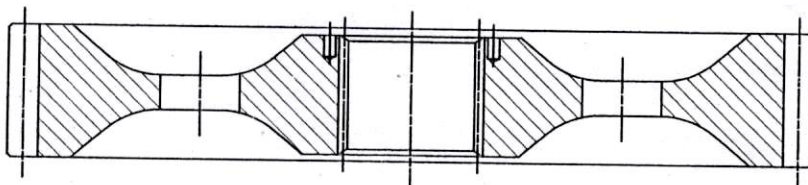


INSPECTION STANDARD (HT LAB)

Page 01 of 01

☐ Prototype	☒ Pre-Launch	☐ Production	Date (Original)	15/05/08			
Part Name:- BULL GEAR		Part No.:- 10009899BA		Inspection Standard Number		SIP/2047/	
Customer :-ITL		Change Level.:-00		Part Stage		HT Lab.	
Sr.No.	Parameter	Special Char. Class	Methods				Reaction Plan
			Product Specification	Inspection Method	Inspection Frequency	Control Method	
1.	Surface Hardness	*	60~64 HRC	Rockwell Hardness Tester	1Pc/Lot	HT Lab Report	A
2.	ECD Measured To 530HV AT 5 KG LOAD	*	1.15~1.35 mm	Vicker / Micro Vicker Hardness Tester	1Pc/Lot	HT Lab Report	A
3.	Core Hardness	*	35~45 HRC	Rockwell Hardness Tester	1Pc/Lot	HT Lab Report	A
4.	Micro Case	*	Tempered Martensite + RA<15%, No Carbide Network Required	Microscope	1Pc/Lot	HT Lab Report	A
5.	Core Micro	*	Bainitic Sorbite Free Ferrite Upto 10% Max.	Microscope	1Pc/Lot	HT Lab Report	A

OPEN SKTCH

Material- EN-355 (BS:970)

Reaction Plan: A-यदि Inspection करते समय कम्पोनेंट खराब मिले तो खराब कम्पोनेंट को Rejection का टैग लगाकर Rejection टेबल पर रखें और उसके बारे में Department के Incharge को बतायें।

Legends: ☒ Special Characteristics as Per Drawing * Special Characteristics For Process ☒ Special Characteristics For Safety

Change Details

Date	Rev. No.	Change	Reason for Change	Date	Rev. No.	Change	Reason for Change