
INSPECTION STANDARD (HT LAB)


☐ Prototype ☐ Pre-Launch ■ Production		Date (Original)	07/06/18
Part Name:- Sleeve-Pinion Shaft	Part No.:-1510C03401	Inspection Standard Number	SIP/4263/120
Customer :- TAFE	Change Level.:-00	Part Stage	HT Lab.

Sr.No.	Parameter	Special Char. Class	Methods				Reaction Plan
			Product Specification	Inspection Method	Inspection Frequency	Control Method	
1.	**Surface Hardness**	*	**58~62 HRC**	**Rockwell Hardness Tester**	1Pc/Lot	HT Lab Report	A
2.	**ECD Measured at 550 HV (Z-22)**	*	**0.75~1.15 mm**	**Vicker Hardness Tester**	1Pc/Lot	HT Lab Report	A
3.	**Core Hardness**	*	**28~41 HRC**	**Rockwell Hardness Tester**	1Pc/Lot	HT Lab Report	A
4.	**Micro Case**	*	**Tempered Martensitec+ RA<15%**	**Microscope**	1Pc/Lot	HT Lab Report	A
5.	**Core Micro**	*	**Bainitic Structure+ Sorbite Free Ferrite**	**Microscope**	1Pc/Lot	HT Lab Report	A

COMPONENT SKETCH:-

Material-20MnCr5

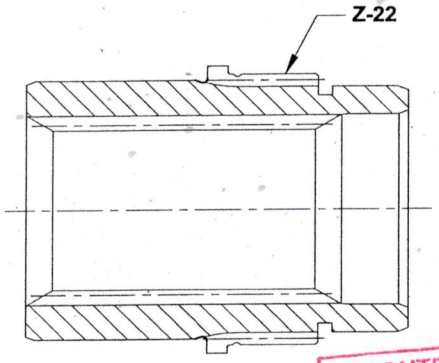

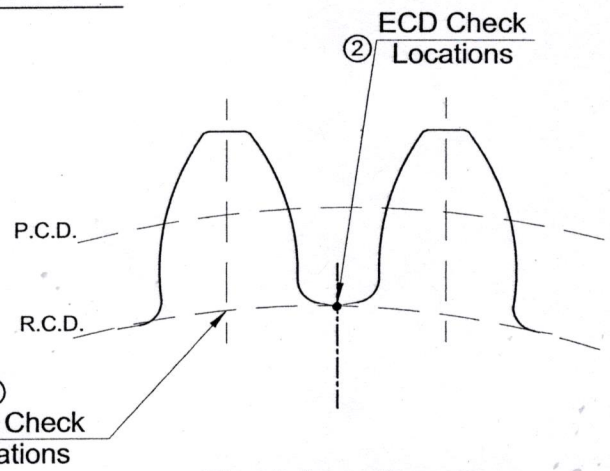

Check Locations For Spline Tooth

CONTROLLED COPY
SR NO. 01
ISSUED TO U-7
DATE 23/01/25

Reaction Plan: A-यदि Inspection करते समय कम्पोनेंट खराब मिले तो खराब कम्पोनेंट को Rejection का टेग लगाकर Rejection टेबल पर रखें और उसके बारे में Department के Incharge को बतायें ।

Legends: ► Special Characteristics as Per Drawing | * Special Characteristics For Process | ⚠ Special Characteristics For Safety

Change Details

Date	Rev. No.	Change	Reason for Change	Date	Rev. No.	Change	Reason for Change