


Tube 4

Index	Unit	Data
Operating Voltage	V / HZ	200-240 V AC, 50/60 Hz
Rated Current	mA	100
Power Consumption	W	20
Color Temperature CCT	K	3000/4000/5700
Luminous Flux	Lm	3000 @ 5700 K
Color Rendering Index	Ra	Over 80
Storage Humidity		20% ~ 70%
Storage Temperature	$^{\circ}$	-40°C ~ +50°C
Operating Temperature	$^{\circ}$	-20°C ~ +50°C
UGR		<19
THD		<15%
PF		0.9
Туре		Indoor
P		54
Life Expectancy	Years	50*
Dimming Function		TRIAC
Dimension	mm	14 X 19 X 1000
Weight	gm	92

Safety standard:

- i. Do Not attempt to disassemble, repair or perform any unauthorised modifications on the luminaire.
- ii. Do Not handle with wet hands, immerse in liquids or expose to water and rain, electric shock or fire may result.
- iii. Keep out of reach from children.
- iv. Do Not operate luminaire in preesnce of flammable gas or vapors.
- v. Do Not use product if it emits smoke or a strange odour; disconnect power source immediately to avoid personal injury and contact place of purchase.
- vi. Do Not intentionally stare or gaze at LED lumianire for prolonged periods while the luminaire is on.
- vii. Do Not use or leave luminaire in conditions of extreme heat, severe cold or high humidity.
- viii. Risk Of Fire or electric shock. Led retrofit installation must be done by a qualified electrician and all safety instructions must be followed to avoid a risk of injury and property damage. Do Not disassemble this product and replace any LED or other internal components. When the light source reaches its end of life the whole luminaire shall be replaced.
- ix. Remove any cracked protective shield

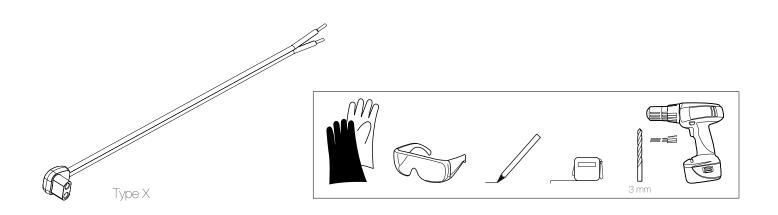

Product dimension

