

MPEG4AAC HE Decoder on C64x+

User's Guide



Literature Number: SPRUED8E
June 2010

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions

Products

Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DLP® Products	www.dlp.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
RF/IF and ZigBee® Solutions	www.ti.com/lprf
Wireless	www.ti.com/wireless-apps

Applications

Audio	www.ti.com/audio
Automotive	www.ti.com/automotive
Communications and Telecom	www.ti.com/communications
Computers and Peripherals	www.ti.com/computers
Consumer Electronics	www.ti.com/consumer-apps
Energy	www.ti.com/energy
Industrial	www.ti.com/industrial
Medical	www.ti.com/medical
Security	www.ti.com/security
Space, Avionics & Defense	www.ti.com/space-avionics-defense
Video and Imaging	www.ti.com/video

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2010, Texas Instruments Incorporated

Read This First

About This Manual

This document describes how to install and work with Texas Instruments' (TI) MPEG4AAC HE Decoder implementation on the C64x+ platform. It also provides a detailed Application Programming Interface (API) reference and information on the sample application that accompanies this component.

TI's codec implementations are based on the eXpressDSP Digital Media (XDM) standard. XDM is an extension of the eXpressDSP Algorithm Interface Standard (XDAIS).

Intended Audience

This document is intended for system engineers who want to integrate TI's codecs with other software to build a multimedia system based on the C64x+ platform.

This document assumes that you are fluent in the C language, have a good working knowledge of Digital Signal Processing (DSP), digital signal processors, and DSP applications. Good knowledge of eXpressDSP Algorithm Interface Standard (XDAIS) and eXpressDSP Digital Media (XDM) standard will be helpful.

How to Use This Manual

This document includes the following chapters:

- ❑ **Chapter 1 – Introduction**, provides a brief introduction to the XDAIS and XDM standards. It also provides an overview of the codec and lists its supported features.
- ❑ **Chapter 2 – Installation Overview**, describes how to install, build, and run the codec.
- ❑ **Chapter 3 – Sample Usage**, describes the sample usage of the codec.
- ❑ **Chapter 4 – API Reference**, describes the data structures and interface functions used in the codec.
- ❑ **Chapter 5 – Frequently Asked Questions**, provides answers to few frequently asked questions related to using this decoder.
- ❑ **Appendix A – Optimal Function Placement Order for Minimizing Instruction Cache Penalty**, describes the optimal function

placement order for minimizing cache penalty due to instruction cache misses.

- ❑ **Appendix B -- Revision History**, highlights the changes made to the SPRUED8D codec specific user guide to make it SPRUED8E.

Related Documentation From Texas Instruments

The following documents describe TI's DSP algorithm standards such as, XDAIS and XDM. To obtain a copy of any of these TI documents, visit the Texas Instruments website at www.ti.com.

- ❑ *TMS320 DSP Algorithm Standard Rules and Guidelines* (literature number SPRU352) defines a set of requirements for DSP algorithms that, if followed, allow system integrators to quickly assemble production-quality systems from one or more such algorithms.
- ❑ *TMS320 DSP Algorithm Standard API Reference* (literature number SPRU360) describes all the APIs that are defined by the TMS320 DSP Algorithm Interface Standard (also known as XDAIS) specification.
- ❑ *Technical Overview of eXpressDSP – Compliant Algorithms for DSP Software Producers* (literature number SPRA579) describes how to make algorithms compliant with the TMS320 DSP Algorithm Standard which is part of TI's eXpressDSP technology initiative.
- ❑ *Using the TMS320 DSP Algorithm Standard in a Static DSP System* (literature number SPRA577) describes how an eXpressDSP-compliant algorithm may be used effectively in a static system with limited memory.
- ❑ *DMA Guide for eXpressDSP-Compliant Algorithm Producers and Consumers* (literature number SPRA445) describes the DMA architecture specified by the TMS320 DSP Algorithm Standard (XDAIS). It also describes two sets of APIs used for accessing DMA resources: the IDMA2 abstract interface and the ACPY2 library.
- ❑ *eXpressDSP Digital Media (XDM) Standard API Reference* (literature number SPRUEC8)

The following documents describe TMS320 devices and related support tools:

- ❑ *Design and Implementation of an eXpressDSP-Compliant DMA Manager for C6X1X* (literature number SPRA789) describes a C6x1x-optimized (C6211, C6711) ACPY2 library implementation and DMA Resource Manager.
- ❑ *TMS320c64x+ Megamodule* (literature number SPRAA68) describes the enhancements made to the internal memory and describes the new features which have been added to support the internal memory architecture's performance and protection.
- ❑ *TMS320C64x+ DSP Megamodule Reference Guide* (literature number SPRU871) describes the C64x+ megamodule peripherals.

- ❑ *TMS320C64x to TMS320C64x+ CPU Migration Guide* (literature number SPRAA84) describes migration from the Texas Instruments TMS320C64x™ digital signal processor (DSP) to the TMS320C64x+™ DSP.
- ❑ *TMS320C6000 Optimizing Compiler v 6.0 Beta User's Guide* (literature number SPRU187N) explains how to use compiler tools such as compiler, assembly optimizer, standalone simulator, library-build utility, and C++ name demangler.
- ❑ *TMS320C64x/C64x+ DSP CPU and Instruction Set Reference Guide* (literature number SPRU732) describes the CPU architecture, pipeline, instruction set, and interrupts of the C64x and C64x+ DSPs.
- ❑ *TMS320DM6446 Digital Media System-on-Chip* (literature number SPRS283)
- ❑ *TMS320DM6446 Digital Media System-on-Chip Errata (Silicon Revision 1.0)* (literature number SPRZ241) describes the known exceptions to the functional specifications for the TMS320DM6446 Digital Media System-on-Chip (DMSoC).
- ❑ *TMS320DM6443 Digital Media System-on-Chip* (literature number SPRS282)
- ❑ *TMS320DM6443 Digital Media System-on-Chip Errata (Silicon Revision 1.0)* (literature number SPRZ240) describes the known exceptions to the functional specifications for the TMS320DM6443 Digital Media System-on-Chip (DMSoC).
- ❑ *TMS320DM644x DMSoC DSP Subsystem Reference Guide* (literature number SPRUE15) describes the digital signal processor (DSP) subsystem in the TMS320DM644x Digital Media System-on-Chip (DMSoC).
- ❑ *TMS320DM644x DMSoC ARM Subsystem Reference Guide* (literature number SPRUE14) describes the ARM subsystem in the TMS320DM644x Digital Media System on a Chip (DMSoC).

Related Documentation

You can use the following documents to supplement this user guide:

- ❑ *MPEG2 AAC standards document [ISO/IEC 13818-7 :2003]*
- ❑ *MPEG4 AAC standards document [ISO/IEC 14496-3 :1999(E)]*
- ❑ *MPEG4 AAC-HE standards document [ISO/IEC 14496-3:2001 / AMENDMENT 1, Bandwidth Extension]*

Abbreviations

The following abbreviations are used in this document:

Table 1-1. List of Abbreviations

Abbreviation	Description
--------------	-------------

Abbreviation	Description
AAC	Advanced Audio Coding
ADIF	Audio Data Interchange Format
ADTS	Audio Data Transport Stream
HE	High Efficiency
HQ	High Quality
LC	Low Complexity
LP	Low Power
PNS	Perceptual Noise Substitution
PCM	Pulse Code Modulation
RMS	Root Mean Square
SBR	Spectral Band Replication
XDAIS	eXpressDSP Algorithm Interface Standard
XDM	eXpressDSP Digital Media

Text Conventions

The following conventions are used in this document:

- ❑ Text inside back-quotes ("") represents pseudo-code.
- ❑ Program source code, function and macro names, parameters, and command line commands are shown in a `mono-spaced` font.

Product Support

When contacting TI for support on this codec, quote the product name (MPEG4AAC HE Decoder on C64x+) and version number. The version number of the codec is included in the Title of the Release Notes that accompanies this codec.

Trademarks

Code Composer Studio, the DAVINCI Logo, DAVINCI, DSP/BIOS, eXpressDSP, TMS320, TMS320C64x, TMS320C6000, TMS320DM644x, and TMS320C64x+ are trademarks of Texas Instruments.

All trademarks are the property of their respective owners.

Contents

Read This First	iii
About This Manual	iii
Intended Audience	iii
How to Use This Manual	iii
Related Documentation From Texas Instruments.....	iv
Related Documentation.....	v
Abbreviations	v
Text Conventions	vi
Product Support	vi
Trademarks	vi
Contents.....	vii
Figures	ix
Tables.....	xi
Introduction	1-1
1.1 Overview of XDAIS and XDM.....	1-2
1.1.1 XDAIS Overview	1-2
1.1.2 XDM Overview	1-2
1.2 Overview of MPEG4AAC HE Decoder.....	1-3
1.3 Supported Services and Features.....	1-4
Installation Overview	2-1
2.1 System Requirements	2-2
2.1.1 Hardware.....	2-2
2.1.2 Software	2-2
2.2 Installing the Component.....	2-2
2.3 Before Building the Sample Test Application	2-3
2.3.1 Installing DSP/BIOS	2-3
2.4 Building and Running the Sample Test Application	2-4
2.5 Configuration Files	2-5
2.5.1 Generic Configuration File	2-5
2.6 Standards Conformance and User-Defined Inputs	2-6
2.7 Uninstalling the Component	2-6
Sample Usage.....	3-1
3.1 Overview of the Test Application.....	3-2
3.1.1 Parameter Setup	3-3
3.1.2 Algorithm Instance Creation and Initialization.....	3-3
3.1.3 Process Call	3-4
3.1.4 Algorithm Instance Deletion	3-5
API Reference.....	4-1
4.1 Symbolic Constants and Enumerated Data Types.....	4-2
4.2 Data Structures	4-7
4.2.1 Common XDM Data Structures.....	4-7
4.2.2 MPEG4AAC HE Decoder Data Structures	4-14
4.3 Interface Functions.....	4-20
4.3.1 Creation APIs	4-20

4.3.2	Initialization API	4-23
4.3.3	Control API	4-24
4.3.4	Data Processing API	4-25
4.3.5	Termination API	4-27
Frequently Asked Questions		5-1
Optimal Function Placement Order for Minimizing Instruction Cache Penalty		A-1
Revision History		B-1

Figures

Figure 2-1. Component Directory Structure	2-2
Figure 3-1. Test Application Sample Implementation.....	3-2

This page is intentionally left blank

Tables

Table 1-1. List of Abbreviations..... v

Table 2-1. Component Directories..... 2-3

Table 4-1. List of Enumerated Data Types..... 4-2

Table 4-2. MPEG4AAC HE Decoder Error Status 4-5

Table 5-1. FAQs for MPEG4 AAC-HEv2 Decoder on C64X+..... 5-1

This page is intentionally left blank

Introduction

This chapter provides a brief introduction to XDAIS and XDM. It also provides an overview of TI's implementation of the MPEG4AAC HE Decoder on the C64x+ platform and its supported features.

Topic	Page
1.1 Overview of XDAIS and XDM	1-2
1.2 Overview of MPEG4AAC HE Decoder	1-3
1.3 Supported Services and Features	1-4

1.1 Overview of XDAIS and XDM

TI's multimedia codec implementations are based on the eXpressDSP Digital Media (XDM) standard. XDM is an extension of the eXpressDSP Algorithm Interface Standard (XDAIS).

1.1.1 XDAIS Overview

An eXpressDSP-compliant algorithm is a module that implements the abstract interface IALG. The IALG API takes the memory management function away from the algorithm and places it in the hosting framework. Thus, an interaction occurs between the algorithm and the framework. This interaction allows the client application to allocate memory for the algorithm and also share memory between algorithms. It also allows the memory to be moved around while an algorithm is operating in the system. In order to facilitate these functionalities, the IALG interface defines the following APIs:

- ❑ `algAlloc()`
- ❑ `algInit()`
- ❑ `algActivate()`
- ❑ `algDeactivate()`
- ❑ `algFree()`

The `algAlloc()` API allows the algorithm to communicate its memory requirements to the client application. The `algInit()` API allows the algorithm to initialize the memory allocated by the client application. The `algFree()` API allows the algorithm to communicate the memory to be freed when an instance is no longer required.

Once an algorithm instance object is created, it can be used to process data in real-time. The `algActivate()` API provides a notification to the algorithm instance that one or more algorithm processing methods is about to be run zero or more times in succession. After the processing methods have been run, the client application calls the `algDeactivate()` API prior to reusing any of the instance's scratch memory.

The IALG interface also defines three more optional APIs `algControl()`, `algNumAlloc()`, and `algMoved()`. For more details on these APIs, see *TMS320 DSP Algorithm Standard API Reference* (literature number SPRU360).

1.1.2 XDM Overview

In the multimedia application space, you have the choice of integrating any codec into your multimedia system. For example, if you are building a video decoder system, you can use any of the available video decoders (such as MPEG4, H.263, or H.264) in your system. To enable easy integration with the client application, it is important that all codecs with similar functionality use similar APIs. XDM was primarily defined as an extension to XDAIS to ensure uniformity across different classes of codecs

(For example audio, video, image, and speech). The XDM standard defines the following two APIs:


- ❑ `control()`
- ❑ `process()`

The `control()` API provides a standard way to control an algorithm instance and receive status information from the algorithm in real-time. The `control()` API replaces the `algControl()` API defined as part of the IALG interface. The `process()` API does the basic processing (encode/decode) of data.

Apart from defining standardized APIs for multimedia codecs, XDM also standardizes the generic parameters that the client application must pass to these APIs. The client application can define additional implementation specific parameters using extended data structures.

The following figure depicts the XDM interface to the client application.

As depicted in the figure, XDM is an extension to XDAIS and forms an

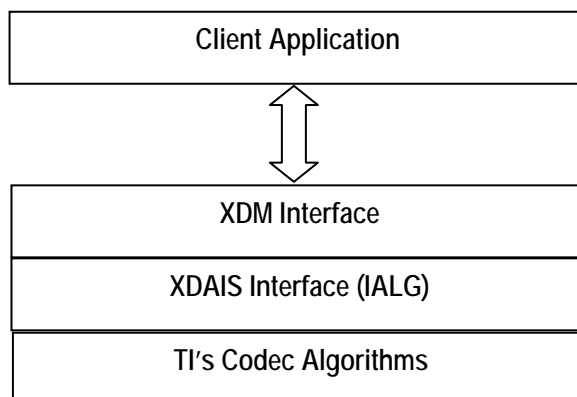

interface between the client application and the codec component. XDM insulates the client application from component-level changes. Since TI's multimedia algorithms are XDM-compliant, it provides you with the flexibility to use any TI algorithm without changing the client application code. For example, if you have developed a client application using an XDM-compliant MPEG4 video decoder, then you can easily replace MPEG4 with another XDM-compliant video decoder, say H.263, with minimal changes to the client application.

For more details, see eXpressDSP Digital Media (XDM) Standard API Reference (literature number SPRUEC8).

1.2 Overview of MPEG4AAC HE Decoder

Advanced Audio Coding (AAC) is an audio data compression format. This coding technique uses perceptual filter bank, which is a sophisticated masking model, noise-shaping techniques, and channel coupling. It adopts noiseless coding and bit-allocation to provide the maximum compression within the constraints of providing the highest possible quality at smaller bit-rates.

1.3 Supported Services and Features

This user guide accompanies TI's implementation of MPEG4AAC HE Decoder on the C64x+ platform.

This version of the codec has the following supported features:

- ❑ Supports MPEG4 AAC Low Complexity (LC) object type implementations
- ❑ Supports MPEG2 AAC Low Complexity (LC) object type implementations
- ❑ Supports MPEG4 AAC Long Term Prediction(LTP) object type implementations.
- ❑ Supports MPEG4 AAC High Efficiency (HE) object type implementations
- ❑ Supports mono and stereo output
- ❑ Supports RAW data input format
- ❑ Supports Audio Data Interchange Format (ADIF) ,and Audio Data Transport Stream (ADTS) input formats. These files are encoded with ISO/IEC 13818-7 or 14496-3 compliant encoders.
- ❑ Supports High Quality AAC HE decode as per ISO/IEC 14496-3:AMENDMENT 1
- ❑ Supports Parametric Stereo AAC-HEv2, as per ISO/IEC 14496-4:AMENDMENT 11
- ❑ Supports sampling frequency range of 8 kHz – 96 kHz as per ISO/IEC 14496-3 standard.
- ❑ Supports maximum bit-rate based on the sampling frequency as per standard.
- ❑ Supports bitrates ranging from 8kbps to 1152kbps.
- ❑ Supports both ARIB and ISO/IEC 13818-8 standard down mixing.
- ❑ eXpressDSP Digital Media (XDM 1.0 IAUDDEC1) compliant

Installation Overview

This chapter provides a brief description on the system requirements and instructions for installing the codec component. It also provides information on building and running the sample test application.

Topic	Page
2.1 System Requirements	2-2
2.2 Installing the Component	2-2
2.3 Before Building the Sample Test Application	2-3
2.4 Building and Running the Sample Test Application	2-4
2.5 Configuration Files	2-5
2.6 Standards Conformance and User-Defined Inputs	2-6
2.7 Uninstalling the Component	2-6

2.1 System Requirements

This section describes the hardware and software requirements for the normal functioning of the codec component.

2.1.1 Hardware

This codec has been built and tested on the DM644x EVM.

2.1.2 Software

The following are the software requirements for the normal functioning of the codec:

- ❑ **Development Environment:** This project is developed using Code Composer Studio version 3.2.37.12 for C6000 from Texas Instruments.
- ❑ **Code Generation Tools:** This project is compiled, assembled, archived, and linked using the code generation tools version 6.0.8.

2.2 Installing the Component

The codec component is released as a compressed archive. To install the codec, extract the contents of the zip file onto your local hard disk. The zip file extraction creates a top-level directory called 100_A_AAC_D_1_30_00, under which another directory named C64XPLUS_AAC_HE is created.

Figure 2-1 shows the sub-directories created in C64XPLUS_AAC_HE directory.

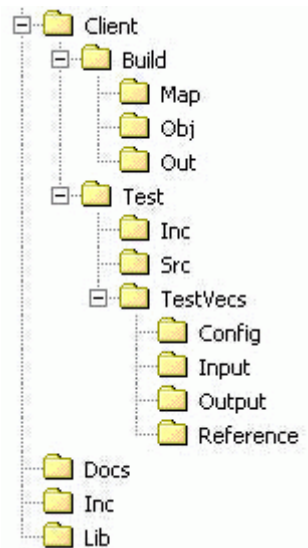


Figure 2-1. Component Directory Structure

Table 2-1 provides a description of the sub-directories created in the C64XPLUS_AAC_HE directory.

Table 2-1. Component Directories

Sub-Directory	Description
\Inc	Contains XDM related header files which allow interface to the codec library
\Lib	Contains the codec library file
\Docs	Contains user guide and datasheet
\Client\Build	Contains the sample test application project (.pj1) file
\Client\Build\Map	Contains the memory map generated on compilation of the code
\Client\Build\Obj	Contains the intermediate .asm and/or .obj file generated on compilation of the code
\Client\Build\Out	Contains the final application executable (.out) file generated by the sample test application
\Client\Test\Src	Contains application C files
\Client\Test\Inc	Contains header files needed for the application code
\Client\Test\TestVecs\Input	Contains input test vectors
\Client\Test\TestVecs\Output	Contains output generated by the codec
\Client\Test\TestVecs\Reference	Contains read-only reference output to be used for verifying checking against codec output
\Client\Test\TestVecs\Config	Contains configuration parameter files

2.3 Before Building the Sample Test Application

This codec is accompanied by a sample test application. To run the sample test application, you need DSP/BIOS. This version of the codec has been validated with DSP/BIOS version 5.31.

2.3.1 Installing DSP/BIOS

You can download DSP/BIOS from the TI external website:

https://www-a.ti.com/downloads/sds_support/targetcontent/bios/index.html

Install DSP/BIOS at the same location where you have installed Code Composer Studio. For example:

<install directory>\CCStudio_v3.2

The sample test application uses the following DSP/BIOS files:

- ❑ Header file, bcache.h available in the
<install directory>\CCStudio_v3.2<bios_directory>\packages
\ti\bios\include directory.

- ❑ Library file, biosDM420.a64P available in the
<install directory>\CCStudio_v3.2\<bios_directory>\packages
\ti\bios\lib directory.

2.4 Building and Running the Sample Test Application

This codec is accompanied by a sample test application. This application will run in TI's Code Composer Studio development environment. To build and run the sample application in Code Composer Studio, follow these steps:

- 1) Verify that you have installed TI's Code Composer Studio version 3.2.37.12 for C6000 and code generation tools version 6.0.8.
- 2) Verify that the codec object library aacdec_tii.l64P exists in the \Lib sub-directory.
- 3) Open the test application project file, TestAppDecoder.pjt in Code Composer Studio. This file is available in the \Client\Build sub-directory.
- 4) Select **Project > Build** to build the sample test application. This creates an executable file, TestAppDecoder.out in the \Client\Build\Out sub-directory.
- 5) Select **File > Load**, browse to the \Client\Build\Out sub-directory, select the codec executable created in step 4, and load it into Code Composer Studio in preparation for execution.
- 6) Select **Debug > Run** to execute the sample test application.

The sample test application takes the input files stored in the \Client\Test\TestVecs\Input sub-directory, runs the codec, and uses the reference files stored in the \Client\Test\TestVecs\Reference sub-directory to verify that the codec is functioning as expected.
- 7) On successful completion, the application displays one of the following messages for each frame:
 - "Decoder compliance test passed/failed" (for compliance check mode)
 - "Decoder output dump completed" (for output dump mode)

2.5 Configuration Files

This codec is shipped along with a generic configuration file (Testvecs.cfg) that specifies input and output/reference files for the sample test application.

2.5.1 Generic Configuration File

The sample test application shipped along with the codec uses the configuration file, Testvecs.cfg for determining the input and output/reference files for running the codec and checking for compliance. The Testvecs.cfg file is available in the \Client\Test\TestVecs\Config sub-directory.

The format of the Testvecs.cfg file is:

```
X
Input
Output/Reference
Y
```

where:

- ❑ X may be set as:
 - 1 - for compliance checking, no output file is created
 - 0 - for writing the output to the output file
- ❑ Input is the input file name (use complete path).
- ❑ Output/Reference is the output file name (if X is 0) or reference file name (if X is 1).
- ❑ Y may be set as
 - 1 - for stereo as desired channel mode
 - 0 - for mono as desired channel mode.

A sample Testvecs.cfg file is as shown:

```
1
..\..\Test\TestVecs\Input\davinci.aac
..\..\Test\TestVecs\Reference\davinci_ref.pcm
1

0
..\..\Test\TestVecs\Input\davinci.aac
..\..\Test\TestVecs\Output\davinci.pcm
1
```

2.6 Standards Conformance and User-Defined Inputs

To check the conformance of the codec for the default input file shipped along with the codec, follow the steps as described in Section 2.4.

To check the conformance of the codec for other input files of your choice, follow these steps:

- 1) Copy the input files to the \Client\Test\TestVecs\Inputs sub-directory.
- 2) Copy the reference files to the \Client\Test\TestVecs\Reference sub-directory.
- 3) Edit the configuration file, Testvecs.cfg available in the \Client\Test\TestVecs\Config sub-directory. For details on the format of the Testvecs.cfg file, see Section 2.5.1.
- 4) Execute the sample test application. On successful completion, the application displays one of the following message for each frame:
 - “Decoder compliance test passed/failed” (if x is 1)
 - “Decoder output dump completed” (if x is 0)

If you have chosen the option to write to an output file (x is 0), you can use any standard file comparison utility to compare the codec output with the reference output and check for conformance.

Note:

The comparison is valid only with a set of vectors provided as part of the release package.

2.7 Uninstalling the Component

To uninstall the component, delete the codec directory from your hard disk.

Sample Usage

This chapter provides a detailed description of the sample test application that accompanies this codec component.

3.1 Overview of the Test Application

The test application exercises the `IAUDDEC1` base class of the MPEG4AAC HE Decoder library. The main test application files are `TestAppDecoder.c` and `TestAppDecoder.h`. These files are available in the `\Client\Test\Src` and `\Client\Test\Inc` sub-directories respectively.

Figure 3-1 depicts the sequence of APIs exercised in the sample test application.

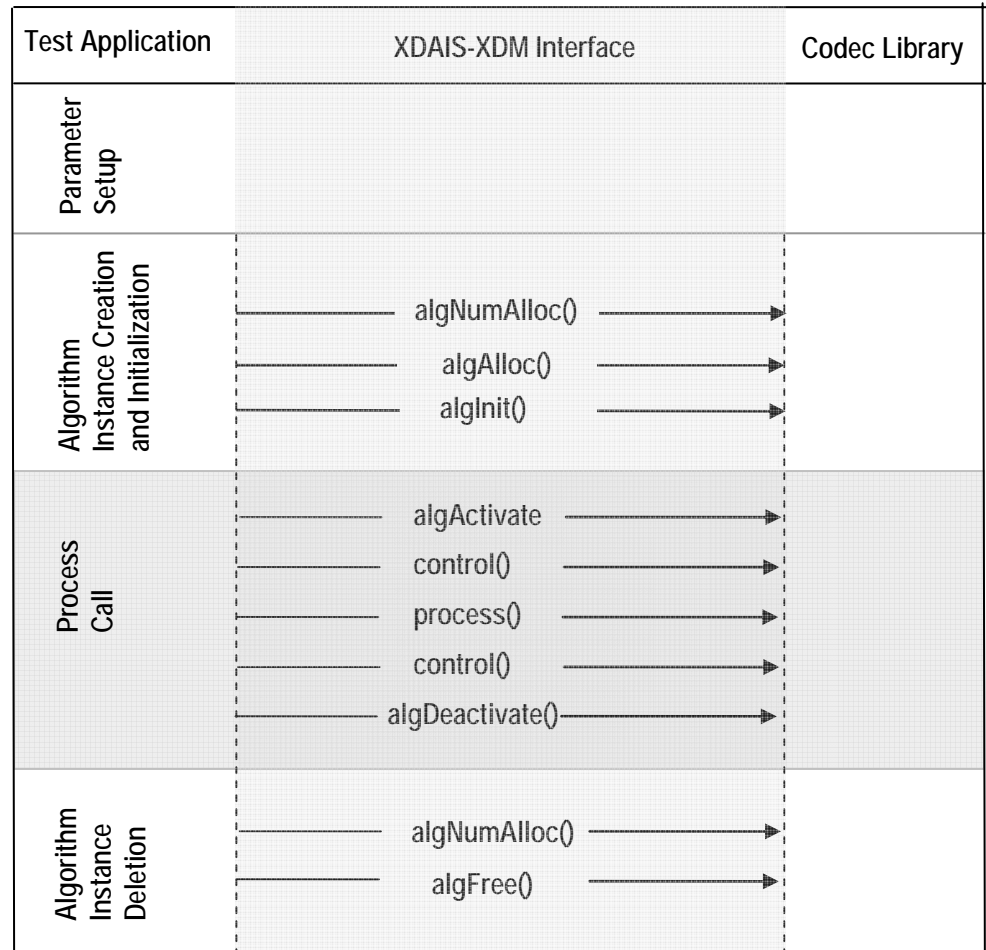


Figure 3-1. Test Application Sample Implementation

Note:

Audio codecs do not use `algActivate()` and `algDeactivate()` APIs.

The test application is divided into four logical blocks:

- ❑ Parameter setup
- ❑ Algorithm instance creation and initialization
- ❑ Process call
- ❑ Algorithm instance deletion

3.1.1 Parameter Setup

Each codec component requires various codec configuration parameters to be set at initialization. For example, a video codec requires parameters such as video height, video width, and so on. The test application obtains the required parameters from the Decoder configuration files.

In this logical block, the test application does the following:

- 1) Opens the generic configuration file, `Testvecs.cfg` and reads the input file name and output file name.

For more details on the configuration files, see Section 2.5.

- 2) Reads the input bit-stream into the application input buffer.

After successful completion of these steps, the test application does the algorithm instance creation and initialization.

3.1.2 Algorithm Instance Creation and Initialization

In this logical block, the test application accepts the various initialization parameters and returns an algorithm instance pointer. The following APIs are called in sequence:

- 1) `algNumAlloc()` - To query the algorithm about the number of memory records it requires.
- 2) `algAlloc()` - To query the algorithm about the memory requirement to be filled in the memory records.
- 3) `algInit()` - To initialize the algorithm with the memory structures provided by the application.

A sample implementation of the create function that calls `algNumAlloc()`, `algAlloc()`, and `algInit()` in sequence is provided in the `ALG_create()` function implemented in the `alg_create.c` file.

3.1.3 Process Call

After algorithm instance creation and initialization, the test application does the following:

- 1) Sets the dynamic parameters (if they change during run-time) by calling the `control()` function with the `XDM_SETPARAMS` command.
- 2) Sets the input and output buffer descriptors required for the `process()` function call. The input and output buffer descriptors are obtained by calling the `control()` function with the `XDM_GETBUFINFO` command.
- 3) Calls the `process()` function to encode/decode a single frame of data. The behavior of the algorithm can be controlled using various dynamic parameters (see Section 4.2.1.6). The inputs to the process function are input and output buffer descriptors, pointer to the `IAUDDEC1_InArgs` and `IAUDDEC1_OutArgs` structures.

There could be any ordering of `control()` and `process()` functions. The following APIs are called in sequence:

- 1) `control()` (optional) - To query the algorithm on status or setting of dynamic parameters and so on, using the six available control commands.
- 2) `process()` - To call the Decoder with appropriate input/output buffer and arguments information.
- 3) `control()` (optional) - To query the algorithm on status or setting of dynamic parameters and so on, using the six available control commands.

The do-while loop encapsulates frame level `process()` call and updates the input buffer pointer every time before the next call. The do-while loop breaks off either when an error condition occurs or when the input buffer exhausts. It also protects the `process()` call from file operations by placing appropriate calls for cache operations. The test application does a cache invalidate for the valid input buffers before `process()` and a cache write back invalidate for output buffers after `process()`.

In the sample test application, after calling `process()`, the output data is either dumped to a file or compared with a reference file.

3.1.4 Algorithm Instance Deletion

Once decoding/encoding is complete, the test application deletes the current algorithm instance. The following APIs are called in sequence:

- 1) `algNumAlloc()` - To query the algorithm about the number of memory records it used.
- 2) `algFree()` - To query the algorithm to get the memory record information.

A sample implementation of the delete function that calls `algNumAlloc()` and `algFree()` in sequence is provided in the `ALG_delete()` function implemented in the `alg_create.c` file.

This page is intentionally left blank

API Reference

This chapter provides a detailed description of the data structures and interfaces functions used in the codec component.

Topic	Page
4.1 Symbolic Constants and Enumerated Data Types	4-2
4.2 Data Structures	4-7
4.3 Interface Functions	4-20

4.1 Symbolic Constants and Enumerated Data Types

This section summarizes all the symbolic constants specified as either #define macros and/or enumerated C data types. For each symbolic constant, the semantics or interpretation of the same is also provided.

Table 4-1. List of Enumerated Data Types

Group or Enumeration Class	Symbolic Constant Name	Description or Evaluation
IAUDIO_ChannelMode	IAUDIO_1_0	Mono
	IAUDIO_2_0	Stereo
	IAUDIO_11_0	Dual Mono
	IAUDIO_3_0	Left, Right, Center. Not supported in this version of AAC Decoder.
	IAUDIO_2_1	Left, Right, Sur. Not supported in this version of AAC Decoder.
	IAUDIO_3_1	Left, Right, Center, Sur. Not supported in this version of AAC Decoder.
	IAUDIO_2_2	Left, Right, SurL, SurR. Not supported in this version of AAC Decoder.
	IAUDIO_3_2	Left, Right, Center, SurL, SurR. Not supported in this version of AAC Decoder.
	IAUDIO_2_3	Left, Right, SurL, SurR, surC. Not supported in this version of AAC Decoder.
	IAUDIO_3_3	Left, Right, Center, SurL, SurR, surC. Not supported in this version of AACDecoder.
IAUDIO_PcmFormat	IAUDIO_3_4	Left, Right, Center, SurL, SurR, sideL, sideR. Not supported in this version of AAC Decoder.
	IAUDIO_BLOCK	Left channel data followed by right channel data.
IAUDIO_DualMonoMode	IAUDIO_INTERLEAVED	Left and right channel data interleaved.
	IAUDIO_DUALMONO_LR	Play / Encode both left and right channel.
	IAUDIO_DUALMONO_LEFT	Play / Encode only left channel.

Group or Enumeration Class	Symbolic Constant Name	Description or Evaluation
IAUDIO_EncMode	IAUDIO_DUALMONO_RIGHT	Play / Encode only right channel.
	IAUDIO_DUALMONO_LR_MIX	Mix and play
	IAUDIO_CBR	Constant bit-rate
	IAUDIO_VBR	Variable bit-rate
XDM_DataFormat	XDM_BYTE	Big endian stream
	XDM_LE_16	16-bit little endian stream
	XDM_LE_32	32-bit little endian stream
	XDM_LE_64	64 bit little endian stream
	XDM_BE_16	16 bit big endian stream
	XDM_BE_32	32 bit big endian stream
	XDM_BE_64	64 bit big endian stream
XDM_CmdId	XDM_GETSTATUS	Query algorithm instance to fill <code>Status</code> structure
	XDM_SETPARAMS	Set run-time dynamic parameters through the <code>DynamicParams</code> structure
	XDM_RESET	Reset the algorithm
	XDM_SETDEFAULT	Initialize all fields in <code>DynamicParams</code> structure to default values specified in the library
	XDM_FLUSH	Handle end of stream conditions. This command forces algorithm instance to output data without additional input.
		Not applicable for MPEG4AAC HE Decoder. Just returns <code>IALG_EOK</code> .
	XDM_GETBUFINFO	Query algorithm instance regarding the properties of input and output buffers
	XDM_GETVERSION	Query the algorithm version. Not applicable to MPEG4AAC HE Decoder. Just returns <code>IALG_EOK</code> .
XDM_ErrorBit		The bit fields in the 32-bit error code are interpreted as shown.
	XDM_PARAMSCHANGE	Bit 8 <input type="checkbox"/> 1 - Sequence Parameters Change <input type="checkbox"/> 0 - Ignore Not applicable for MPEG4AAC HE Decoder.

Group or Enumeration Class	Symbolic Constant Name	Description or Evaluation
	XDM_APPLIEDCONCEALMENT	Bit 9 <input type="checkbox"/> 1 - Applied concealment <input type="checkbox"/> 0 - Ignore Not applicable for MPEG4AAC HE Decoder.
	XDM_INSUFFICIENTDATA	Bit 10 <input type="checkbox"/> 1 - Insufficient input data <input type="checkbox"/> 0 - Ignore
	XDM_CORRUPTEDDATA	Bit 11 <input type="checkbox"/> 1 - Invalid data <input type="checkbox"/> 0 - Ignore
	XDM_CORRUPTEDHEADER	Bit 12 <input type="checkbox"/> 1 - Corrupted frame header <input type="checkbox"/> 0 - Ignore
	XDM_UNSUPPORTEDINPUT	Bit 13 <input type="checkbox"/> 1 - Unsupported feature/parameter in input <input type="checkbox"/> 0 - Ignore
	XDM_UNSUPPORTEDPARAM	Bit 14 <input type="checkbox"/> 1 - Unsupported input parameter or configuration <input type="checkbox"/> 0 - Ignore Not applicable for MPEG4AAC HE Decoder.
	XDM_FATALERROR	Bit 15 <input type="checkbox"/> 1 - Fatal error (stop decoding) <input type="checkbox"/> 0 - Recoverable error

Note:

The remaining bits that are not mentioned in `XDM_ErrorBit` are interpreted as:

- ☐ Bit 16-32: Reserved
- ☐ Bit 0-7: Codec and implementation specific

The algorithm can set multiple bits to 1 depending on the error condition.

The MPEG4AAC HE Decoder specific error status messages are listed in Table 4-2. The Value column indicates the decimal value of the last 8-bits reserved for codec specific error statuses.

Table 4-2. MPEG4AAC HE Decoder Error Status

Symbolic Constant Name	Value	Description or Evaluation
AACDEC_TII_NO_ERROR	0	Successful decoding
AACDEC_TII_SYNC_NOT_FOUND	1	ADTS stream sync word not found
AACDEC_TII_NOT_ENOUGH_CH	2	Not enough channels supported (multichannel error for LC)
AACDEC_TII_PRED_DETECTED	3	Prediction detected, but not supported
AACDEC_TII_LFE_DETECTED	4	LFE channel detected, or more than one LFE detected but not supported
AACDEC_TII_GAIN_DETECTED	5	Gain control not implemented
AACDEC_TII_CCE_DETECTED	6	Coupling channel detected, but not supported
AACDEC_TII_PULSE_NOT_ALLOWED	7	Pulse is not supported for short window
AACDEC_TII_SFB_SHORT	8	Maximum scale factor band too large (Word16 window)
AACDEC_TII_HUFFMAN_ERROR	9	Error in Huffman decoding
AACDEC_TII_PROFILE_ERROR	10	Profile is not LC or LTP
AACDEC_TII_ELE_NOT_SUPPORTED	11	Element is different from SCE, CPE, LFE
AACDEC_TII_SAM_FREQ_NOT_SUPPORTED	12	Sampling frequency is not supported
AACDEC_TII_ADTS_FRAME_LEN_INCORRECT	13	ADTS frame length incorrect
AACDEC_TII_INSUFFICIENT_INPUT_DATA	14	Data in input buffer is insufficient to decode frame
AACDEC_TII_INVALID_SIZE	15	Invalid size of input structure.
AACDEC_TII_CH_ELE_COMBINATION_ERROR	16	Incorrect channel element combination
AACDEC_TII_INVALID_POINTER	17	Invalid pointer error
AACDEC_TII_CRC_MISMATCH_ERROR	18	Cyclic redundancy check error
AACDEC_TII_INSTANCE_TAG_MISMATCH	19	Instance tag mismatch error

Symbolic Constant Name	Value	Description or Evaluation
AACDEC_TII_INVALID_PARAMETERS	20	Generic code for invalid parameters
AACDEC_TII_INVALID_SBR_STREAM	21	Invalid SBR stream

Note:

The errors AACDEC_TII_ADTS_FRAME_LEN_INCORRECT, AACDEC_TII_INSTANCE_TAG_MISMATCH, AACDEC_TII_CRC_MISMATCH_ERROR, AACDEC_TII_CH_ELE_COMBINATION_ERROR, and AACDEC_TII_ADTS_FRAME_LEN_INCORRECT are just warning. Output will be valid when decoder returns these error.

4.2 Data Structures

This section describes the XDM defined data structures that are common across codec classes. These XDM data structures can be extended to define any implementation specific parameters for a codec component.

4.2.1 Common XDM Data Structures

This section includes the following common XDM data structures:

- ❑ XDM1_SingleBufDesc
- ❑ XDM1_BufDesc
- ❑ XDM_AlgBufInfo
- ❑ IAUDDEC1_Fxns
- ❑ IAUDDEC1_Params
- ❑ IAUDDEC1_DynamicParams
- ❑ IAUDDEC1_InArgs
- ❑ IAUDDEC1_Status
- ❑ IAUDDEC1_OutArgs

4.2.1.1 XDM1_SingleBufDesc

|| Description

This structure defines the single buffer descriptor for input and output buffers.

|| Fields

Field	Datatype	Input/ Output	Description
*buf	XDAS_Int8	Input	Pointer to a buffer address
bufSize	XDAS_Int32	Input	Size of each buffer in bytes
accessMask	XDAS_Int32	Output	Mask filled by the algorithm

4.2.1.2 XDM1_BufDesc

|| Description

This structure defines the buffer descriptor for input and output buffers.

|| Fields

Field	Datatype	Input/ Output	Description
numBufs	XDAS_Int32	Input	Number of buffers
descs[XDM_MAX_IO_BUFFERS]	XDM1_SingleBufDesc	Input	Buffer descriptors

4.2.1.3 XDM_AlgBufInfo

|| Description

This structure defines the buffer information descriptor for input and output buffers. This structure is filled when you invoke the `control()` function with the `XDM_GETBUFINFO` command.

|| Fields

Field	Datatype	Input/ Output	Description
minNumInBufs	XDAS_Int32	Output	Number of input buffers
minNumOutBufs	XDAS_Int32	Output	Number of output buffers
minInBufSize[XDM_MAX_IO_BUFFERS]	XDAS_Int32	Output	Size in bytes required for each input buffer

<code>minOutBufSize[XDM_MAX_IO_BUFFERS]</code>	<code>XDAS_Int32</code>	Output	Size in bytes required for each output buffer
--	-------------------------	--------	---

Note:

For MPEG4AAC HE Decoder, the buffer details are:

- ❑ Number of input buffer required is 1.
- ❑ Number of output buffer required is 1.
- ❑ The input buffer size (in bytes) is 3840 bytes.
- ❑ The output buffer size (in bytes) is 8192 bytes for 16 bit audio sample size, two channel output (stereo).

4.2.1.4 IAUDDEC1_Fxns**|| Description**

This structure contains pointers to all the XDAIS and XDM interface functions.

|| Fields

Field	Datatype	Input/ Output	Description
<code>ialg</code>	<code>IALG_Fxns</code>	Input	Structure containing pointers to all the XDAIS interface functions. For more details, see <i>TMS320 DSP Algorithm Standard API Reference</i> (literature number SPRU360).
<code>*process</code>	<code>XDAS_Int32</code>	Input	Pointer to the <code>process()</code> function
<code>*control</code>	<code>XDAS_Int32</code>	Input	Pointer to the <code>control()</code> function

4.2.1.5 IAUDDEC1_Params

|| Description

This structure defines the creation parameters for an algorithm instance object. Set this data structure to `NULL`, if you are not sure of the values to specify for these parameters.

|| Fields

Field	Datatype	Input/ Output	Description
size	<code>XDAS_Int32</code>	Input	Size of the basic or extended (if being used) data structure in bytes.
outputPCMWidth	<code>XDAS_Int32</code>	Input	Number of bits per output PCM Sample (16 bits/sample or 24 bits/sample). Default is 16 bits/sample.
pcmFormat	<code>XDAS_Int32</code>	Input	Output PCM Format Block/Interleaved. Default is interleaved.
dataEndianness	<code>XDAS_Int32</code>	Input	Endianness of output PCM data. See <code>XDM_DataFormat</code> enumeration for details. Default is <code>XDM_LE_16</code>

Note:

- ❑ This version of MPEG4AAC-HE Decoder supports `XDM_LE_16` format for output PCM data. Decoder also accepts `XDM_BYTE` `dataEndianness` for compatibility with previous releases.
- ❑ AAC-HE decoder only supports an output of 16 bits/sample.

4.2.1.6 IAUDDEC1_DynamicParams

|| IDescription

This structure defines the run-time parameters for an algorithm instance object. Set this data structure to `NULL`, if you are not sure of the values to be specified for these parameters.

|| Fields

Field	Datatype	Input/ Output	Description
size	<code>XDAS_Int32</code>	Input	Size of the basic or extended (if being used) data structure in bytes.
downSampleSbrFlag	<code>XDAS_Int32</code>	Input	Flag to indicate down sampling for SBR. This Flag is turned off by default.

4.2.1.7 IAUDDEC1_InArgs

|| Description

This structure defines the run-time input arguments for an algorithm instance object.

|| Fields

Field	Datatype	Input/ Output	Description
size	XDAS_Int32	Input	Size of the basic or extended (if being used) data structure in bytes.
numBytes	XDAS_Int32	Input	Number of valid input data (in bytes) in input buffer. For example, if number of valid input data in input buffer is 128 bytes, set this field to 128.
desiredChannelMode	XDAS_Int32	Input	Desired Channel Configuration. Refer IAUDIO_ChannelMode
lfeFlag	XDAS_Int32	Input	Flag indicating whether LFE channel data is desired in the output.

Note:

- ❑ MPEG4AAC-HE decoder can decode upto 6 channels. But decoder will downmix from multichannel output PCM down to stereo. So desiredChannelMode can be either IAUDIO_1_0, or IAUDIO_2_0 or IAUDIO_11_0
- ❑ For a mono stream if the desired channel mode is stereo or dual mono, decoder does 3dB attenuation on PCM output.

4.2.1.8 IAUDDEC1_Status

|| Description

This structure defines parameters that describe the status of the algorithm instance object.

|| Fields

Field	Datatype	Input/ Output	Description
size	XDAS_Int32	Input	Size of the basic or extended (if being used) data structure in bytes.
extendedError	XDAS_Int32	Output	Extended error enumeration for XDM compliant encoders and decoders. See XDM_ErrorBit enumeration for details.

Field	Datatype	Input/ Output	Description
data	XDM1_SingleBuf Desc	Output	Buffer descriptor for data passing
validFlag	XDAS_Int32	Output	Flag indicating the validity of the status structure
lfeFlag	XDAS_Int32	Output	Flag indicating whether LFE channel data is present or not in the input.
bitRate	XDAS_Int32	Output	Bit-rate in bits per second. For example, if the value of this field is 128000, it indicates that bit-rate is 128 kbps.
sampleRate	XDAS_Int32	Output	Sampling frequency in Hertz (Hz). For example, if the value of this field is 44100, it indicates that the sample rate is 44.1kHz.
channelMode	XDAS_Int32	Output	Output Channel Mode. See <code>IAUDIO_ChannelMode</code> for details.
pcmFormat	XDAS_Int32	Output	Output PCM Format Block/Interleaved.
numSamples	XDAS_Int32	Output	Number of samples in the output
outputBitsPerSample	XDAS_Int32	Output	Number of output bits per output sample. For example, if the value of the field is 16, it indicates 16 output bits per PCM sample.
bufInfo	XDM_AlgbufInfo	Output	Input and output buffer information. See <code>XDM_AlgbufInfo</code> data structure for details.
dualMonoMode	XDAS_Int32	Output	Mode to indicate type of Dual Mono. Only used in case of Dual Mono Output

Note:

- ❑ MPEG4 AAC-HE decoder supports only `IAUDIO_DUALMONO_LR` type of dual mono mode.
- ❑ Current implementation of AAC-HE Decoder does not update data field.
- ❑ MPEG4 AAC-HE decoder supports mono, stereo and dual mono channel modes. If the number of channels is more than two, downmixing to stereo will be carried out.

4.2.1.9 *IAUDDEC1_OutArgs*

|| Description

This structure defines the run-time output arguments for the algorithm instance object.

|| Fields

Field	Datatype	Input/ Output	Description
size	XDAS_Int32	Input	Size of the basic or extended (if being used) data structure in bytes.
extendedError	XDAS_Int32	Output	Extended error enumeration for XDM compliant encoders and decoders. See <code>XDM_ErrorBit</code> data structure for details.
bytesConsumed	XDAS_Int32	Output	Bytes consumed during the process call
numSamples	XDAS_Int32	Output	Number of output samples per channel
channelMode	XDAS_Int32	Output	Output Channel Configuration
lfeFlag	XDAS_Int32	Output	Flag indicating the presence of LFE channel in the output
dualMonoMode	XDAS_Int32	Output	Mode to indicate type of Dual Mono. Only used in case of Dual Mono output
sampleRate	XDAS_Int32	Output	Sampling frequency, in Hz

Note:

MPEG4-AAC-HE decoder supports only `IAUDIO_DUALMONO_LR` type of dual mono mode.

4.2.2 MPEG4AAC HE Decoder Data Structures

This section includes the following MPEG4AAC HE Decoder specific extended data structures:

- ❑ `IAACDEC_Params`
- ❑ `IAACDEC_DynamicParams`
- ❑ `IAACDEC_InArgs`
- ❑ `IAACDEC_Status`
- ❑ `IAACDEC_OutArgs`

4.2.2.1 IAACDEC_Params

|| Description

This structure defines the creation parameters and any other implementation specific parameters for the MPEG4AAC HE Decoder instance object. The creation parameters are defined in the XDM data structure, `IAUDDEC1_Params`.

|| Fields

Field	Datatype	Input/ Output	Description
<code>auddec_params</code>	<code>IAUDDEC1_Params</code>	Input	See <code>IAUDDEC1_Params</code> data structure for details.
<code>sixChannelMode</code>	<code>XDAS_Int32</code>	Input	Multi-channel mode: <input type="checkbox"/> 0 - off <input type="checkbox"/> 1 - on

Note:

The default value of `sixChannelMode` for MPEG4 AAC-HE decoder is 1. With `sixChannelMode` set to 1, decoder can decode upto 6 channel input streams.

4.2.2.2 IAACDEC_DynamicParams

|| Description

This structure defines the run-time parameters and any other implementation specific parameters for the MPEG4AAC HE Decoder instance object. The run-time parameters are defined in the XDM data structure, `IAUDDEC1_DynamicParams`.

|| Fields

Field	Datatype	Input/ Output	Description
<code>auddec_dynamicparams</code>	<code>IAUDDEC1_DynamicParams</code>	Input	See <code>IAUDDEC1_DynamicParams</code> data structure for details.
<code>enablePS</code>	<code>XDAS_Int32</code>	Input	Parametric stereo (PS) flag: <input type="checkbox"/> 0 - Disables PS <input type="checkbox"/> 1 - Enables PS

Field	Datatype	Input/ Output	Description
ulSamplingRateIdx	XDAS_Int32	Input	Sampling rate required for raw input data format: <input type="checkbox"/> 0 - 96.000 khz <input type="checkbox"/> 1 - 88.200 khz <input type="checkbox"/> 2 - 64.000 khz <input type="checkbox"/> 3 - 48.000 khz <input type="checkbox"/> 4 - 44.100 khz <input type="checkbox"/> 5 - 32.000 khz <input type="checkbox"/> 6 - 24.000 khz <input type="checkbox"/> 7 - 22.050 khz <input type="checkbox"/> 8 - 16.000 khz <input type="checkbox"/> 9 - 12.000 khz <input type="checkbox"/> 10 - 11.025 khz <input type="checkbox"/> 11 - 8.000 khz
nProfile	XDAS_Int32	Input	Decoder profile required for raw input data format: <input type="checkbox"/> 0 - MAIN <input type="checkbox"/> 1 - LC <input type="checkbox"/> 2 - SSR <input type="checkbox"/> 3 - LTP
bRawFormat	XDAS_Int32	Input	Raw input format indicator flag: <input type="checkbox"/> 0 - Indicates input format is not raw (that is, ADIF or ADTS formats) <input type="checkbox"/> 1 - Indicates input format is raw
pseudoSurroundEnableFlag	XDAS_Int32	Input	Pseudo surround enable flag to use Set2 type of down mixing. <input type="checkbox"/> 0 - Disables Pseudo surround enable flag <input type="checkbox"/> 1 - Enables Pseudo surround enable flag Ignored if EnableARIBDownmix is off.
enableARIBDownmix	XDAS_Int32	Input	ARIB down mix enable for 3/1, 3/2 and 3/2+LFE channel streams. <input type="checkbox"/> 0 - ARIB downmix off <input type="checkbox"/> 1 - ARIB downmix on

Note:

- ❑ For decoding ADIF and ADTS streams, set the field `bRawFormat` to 0 and ignore the `ulSamplingRateIdx` and `nProfile` fields.
- ❑ For decoding raw streams, set the field `bRawFormat` to 1 and the fields `ulSamplingRateIdx` and `nProfile` to one of the values given above.
- ❑ `pseudoSurroundEnableFlag` should select between Set1 and Set2 formulas when `pseudo_surround_enable` field in bit-stream is 1.
 - 0 – Set1 is used if `pseudo_surround_enable` is 1.
 - 1 – Set2 is used if `pseudo_surround_enable` is 1.
- ❑ This version of MPEG4-HE decoder supports only LC and LTP profiles and does not support MAIN and SSR profiles. So `nProfile` can be set to values 1 or 3
- ❑ `enableARIBDownmix` is to select between ARIB downmix and ISO/IEC 13818-8 standard downmix.
- ❑ For mono streams, if `enablePS` is 1, `monoToStereo` conversion happens.
- ❑ ARIB downmixing is done only if the channel configuration is 3/1 or 3/2 or 3/2+LFE, otherwise ISO/IEC 13818-8 standard downmixing is done.

4.2.2.3 IAACDEC_InArgs**|| Description**

This structure defines the run-time input arguments for the MPEG4AAC HE Decoder instance object.

|| Fields

Field	Datatype	Input/Output	Description
<code>auddec_inArgs</code>	<code>IAUDEDEC1_InArgs</code>	Input	See <code>IAUDEDEC1_InArgs</code> data structure for details.

4.2.2.4 IAACDEC_Status

|| Description

This structure defines parameters that describe the status of the MPEG4AAC HE Decoder and any other implementation specific parameters. The status parameters are defined in the XDM data structure, IAUDDEC1_Status.

|| Fields

Field	Datatype	Input/ Output	Description
auddec_status	IAUDDEC1_Status	Output	See IAUDDEC1_Status data structure for details.
mpegID	XDAS_Int16	Output	Indicates the version of MPEG : <input type="checkbox"/> 0 – Indicates MPEG4 <input type="checkbox"/> 1 – Indicates MPEG2
original_copy	XDAS_Int16	Output	Indicates if the stream is original or copy <input type="checkbox"/> 0 – Copy <input type="checkbox"/> 1 – Original
copyright	XDAS_Int16	Output	Indicates if the stream is copyright protected or not <input type="checkbox"/> 0 – not copyright protected <input type="checkbox"/> 1 – copyright protected
toolsUsed	XDAS_Int16	Output	5 bit field which indicates the tools used to encode the stream Bit4 Bit3 Bit2 Bit1 Bit0 PULSE PNS TNS IS MS <input type="checkbox"/> 0 – tool not present <input type="checkbox"/> 1 – tool present
pcePresent	XDAS_Int16	Output	Indicates if program configuration element is present in the stream or not <input type="checkbox"/> 0 – pce Not present <input type="checkbox"/> 1 – pce present
sixChannelMode	XDAS_Int32	Output	Indicates if the decoder is working in 6 channel mode or stereo mode 0 – 2 channel mode 1 – 6 channel mode
sbrPresent	XDAS_Int16	Output	Indicates if SBR is present in bit-stream or not : <input type="checkbox"/> 0 – Indicates SBR is not present in the bitstream <input type="checkbox"/> 1 – Indicates SBR is present in the bitstream
psPresent	XDAS_Int16	Output	Indicates if PS is present in bit-stream or not : <input type="checkbox"/> 0 – Indicates PS is not present in the bitstream <input type="checkbox"/> 1 – Indicates PS is present in the bit-stream

Field	Datatype	Input/ Output	Description
isARIBDownMixed	XDAS_Int32	Output	Flag to indicate type of downmixing <input type="checkbox"/> 1 – Indicates ARIB downmixed. <input type="checkbox"/> 0 – Indicates ISO/IEC 13818-8 standard downmixed. isARIBDownMixed should be interpreted only for the streams with more than two channels.
pseudoSurroundEnable	XDAS_Int32	Output	Flag to indicate if pseudo_surround_enable field in the bit-stream is set or not. <input type="checkbox"/> 1 – Indicates pseudo_surround_enable is not set. 0 – Indicates pseudo_surround_enable is set.

4.2.2.5 IAACDEC_OutArgs

|| Description

This structure defines the run-time output arguments for the MPEG4AAC HE Decoder instance object.

|| Fields

Field	Datatype	Input/ Output	Description
auddec_outArgs	IAUDDEC1_OutArgs	Output	See IAUDDEC1_OutArgs data structure for details.

4.3 Interface Functions

This section describes the Application Programming Interfaces (APIs) used in the MPEG4AAC HE Decoder. The APIs are logically grouped into the following categories:

- ❑ **Creation** – `algNumAlloc()`, `algAlloc()`
- ❑ **Initialization** – `algInit()`
- ❑ **Control** – `control()`
- ❑ **Data processing** – `algActivate()`, `process()`, `algDeactivate()`
- ❑ **Termination** – `algFree()`

You must call these APIs in the following sequence:

- 1) `algNumAlloc()`
- 2) `algAlloc()`
- 3) `algInit()`
- 4) `algActivate()`
- 5) `process()`
- 6) `algDeactivate()`
- 7) `algFree()`

`control()` can be called any time after calling the `algInit()` API.

`algNumAlloc()`, `algAlloc()`, `algInit()`, `algActivate()`, `algDeactivate()`, and `algFree()` are standard XDAIS APIs. This document includes only a brief description for the standard XDAIS APIs. For more details, see *TMS320 DSP Algorithm Standard API Reference* (literature number SPRU360).

Note:

Audio codecs do not use <code>algActivate()</code> and <code>algDeactivate()</code> APIs.

4.3.1 Creation APIs

Creation APIs are used to create an instance of the component. The term creation could mean allocating system resources, typically memory.

|| Name

`algNumAlloc()` – determine the number of buffers that an algorithm requires

|| Synopsis

```
XDAS_Int32 algNumAlloc(Void);
```

|| Arguments

Void

|| Return Value

```
XDAS_Int32; /* number of buffers required */
```

|| Description

`algNumAlloc()` returns the number of buffers that the `algAlloc()` method requires. This operation allows you to allocate sufficient space to call the `algAlloc()` method.

`algNumAlloc()` may be called at any time and can be called repeatedly without any side effects. It always returns the same result. The `algNumAlloc()` API is optional.

For more details, see *TMS320 DSP Algorithm Standard API Reference* (literature number SPRU360).

|| See Also

`algAlloc()`

|| Name

`algAlloc()` – determine the attributes of all buffers that an algorithm requires

|| Synopsis

```
XDAS_Int32 algAlloc(const IALG_Params *params, IALG_Fxns
**parentFxns, IALG_MemRec memTab[]);
```

|| Arguments

```
IALG_Params *params; /* algorithm specific attributes */
```

```
IALG_Fxns **parentFxns; /* output parent algorithm
functions */
```

```
IALG_MemRec memTab[]; /* output array of memory records */
```

|| Return Value

```
XDAS_Int32 /* number of buffers required */
```

|| Description

`algAlloc()` returns a table of memory records that describe the size, alignment, type, and memory space of all buffers required by an algorithm. If successful, this function returns a positive non-zero value indicating the number of records initialized.

The first argument to `algAlloc()` is a pointer to a structure that defines the creation parameters. This pointer may be `NULL`; however, in this case, `algAlloc()` must assume default creation parameters and must not fail.

The second argument to `algAlloc()` is an output parameter. `algAlloc()` may return a pointer to its parent's IALG functions. If an algorithm does not require a parent object to be created, this pointer must be set to `NULL`.

The third argument is a pointer to a memory space of size `nbufs * sizeof(IALG_MemRec)` where, `nbufs` is the number of buffers returned by `algNumAlloc()` and `IALG_MemRec` is the buffer-descriptor structure defined in `ialg.h`.

After calling this function, `memTab[]` is filled up with the memory requirements of an algorithm.

For more details, see *TMS320 DSP Algorithm Standard API Reference* (literature number SPRU360).

|| See Also

`algNumAlloc()`, `algFree()`

4.3.2 Initialization API

Initialization API is used to initialize an instance of the algorithm. The initialization parameters are defined in the `Params` structure (see Data Structures section for details).

|| Name

`algInit()` – initialize an algorithm instance

|| Synopsis

```
XDAS_Int32 algInit(IALG_Handle handle, IALG_MemRec
memTab[], IALG_Handle parent, IALG_Params *params);
```

|| Arguments

```
IALG_Handle handle; /* algorithm instance handle*/
IALG_MemRec memTab[]; /* array of allocated buffers */
IALG_Handle parent; /* handle to the parent instance */
IALG_Params *params; /* algorithm initialization
parameters */
```

|| Return Value

```
IALG_EOK; /* status indicating success */
IALG_EFAIL; /* status indicating failure */
```

|| Description

`algInit()` performs all initialization necessary to complete the run-time creation of an algorithm instance object. After a successful return from `algInit()`, the instance object is ready to be used to process data.

The first argument to `algInit()` is a handle to an algorithm instance. This value is initialized to the base field of `memTab[0]`.

The second argument is a table of memory records that describe the base address, size, alignment, type, and memory space of all buffers allocated for an algorithm instance. The number of initialized records is identical to the number returned by a prior call to `algAlloc()`.

The third argument is a handle to the parent instance object. If there is no parent object, this parameter must be set to `NULL`.

The last argument is a pointer to a structure that defines the algorithm initialization parameters.

For more details, see *TMS320 DSP Algorithm Standard API Reference* (literature number SPRU360).

|| See Also

`algAlloc()`, `algMoved()`

4.3.3 Control API

Control API is used for controlling the functioning of the algorithm instance during run-time. This is done by changing the status of the controllable parameters of the algorithm during run-time. These controllable parameters are defined in the `Status` data structure (see Data Structures section for details).

|| Name

`control()` – change run-time parameters and query the status

|| Synopsis

```
XDAS_Int32 (*control) (IAUDDEC1_Handle handle,  
IAUDDEC1_Cmd id, IAUDDEC1_DynamicParams *params,  
IAUDDEC1_Status *status);
```

|| Arguments

```
IAUDDEC1_Handle handle; /* algorithm instance handle */  
IAUDDEC1_Cmd id; /* algorithm specific control commands*/  
IAUDDEC1_DynamicParams *params /* algorithm run-time  
parameters */  
IAUDDEC1_Status *status /* algorithm instance status  
parameters */
```

|| Return Value

```
IALG_EOK; /* status indicating success */  
IALG_EFAIL; /* status indicating failure */
```

|| Description

This function changes the run-time parameters of an algorithm instance and queries the algorithm's status. `control()` must only be called after a successful call to `algInit()` and must never be called after a call to `algFree()`.

The first argument to `control()` is a handle to an algorithm instance.

The second argument is an algorithm specific control command. See `XDM_CmdId` enumeration for details.

The third and fourth arguments are pointers to the `IAUDDEC1_DynamicParams` and `IAUDDEC1_Status` data structures respectively.

Note:

If you are using extended data structures, the third and fourth arguments must be pointers to the extended `DynamicParams` and `Status` data structures respectively. Also, ensure that the `size` field is set to the size of the extended data structure. Depending on the value set for the `size` field, the algorithm uses either basic or extended parameters.

|| Preconditions

The following conditions must be true prior to calling this function; otherwise, its operation is undefined.

- ❑ `control()` can only be called after a successful return from `algInit()` and `algActivate()`.
- ❑ If algorithm uses DMA resources, `control()` can only be called after a successful return from `DMAN3_init()`.
- ❑ `handle` must be a valid handle for the algorithm's instance object.

|| Postconditions

The following conditions are true immediately after returning from this function.

- ❑ If the control operation is successful, the return value from this operation is equal to `IALG_EOK`; otherwise it is equal to either `IALG_EFAIL` or an algorithm specific return value.
- ❑ If the control command is not recognized, the return value from this operation is not equal to `IALG_EOK`.

|| Example

See test application file, `TestAppDecoder.c` available in the `\Client\Test\Src` sub-directory.

|| See Also

`algInit()`, `algActivate()`, `process()`

Note:

Audio codecs do not use `algActivate()`, `algDeactivate()`, and `DMAN3_init()` APIs.

4.3.4 Data Processing API

Data processing API is used for processing the input data.

|| Name

`process()` – basic encoding/decoding call

|| Synopsis

```
XIDAS_Int32 (*process)(IAUDDEC1_Handle handle, XDM1_BufDesc
*inBufs, XDM1_BufDesc *outBufs, IAUDDEC1_InArgs *inargs,
IAUDDEC1_OutArgs *outargs);
```

|| Arguments

```
IAUDDEC1_Handle handle; /* algorithm instance handle */
XDM1_BufDesc *inBufs; /* algorithm input buffer descriptor
*/
```

```
XDM1_BufDesc *outBufs; /* algorithm output buffer
descriptor */
```

```
IAUDDEC1_InArgs *inargs /* algorithm runtime input
arguments */
```

```
IAUDDEC1_OutArgs *outargs /* algorithm runtime output
arguments */
```

|| Return Value

```
IALG_EOK; /* status indicating success */
```

```
IALG_EFAIL; /* status indicating failure */
```

|| Description

This function does the basic encoding/decoding. The first argument to `process()` is a handle to an algorithm instance.

The second and third arguments are pointers to the input and output buffer descriptor data structures respectively (see `XDM1_BufDesc` data structure for details).

The fourth argument is a pointer to the `IAUDDEC1_InArgs` data structure that defines the run-time input arguments for an algorithm instance object.

The last argument is a pointer to the `IAUDDEC1_OutArgs` data structure that defines the run-time output arguments for an algorithm instance object.

Note:

If you are using extended data structures, the fourth and fifth arguments must be pointers to the extended `InArgs` and `OutArgs` data structures respectively. Also, ensure that the `size` field is set to the size of the extended data structure. Depending on the value set for the `size` field, the algorithm uses either basic or extended parameters.

|| Preconditions

The following conditions must be true prior to calling this function; otherwise, its operation is undefined.

- ❑ `process()` can only be called after a successful return from `algInit()` and `algActivate()`.

- ❑ If algorithm uses DMA resources, `process()` can only be called after a successful return from `DMAN3_init()`.
- ❑ `handle` must be a valid handle for the algorithm's instance object.
- ❑ Buffer descriptor for input and output buffers must be valid.
- ❑ Input buffers must have valid input data.

|| Postconditions

The following conditions are true immediately after returning from this function.

- ❑ If the process operation is successful, the return value from this operation is equal to `IALG_EOK`; otherwise it is equal to either `IALG_EFAIL` or an algorithm specific return value.
- ❑ After successful return from `process()` function, `algDeactivate()` can be called.

|| Example

See test application file, `TestAppDecoder.c` available in the `\Client\Test\Src` sub-directory.

|| See Also

`algInit()`, `algDeactivate()`, `control()`

Note:

- ❑ Audio codecs do not use `algActivate()`, `algDeactivate()`, and `DMAN3_init()` APIs.
- ❑ The input data for MPEG4AAC HE Decoder is in byte format. The decoder outputs 16-bit or 24-bit (not supported) raw PCM samples in the little-endian format. The output data is either in block or interleaved format. In the block format, samples of the left channels are stored contiguously first, followed by right channel samples (that is, LLLLRRRR). In the interleaved format, left channel samples are stored followed by the right channel samples (that is, LRLRLRLR).

4.3.5 Termination API

Termination API is used to terminate the MPEG4AAC HE Decoder and free up the memory space that it uses.

|| Name

`algFree()` – determine the addresses of all memory buffers used by the algorithm

|| Synopsis

```
XDAS_Int32 algFree(IALG_Handle handle, IALG_MemRec  
memTab[]);
```

|| Arguments

```
IALG_Handle handle; /* handle to the algorithm instance */  
IALG_MemRec memTab[]; /* output array of memory records */
```

|| Return Value

```
XDAS_Int32; /* Number of buffers used by the algorithm */
```

|| Description

`algFree()` determines the addresses of all memory buffers used by the algorithm. The primary aim of doing so is to free up these memory regions after closing an instance of the algorithm.

The first argument to `algFree()` is a handle to the algorithm instance.

The second argument is a table of memory records that describe the base address, size, alignment, type, and memory space of all buffers previously allocated for the algorithm instance.

For more details, see *TMS320 DSP Algorithm Standard API Reference* (literature number SPRU360).

|| See Also

`algAlloc()`

Frequently Asked Questions

This chapter provides answers to few frequently asked questions related to using this decoder.

Table 5-1. FAQs for MPEG4 AAC-HEv2 Decoder on C64X+

Questions	Answers
Can this decoder support streams with more than 2 channels?	Decoder supports the streams with upto six channels but downmixes to stereo always.
Does this decoder support RAW streams?	Decoder needs to be informed that the stream is RAW by setting <code>dynamicParams.bRawFormat</code> to 1 and <code>dynamicParams.uSamplingRateIdx</code> to proper index. And calling <code>setParams</code> API.
Does this decoder support 24 bit PCM output?	No, Decoder supports only 16 -bit PCM output.
Will the decoder recover from error for RAW and ADIF streams?	Decoder will not recover from error in case of ADIF and RAW streams. Decoder can recover only in case of ADTS streams.

This page is intentionally left blank

Optimal Function Placement Order for Minimizing Instruction Cache Penalty

This appendix contains the optimal function placement order for minimizing cache penalty due to instruction cache misses. The program memory and MCPS performance numbers quoted in the datasheet are based on this placement. The user's application linker command file should contain the following:.

```
GROUP : {  
/* Functions in call order */  
.text:_AACDEC_TII_decode  
.text:_AACDEC_TII_GetAdifHeader  
.text:_AACDEC_TII_GetBits  
.text:_AACDEC_TII_GetProgConfig  
.text:_AACDEC_TII_DecodeBlock  
.text:_AACDEC_TII_ParseBlock  
.text:_AACDEC_TII_CRCInit  
.text:_AACDEC_TII_ResetSbrBitstream  
.text:_AACDEC_TII_BitstreamSetBookmark  
.text:_AACDEC_TII_ParseChannelElement  
.text:_AACDEC_TII_EnterChannel  
.text:_AACDEC_TII_GetIcsInfo  
.text:_AACDEC_TII_Infinit  
.text:_AACDEC_TII_CalcGsfbTable  
.text:_AACDEC_TII_GetMask  
.text:_AACDEC_TII_GetIcs  
.text:_AACDEC_TII_Huffcb  
.text:_AACDEC_TII_Hufffac  
.text:_AACDEC_TII_Huffspec  
.text:_AACDEC_TII_BitstreamDistanceFromBookmark  
.text:_AACDEC_TII_AccumulateCRCWord  
.text:_AACDEC_TII_SbrSetElementType  
.text:_AACDEC_TII_Intensity  
.text:_AACDEC_TII_InverseQuantize  
.text:_AACDEC_TII_FindMaxQptInCh  
.text:_AACDEC_TII_AdjustQptInCh  
.text:_AACDEC_TII_deinterleave  
.text:_AACDEC_TII_ApplyPNS  
.text:_AACDEC_TII_TnsDecodeSubblock2  
.text:_AACDEC_TII_TnsPostscale  
.text:_AACDEC_TII_DetermineQpt  
.text:_AACDEC_TII_IFilterBank  
.text:_AACDEC_TII_PreTwiddle  
.text:_AACDEC_TII_BitReverse  
.text:_AACDEC_TII_IFFT
```

```
.text:_AACDEC_TII_IFFTStage1and2
.text:_AACDEC_TII_IFFTStage3
.text:_AACDEC_TII_IFFTStagex
.text:_AACDEC_TII_PostTwiddle
.text:_AACDEC_TII_StateBookkeeping
.text:_AACDEC_TII_LargeWindowExpand
.text:_AACDEC_TII_OpenSbr
.text:_AACDEC_TII_InitSbrDec
.text:_AACDEC_TII_ApplySbr
.text:_AACDEC_TII_ReadSbr
.text:_AACDEC_TII_InitBitBuffer
.text:_AACDEC_TII_BufGetBits
.text:_AACDEC_TII_SbrGetHeaderData
.text:_AACDEC_TII_InitFrameData
.text:_AACDEC_TII_ResetSbrDec
.text:_AACDEC_TII_ResetSbrFreqBandTables
.text:_AACDEC_TII_SbrDecFindStartAndStopBand
.text:_AACDEC_TII_GetStartFreq
.text:_AACDEC_TII_GetStopFreq
.text:_AACDEC_TII_ShellSort
.text:_AACDEC_TII_SbrDecUpdateFreqScale
.text:_AACDEC_TII_NumberOfBands
.text:_AACDEC_TII_CalcBands
.text:_AACDEC_TII_ConstPart
.text:_AACDEC_TII_Sum
.text:_AACDEC_TII_SbrDecUpdateHiRes
.text:_AACDEC_TII_SbrDecUpdateLoRes
.text:_AACDEC_TII_SbrDecDownSampleLoRes
.text:_AACDEC_TII_SbrGetChannelPairElement
.text:_AACDEC_TII_ExtractFrameInfo
.text:_AACDEC_TII_SbrGetDirectionControlData
.text:_AACDEC_TII_SbrGetEnvelope
.text:_AACDEC_TII_DecomposeHuffcw
.text:_AACDEC_TII_SbrGetNoiseFloorData
.text:_AACDEC_TII_SbrGetAdditionalData
.text:_AACDEC_TII_ExtractExtendedData
.text:_AACDEC_TII_DecomposeSbrData
.text:_AACDEC_TII_DecomposeEnvelope
.text:_AACDEC_TII_MapLowResEnergyVal
.text:_AACDEC_TII_RequantizeEnvelopeData
.text:_AACDEC_TII_SbrDecoder
.text:_AACDEC_TII_CalculateSbrAnaFilterbank
.text:_AACDEC_TII_32_POINT_IDCT
.text:_AACDEC_TII_16_POINT_IDCT
.text:_AACDEC_TII_8_POINT_IDCT
.text:_AACDEC_TII_32_POINT_IDST
.text:_AACDEC_TII_16_POINT_IDST
.text:_AACDEC_TII_8_POINT_IDST
.text:_AACDEC_TII_GenerateHF
.text:_AACDEC_TII_InvFilteringLevelEmphasis
.text:_AACDEC_TII_CalcAutoCorr
.text:_AACDEC_TII_FindClosestEntry
.text:_AAC_TII_FractSignDiv64
.text:_AACDEC_TII_CalculateSbrEnvelope
.text:_AACDEC_TII_CreateLimiterBands
.text:_AACDEC_TII_CalculateSbrSynFilterbank
.text:_AACDEC_TII_64_POINT_DCT
.text:_AACDEC_TII_32_POINT_DCT
.text:_AACDEC_TII_16_POINT_DCT
.text:_AACDEC_TII_8_POINT_DCT
.text:_AACDEC_TII_64_POINT_DST
.text:_AACDEC_TII_32_POINT_DST
.text:_AACDEC_TII_16_POINT_DST
```

```
.text:_AACDEC_TII_8_POINT_DST
/* Other functions */
.text:_AACDEC_TII_Decoder
.text:_AACDEC_TII_setjmp
.text:_AACDEC_TII_Rounding
.text:_AACDEC_TII_SbrEnvelopeUnmapping
.text:_AACDEC_TII_WindowIPOverlapAddButterfly
.text:_AACDEC_TII_reset
.text:_AACDEC_TII_GenRandVector
.text:_AACDEC_TII_GetTns
.text:_AACDEC_TII_Rescale
.text:_AACDEC_TII_GetSbr
.text:_AACDEC_TII_CB_11_Handler
.text:_AACDEC_TII_TnsArFilter
.text:_AACDEC_TII_GetAdtsHeader
.text:_AACDEC_TII_getStatus
.text:_AACDEC_TII_control
.text:_AACDEC_TII_HuffDecodeLoop4
.text:_AACDEC_TII_HuffDecodeLoop2
.text:_AACDEC_TII_TnsDecodeCoef
.text:_AACDEC_TII_HuffDecodeLoop1
.text:_AACDEC_TII_SbrCrcCheck
.text:algAlloc:_AACDEC_TII_algAlloc
.text:_AACDEC_TII_HuffDecodeLoop0
.text:_AACDEC_TII_AccumulateCRCFromStream
.text:_AACDEC_TII_HuffDecodeLoop3
.text:_AACDEC_TII_HuffDecodeLoop5
.text:_AACDEC_TII_MSTool
.text:_AACDEC_TII_FractDiv64
.text:_AACDEC_TII_SbrGetSingleChannElelement
.text:_AACDEC_TII_init
.text:_AACDEC_TII_GetData
.text:_AACDEC_TII_SyncSeek
.text:_AACDEC_TII_DecodeNoiseFloorLevels
.text:_AACDEC_TII_GetBits_inline
.text:_AACDEC_TII_pulse_nc
.text:algInit:_AACDEC_TII_algInit
.text:_AACDEC_TII_SaturateLoop
.text:algFree:_AACDEC_TII_algFree
.text:_AACDEC_TII_IMDCTWrapper
.text:_AACDEC_TII_GetGroup
.text:_AACDEC_TII_CalcCRC
.text:_AACDEC_TII_MapMask
.text:_AACDEC_TII_CopyBitBufferState
.text:_AACDEC_TII_Random
.text:_AACDEC_TII_DecodeErrorHandler
.text:_AACDEC_TII_longjmp
.text:algNumAlloc:_AACDEC_TII_algNumAlloc
.text:_AACDEC_TII_SuperSyncSeek
.text:_AACDEC_TII_GetNrBitsAvailable
.text:_AACDEC_TII_Restarttio
.text:_AACDEC_TII_BitstreamGotoBookmark
.text:_AACDEC_TII_SmallWindowExpand
    } > PROG_MEM_SECTION
```

This page is intentionally left blank

Revision History

This revision history highlights the changes made to the SPRUED8D codec specific user guide to make it SPRUED8E.

Table B-1. Revision History for MPEG4AAC HE Decoder on C64x+

Section	Changes
Global	<ul style="list-style-type: none"> ❑ Added new Chapter, Frequently Asked Questions which provides answers to few frequently asked questions related to using this decoder. ❑ Removed Evaluation Version for this codec ❑ Updated user guide to support XDM 1.0 IAUDDEC1 ❑ Added Revision History, highlights the changes made to the SPRUED8D codec specific user guide to make it SPRUED8E.
Section 1.3	<p>Supported Services and Features:</p> <p>Removed following features:</p> <ul style="list-style-type: none"> ❑ Supports sampling frequency range of 8 khz – 96 khz as per ISO/IEC14496-3 standard. ❑ eXpressDSP Digital Media (XDM 0.9 IAUDDEC) compliant <p>Added following features:</p> <ul style="list-style-type: none"> ❑ Supports MPEG4 AAC Long Term Prediction(LTP) object type implementations. ❑ Supports Parametric Stereo AAC-HEv2, as per ISO/IEC 14496-4:AMENDMENT 11 ❑ Supports sampling frequency range of 8 kHz – 96 kHz as per ISO/IEC 14496-3 standard. ❑ Supports maximum bit-rate based on the sampling frequency as per standard. ❑ Supports bitrates ranging from 8kbps to 1152kbps. ❑ Supports both ARIB and ISO/IEC 13818-8 standard down mixing. ❑ eXpressDSP Digital Media (XDM 1.0 IAUDDEC1) compliant
Section 2.2	<p>Installing the Component:</p> <ul style="list-style-type: none"> ❑ Modified top-level directory name
Section 2.5.1	<p>Generic Configuration File</p> <ul style="list-style-type: none"> ❑ Modified sample Testvecs.cfg file