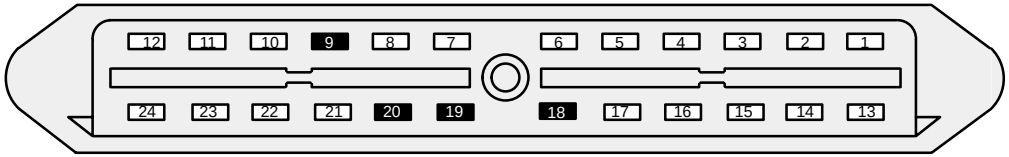

C147 (BLACK)

CONSTANT CONTROL RELAY MODULE (CCRM)

PIN	CIRCUIT	CIRCUIT FUNCTION	PIN	CIRCUIT	CIRCUIT FUNCTION
1	728 (GN/YE)	Cooling Fan Motor	13	60 (BK/WH)	Power (Hot in Start or Run)
2	728 (GN/YE)	Cooling Fan Motor	14	719 (PK/WH)	LFC Relay Control
3	10 (BK/OG)	Power (Hot at All Times)	15	999 (BK/YE)	Ground
4	10 (BK/OG)	Power (Hot at All Times)	16	732 (RD)	A/C Clutch Coil Ground
5	102 (BK/PK)	Fuel Pump Output	17	866 (RD/BK)	HFC Relay Control
6	711 (YE)	Cooling Fan Motor (High Speed)	18	–	NOT USED
7	711 (YE)	Cooling Fan Motor (High Speed)	19	–	NOT USED
8	9 (WH/GN)	Power (Hot at All Times)	20	–	NOT USED
9	–	NOT USED	21	710 (WH)	Powertrain Control Module (PCM)
10	9 (WH/GN)	Power (Hot at All Times)	22	702 (BU/BK)	Powertrain Control Module (PCM)
11	15 (BU/YE)	Power (Hot at All Times)	23	731 (BU/WH)	A/C Clutch Coil Field
12	100 (RD/WH)	PCM Relay Control Line	24	101 (WH/RD)	PCM Relay Control Line

CONNECTOR REFERENCE LIST

CONNECTOR	SECTION-PAGE
C110	13-13
C212	23-9, 24-11
C220	13-15