C290a

14401

Audio unit,
DM100

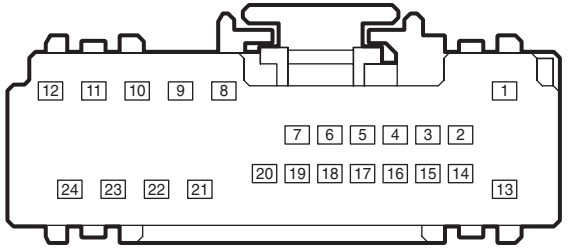

2L1T-14A464-CA (F)

Pin	Circuit	Circuit Function
1	1001 (WH/YE)	Fused battery feed to module, GEM-input
2	1002 (BK/PK)	Fused ignition "run/accessory" to module, GEM-input
3	434 (LB/BK)	Relay to day/night illumination lamps
4	1205 (BK)	General ground (type 4 ground)
5	—	not used
6	—	not used
7	1200 (LB/BK)	Voice activation module - PTA radio
8	804 (OG/LG)	Speaker voice coil feed-front (left channel)
9	800 (GY/LB)	Amplifier/speaker switch feed to left rear speaker
10	802 (OG/RD)	Amplifier/speaker switch feed to right rear speaker
11	805 (WH/LG)	Speaker voice coil feed-front (right channel)
12	811 (DG/OG)	Speaker switch ground to right front speaker
13	1203 (BK/LB)	Electronic module logic ground (type 2 ground)
14	679 (GY/BK)	Vehicle speed signal - plus to module, powertrain control
15	1000 (RD/BK)	Fused ignition "start" to module, gem-input
16	—	not used
17	—	not used
18	595 (LB/RD)	Radio receiver to redundant radio control
19	—	not used
20	689 (DB)	Logic mute
21	813 (LB/WH)	Speaker switch ground to left front speaker
22	801 (TN/YE)	Amplifier/speaker switch ground to left rear speaker
23	803 (BN/PK)	Amplifier/speaker switch ground to right rear speaker
24	—	not used

C290b

14401

Audio unit,
DM100



2L1T-14A464-EA (F)

Pin	Circuit	Circuit Function
1	1559 (RD)	Rear seat entertainment mod. low-line audio signal-radio (left+)
2	1560 (WH)	Rear seat entertainment mod. low-line audio signal-radio (left-)
3	—	not used
4	1198 (WH)	Voice activation module - audio out positive
5	1199 (GY/BK)	Voice activation module - audio out negative
6	1068 (LG/BK)	Audio system on (ASYSON)
7	832 (LB/PK)	J1708 Bus/audio corporate protocol A
8	833 (TN)	J1708 Bus/audio corporate protocol B
9	1561 (OG)	Rear seat entertainment mod. low-line audio signal-radio (Right+)
10	1562 (YE)	Rear seat entertainment mod. low-line audio signal-radio (Right-)
11	—	not used
12	—	not used
13	—	not used
14	—	not used
15	—	not used
16	—	not used