C283b

14A005

P62
Auxiliary Junction
Box (AJB), interior

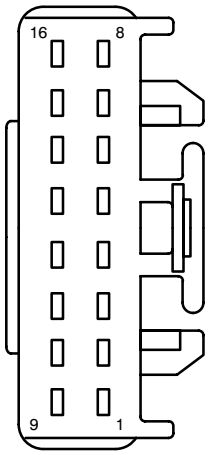

F16029

Pin	Circuit	Circuit Function
1	29S-LH1 (OG/YE)	Voltage supplied at all times (overload protected), Switched
2	9-LC34 (BN)	Sensor signal return (reference/ ground)
3	29S-LC3 (OG)	Voltage supplied at all times (overload protected), Switched
4	5-GP8 (BU/YE)	Data link, bus negative
5	–	not used
6	91-DH15 (BN/GN)	Ground
7	29S-LC34 (OG/YE)	Voltage supplied at all times (overload protected), Switched
8	4-GP8 (GY/BK)	Data link, bus positive
9	–	not used
10	29S-LH16 (OG)	Voltage supplied at all times (overload protected), Switched
11	29S-AD2 (OG/BU)	Voltage supplied at all times (overload protected), Switched
12	5-EG12 (BU/OG)	Data link, bus negative
13	–	not used
14	–	not used
15	29S-LC5 (OG/GN)	Voltage supplied at all times (overload protected), Switched
16	4-EG12 (GY/WH)	Data link, bus positive

C283c

14290

P62
Auxiliary Junction
Box (AJB), interior



F10063

Pin	Circuit	Circuit Function
1	5-RE8 (BU)	Data link, bus negative
2	–	not used
3	–	not used
4	4-RE8 (GY)	Data link, bus positive
5	4-CF6 (GY)	Data link, bus positive
6	5-CF6 (BU)	Data link, bus negative
7	–	not used
8	5-EG11 (BU)	Data link, bus negative
9	4-CF53 (GY/WH)	Data link, bus positive
10	4-EG11 (GY)	Data link, bus positive