C196

13076

R5
Daytime running
lamps resistor



F02101

Pin	Circuit	Circuit function
1	471 (OG/LG)	Daytime running lamps resistor, to, Headlamp relay
2	544 (VT)	Voltage supplied at all times (overload protected)

C197

12A568

M8
Starter motor
(11002)



F01085

Pin	Circuit	Circuit function
1	290 (GY)	Voltage supplied at all times (fusible link)

C201a

14401

A112
Generic Electronic
Module (GEM)
(14B205)

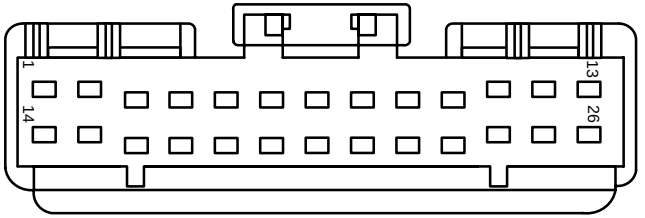

F26014

Pin	Circuit	Circuit function
1	686 (TN/RD)	Washer motor relay, control
2	647 (GY/LB)	Wiper high/low relay, control
3	646 (YE/WH)	Wiper run/park relay, control
4	–	not used
5	346 (BK/WH)	Door ajar switch, right rear, signal
6	680 (LB/OG)	Wiper/washer, delay input
7	–	not used
8	–	not used
9	–	not used
10	–	not used
11	–	not used
12	163 (RD/OG)	Driver door unlock relay, switched power
13	20 (WH/LB)	Voltage supplied in Start and Run (overload protected)
14	67 (LB)	Wiper run/park relay, switched output
15	158 (BK/PK)	Key warning switch (11A127), input
16	344 (BK/Y)	Door ajar switch, left front, except late production with automatic transmission
17	257 (WH/RD)	Main light switch (11654), to, Generic Electronic Module (GEM) (14B205)
18	640 (RD/YE)	Voltage supplied in Start and Run (overload protected)
19	345 (BK/PK)	Door ajar switch, right front, signal
20	682 (DB)	Wiper/washer, return
21	–	not used
22	353 (LB)	Vehicle Speed Sensor (VSS) +
23	684 (PK/YE)	Wiper/washer, input
24	–	not used
25	70 (LB/WH)	ISO Bus
26	676 (PK/OG)	Vehicle Speed Sensor (VSS) –