41-3 REAR AIR SUSPENSION (RAS)

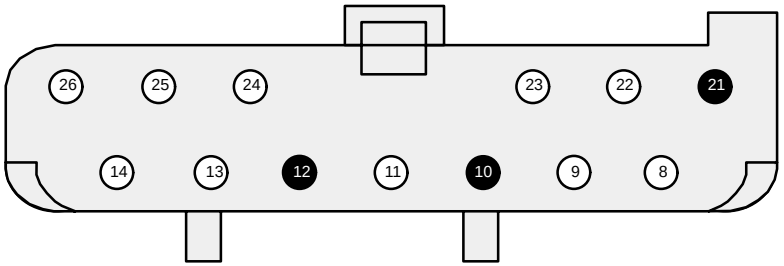

C215 (BLACK)

AIR SUSPENSION/EVO STEERING MODULE

PIN	CIRCUIT	CIRCUIT FUNCTION
8	432 (BK/PK)	Diagnostic and Height Sensor Ground
9	844 (GY/RD)	Diagnostic Input
10	–	NOT USED
11	419 (DG/LG)	Warning Lamp and Diagnostic Output
12	–	NOT USED
13	1114 (BN/VT)	LH Rear Air Spring Solenoid Control
14	86 (GY/OG)	Electronic Variable Orifice (EVO) Actuator Control
21	–	NOT USED
22	429 (VT/LG)	Linear Height Sensor Power Output
23	420 (DB/YE)	Compressor Relay Control
24	421 (PK)	Vent Solenoid Control
25	1115 (TN/WH)	RH Rear Air Spring Solenoid Control
26	87 (TN/YE)	Electric Variable Orifice (EVO) Actuator Feedback

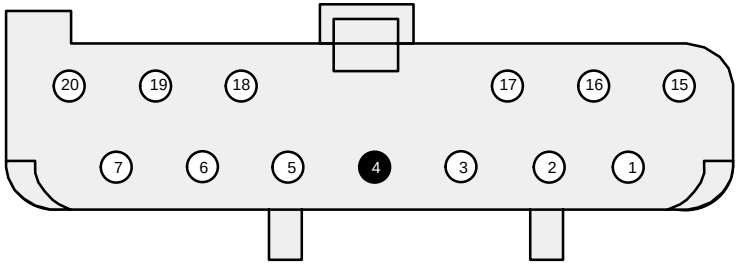

C216 (GRAY)

AIR SUSPENSION/EVO STEERING MODULE

PIN	CIRCUIT	CIRCUIT FUNCTION
1	1053 (LB/PK)	B+
2	418 (DG/YE)	Service Switch Input
3	428 (OG/BK)	Linear Height Sensor Input (LOW)
4	–	NOT USED
5	344 (BK/YE)	Door Open Input
6	57 (BK)	Ground
7	679 (GY/BK)	Vehicle Speed Sensor (VSS) Signal Input (+)
15	1053 (LB/PK)	B+
16	298 (VT/OG)	Ignition On Input
17	427 (PK/BK)	Linear Height Sensor Input (HIGH)
18	633 (RD)	Steering Wheel Rotation Rate Input
19	634 (BN)	Steering Wheel Rotation Rate Input
20	676 (PK/OG)	Vehicle Speed Sensor (VSS) Signal Input (–)