## C403a

### 18W862

A218
Cellular phone module




F12103

| Pin | Circuit | Circuit Function |
|---|---|---|
| 1 | 709 (GY) | Receive audio unit |
| 2 | – | not used |
| 3 | 694 (BK/LG) | Ground |
| 4 | 1110 (LG/PK) | Voltage supplied at all times (overload protected) |
| 5 | 1002 (BK/PK) | Voltage in Run or Accessory (overload protected) |
| 6 | 708 (DG) | Transmit audio, in On/Off |
| 7 | 713 (WH) | Microphone, Ground |
| 8 | 714 (VT) | Microphone, audio |
| 9 | 1110 (LG/PK) | Voltage supplied at all times (overload protected) |
| 10 | 694 (BK/LG) | Ground |
| 11 | 711 (RD) | T–Data |
| 12 | – | not used |

## C403b

### 18W862

A218
Cellular phone module

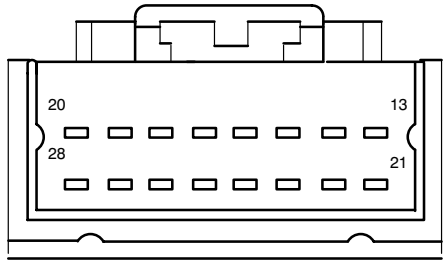


F16097

| Pin | Circuit | Circuit Function |
|---|---|---|
| 1 | 1271 (VT) | Cellular phone module, with telephone provisions |
| 2 | 710 (LB) | External battery + |
| 3 | 819 (LG/WH) | Shield |
| 4 | 723 (GY/RD) | Cellular phone, wake up |
| 5 | 716 (YE) | R–Data |
| 6 | 712 (OG) | C–Data |
| 7 | – | not used |
| 8 | 819 (LG/WH) | Shield |
| 9 | 832 (LB/PK) | Audio corporate protocol A |
| 10 | 833 (TN) | Audio corporate protocol B |
| 11 | 1272 (WH) | Cellular phone module, with telephone provisions |
| 12 | 718 (BK) | Handset, logic ground |
| 13 | 717 (TN) | Handset, audio ground |
| 14 | 724 (LB/YE) | Radio (18806), to cellular phone, audio – |
| 15 | 725 (PK) | Radio (18806), to cellular phone, audio + |
| 16 | 48 | phone audio drain |