C271a (DG)

14401

Front blower motor speed controller (19E624)



F05083

Pin	Circuit	Circuit function
1	184 (TN/OG)	Blower motor speed controller, signal
2	399 (BN/YE)	Blower motor relay, switched power
3	–	not used
4	–	not used
5	57 (BK)	Ground

C271b (WH)

18B518

Front blower motor speed controller (19E624)



F02020

Pin	Circuit	Circuit function
1	755 (BN/WH)	Front blower motor (19805), feed
2	757 (RD/WH)	Front blower motor (19805), control

C274a (GY)

14A005

Central security module

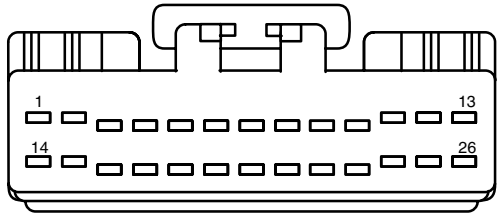

F26015

Pin	Circuit	Circuit function
1	163 (RD/OG)	Door lock actuator, left front, output
2	–	not used
3	70 (LB/WH)	ISO Bus
4	–	not used
5	78 (LB/YE)	Key pad button 1/2, signal
6	79 (LG/RD)	Key pad button 3/4, signal
7	122 (YE)	Key pad button 7/8, signal
8	123 (RD)	Key pad button 9/0, signal
9	–	not used
10	1 (DB)	Horn relay, control
11	999 (LB/WH)	GEM/Central security module door ajar
12	140 (BK/PK)	Voltage supplied in reverse
13	–	not used
14	57 (BK)	Ground
15	124 (BN)	Key pad common
16	–	not used
17	–	not used
18	–	not used
19	121 (YE/BK)	Key pad button 5/6, signal
20	–	not used
21	–	not used
22	–	not used
23	–	not used
24	–	not used
25	640 (RD/YE)	Voltage supplied in Start and Run (overload protected)
26	810 (RD/LG)	Brake pedal position switch (13480), input