C270c (GY)

14A005

P91
Central Junction
Box (CJB)

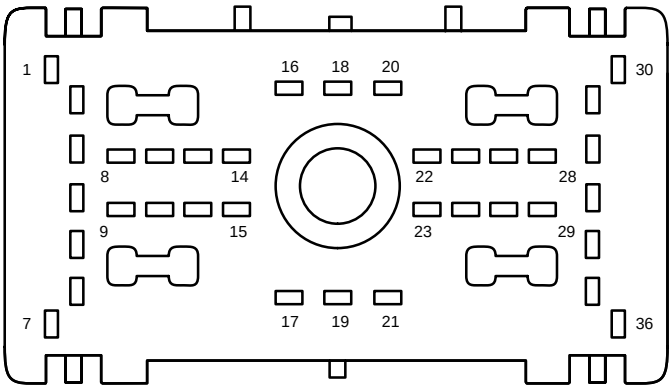

F36001

Pin	Circuit	Circuit Function
1	–	not used
2	1015 (RD/WH)	Door lock actuator, feed, Left front side
3	117 (PK/BK)	Door lock, output
4	118 (PK/OG)	Door unlock, output
5	991 (TN/LB)	Master window adjust switch, feed, Down
6	996 (OG/WH)	Window motor, feed, Down
7	–	not used
8	–	not used
9	118 (PK/OG)	Door unlock, output
10	–	not used
11	–	not used
12	705 (LG/OG)	Battery saver relay, switched power
13	–	not used
14	543 (DG)	Voltage supplied at all times (overload protected)
	543 (DG)	Voltage supplied at all times (overload protected)
15	–	not used
16	118 (PK/OG)	Door unlock, output
	1015 (RD/WH)	Door unlock, output
17	400 (LB/BK)	Accessory relay, switched power, output
18	185 (BK)	Rear window defrost relay, switched power
	186 (BN/LB)	Rear window defrost relay, switched power
19	490 (RD)	Voltage supplied at all times (overload protected)

Pin	Circuit	Circuit Function
20	992 (WH/BK)	Master window adjust switch, feed, Up
21	57 (BK)	Ground
22	53 (BK/LB)	Interior lamp relay, switched power, output
23	–	not used
24	–	not used
25	–	not used
26	1044 (WH/YE)	Voltage supplied in Start and Run (overload protected)
	1044 (WH/YE)	Voltage supplied in Start and Run (overload protected)
27	–	not used
28	1092 (PK/OG)	Voltage supplied at all times (overload protected)
29	–	not used
30	1002 (BK/PK)	Voltage in Run or Accessory (overload protected)
31	10 (LG/RD)	Voltage supplied at all times (overload protected)
32	10 (LG/RD)	Voltage supplied at all times (overload protected)
33	84 (VT/YE)	Voltage supplied at all times (overload protected)
34	14 (BN)	Power, Exterior lamps
35	1002 (BK/PK)	Voltage in Run or Accessory (overload protected)
36	59 (DG/VT)	Fused rear window defrost relay, switched power
	59 (DG/VT)	Fused rear window defrost relay, switched power