C949

18B971

A433
DVD player

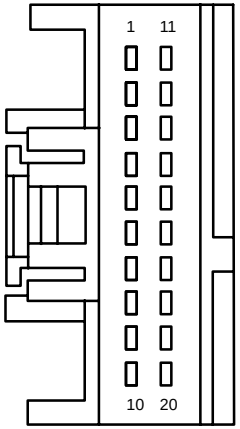

F20057

Pin	Circuit	Circuit function
1	1001 (WH/YE)	Voltage supplied at all times (overload protected)
2	1002 (BK/PK)	Accessory delay, switched power, output
3	1203 (BK/LB)	Ground
4	–	not used
5	–	not used
6	–	not used
6	–	not used
7	–	not used
8	–	not used
9	–	not used
10	1559 (RD)	DVD player to Audio unit (18808), Left +
11	1560 (WH)	DVD player to Audio unit (18808), Left –
12	1561 (OG)	DVD player to Audio unit (18808), Right +
13	1562 (YE)	DVD player to Audio unit (18808), Right –
14	48	Shield
15	235 (RD/BK)	Switch illumination, control
16	1205 (BK)	Ground
17	–	not used
18	832 (LB/PK)	Audio corporate protocol A
19	833 (TN)	Audio corporate protocol B
20	1068 (LG/BK)	Audio System ON (ASYSON)

C1000

14398

K5
Daytime Running
Lamps (DRL) relay



F05110

Pin	Circuit	Circuit function
1	1205 (BK)	Ground
2	15 (RD/YE)	Power, Hot with Headlamps on
3	15 (RD/YE)	Power, Hot with Headlamps on
4	–	not used
5	13 (RD/BK)	Power, Hot with Low Beams on