C220c (WH)

14401

Instrument cluster

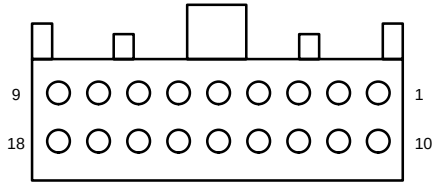

F18013

Pin	Circuit	Circuit function
1	570 (BK/WH)	Ground
2	640 (RD/YE)	Voltage supplied in Start and Run (overload protected)
3	1002 (BK/PK)	Voltage in Run or Accessory (overload protected)
4	956 (OG/LG)	Voltage supplied at all times (overload protected)
5	57 (BK)	Ground
6	–	not used
7	914 (TN/OG)	SCP Bus +
8	915 (PK/LB)	SCP Bus –
9	919 (GY/BK)	Park lamp relay, switched output
10	235 (RD/BK)	not used
11	–	not used
12	977 (VT/WH)	switch sense, Brake fluid level switch (2L414)
13	–	not used
14	–	not used
15	2 (WH/LB)	Turn lamps, feed, right front
16	904 (LG/RD)	Generator/Battery indicator, control
17	253 (DG/WH)	Oil pressure switch (9278), input
18	19 (LB/RD)	Instrument illumination, feed

C241 (BN)

14401

Rear window defrost switch (18578)



F08060

Pin	Circuit	Circuit function
1	1010 (DB/OG)	Rear window defrost switch (18578), switch sense
2	57 (BK)	Ground
3	–	not used
4	57 (BK)	Ground
5	–	not used
6	186 (BN/LB)	Rear window defrost relay, switched output
7	–	not used
8	19 (LB/RD)	Instrument illumination, feed