135-5 CELLULAR TELEPHONE



C401

PHONE SUPPORT ELECTRONICS (PSE) MODULE

PIN	CIRCUIT	CIRCUIT FUNCTION
1	708 (DG)	Transmit Audio On/Off
2	–	NOT USED
3	694 (BK/LG)	Phone Power Return
4	1110 (LG/VT)	BATT Power
5	1002 (BK/PK)	Power (Hot in Acc or Run)
6	709 (GY)	Receives Audio to Handset
7	713 (WH)	Microphone Ground
8	714 (VT)	Microphone Audio
9	1110 (LG/VT)	BATT Power
10	694 (BK/LG)	Phone Power Return
11	716 (YE)	R-Data
12	–	NOT USED

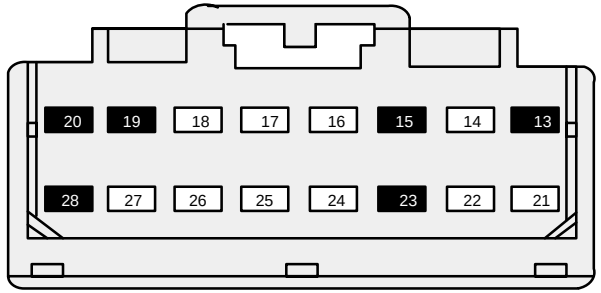

C402

PHONE SUPPORT ELECTRONICS (PSE) MODULE

PIN	CIRCUIT	CIRCUIT FUNCTION
13	–	NOT USED
14	710 (LB)	Regulated + 9.6 Volts
15	–	NOT USED
16	723 (GY/RD)	PTA (Phone Trans Active)
17	711 (RD)	T-Data
18	712 (OG)	C-Data
19	–	NOT USED
20	–	NOT USED
21	832 (LB/PK)	J1708 Bus/Audio Corporate Protocol A
22	833 (TN)	J1708 Bus/Audio Corporate Protocol B
23	–	NOT USED
24	718 (BK)	Handset Logic Ground
25	717 (TN)	Handset Audio Ground
26	724 (LB/YE)	Line Level –
27	725 (VT)	Line Level +
28	–	NOT USED