C201a

14290

A112
Generic Electronic
Module (GEM)
(14B205)



F12077

Pin	Circuit	Circuit function
1	465 (WH/LB)	Low coolant level switch, input
2	547 (LG/YE)	Brake indicator, control
3	679 (GY/BK)	Vehicle Speed Sensor (VSS) +
4	385 (WH/RD)	Voltage supplied at all times (overload protected)
5	–	not used
6	938 (BK/LG)	Ground
7	–	not used
8	–	not used
9	–	not used
10	164 (VT/LB)	Daytime Running Lamps (DRL) relay, control
11	646 (YE/WH)	Wiper run/park relay, control
12	647 (GY/LB)	Wiper high/low relay, control

C201b

14401

A112
Generic Electronic
Module (GEM)
(14B205)

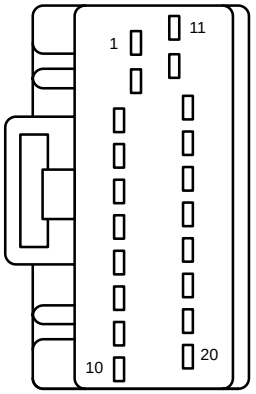

F20017

Pin	Circuit	Circuit function
1	–	not used
2	–	not used
3	70 (LB/WH)	ISO Bus
4	684 (PK/YE)	Wiper/washer, input
5	220 (VT/OG)	Autolamp On/Off signal
6	1010 (DB/OG)	Rear window defrost switch (18578), input
7	1008 (LG/OG)	Interior lamp relay, control
8	12 (LG/BK)	High beam lamp, signal
9	464 (BK/PK)	Low coolant indicator, control
10	627 (BK/OG)	Door ajar indicator, control
11	682 (DB)	Wiper/washer, return
12	–	not used
13	–	not used
14	218 (WH/VT)	Photocell and amplifier
15	680 (LB/OG)	Wiper/washer, delay input
16	–	not used
17	158 (BK/PK)	Key warning switch (11A127), input
18	–	not used
19	871 (YE)	Safety belt indicator, control
20	547 (LG/YE)	Brake indicator, control