C341b

14B719

Driver seat module (14C718)



F02375

Pin	Circuit	Circuit function
1	57 (BK)	Ground
2	490 (RD)	Voltage supplied at all times (overload protected)

C341c

14A005

Driver seat module (14C718)

* Cartier, Signature

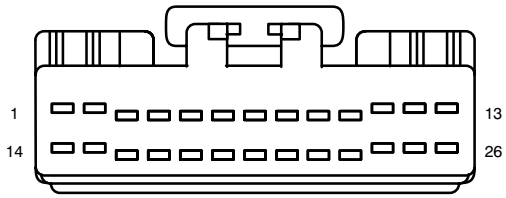

F26015

Pin	Circuit	Circuit function
1	676 (PK/OG)	Ground
2	540 (RD)	Left mirror – Right
3	541 (DB)	Left mirror – Up
4	948 (YE/LB)	Left mirror – Down
5	544 (VT)	Right mirror – Up
6	953 (WH/VT)	Right mirror – Down
7	952 (WH/LG)	Right mirror – Left
8	543 (DG)	Right mirror – Right
9	949 (RD/WH)	Left mirror, Right/Left mirror movement, position, signal
10	951 (DB/WH)	Left mirror, Up/Down mirror movement, position, signal
11	954 (DG/WH)	Right mirror, Right/Left mirror movement, position, signal
12	957 (VT/WH)	Right mirror, Up/Down mirror movement, position, signal
13	955 (GY)	common
14	*797 (LG/VT)	Voltage supplied at all times (overload protected)
15	958 (GY/RD)	feed
16	947 (YE/RD)	Left mirror – Left
17	–	not used
18	1493 (PK/BK)	memory, Adjustable pedal switch, Forward
19	1491 (LB/YE)	Adjustable pedal memory potentiometer
20	1492 (LB/RD)	memory, Adjustable pedal switch, Rearward
21	–	not used
22	–	not used
23	–	not used
24	–	not used
25	914 (TN/OG)	SCP Bus +
26	915 (PK/LB)	SCP Bus –