C228b

14401

A205
Electronic Automatic Temperature Control (EATC) module (19980)

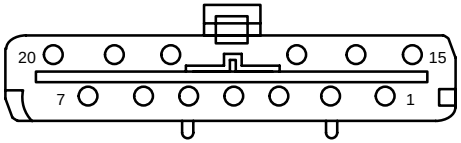

F13003

Pin	Circuit	Circuit function
1	915 (PK/LB)	SCP Bus –
2	729 (RD/WH)	Voltage supplied at all times (overload protected)
3	57 (BK)	Ground
4	470 (PK/BK)	Sensor signal return (reference/ground)
5	–	not used
6	243 (LG/OG)	Reference voltage, to, Blend door actuator
7	767 (LB/OG)	Ambient air temperature sensor (19E702), feed
15	914 (TN/OG)	SCP Bus +
16	296 (WH/VT)	Fused accessory relay, switched power, output
17	461 (OG)	Switched ground, to, Blower motor relay
18	246 (VT)	Temperature blend door actuator (19E616), signal
19	434 (LB/BK)	Analog dimming, feed
20	468 (BN)	Sunload sensor (19E663), input

C229a

14B079

A246
Audio Visual Navigation (AVN) module (10E887)

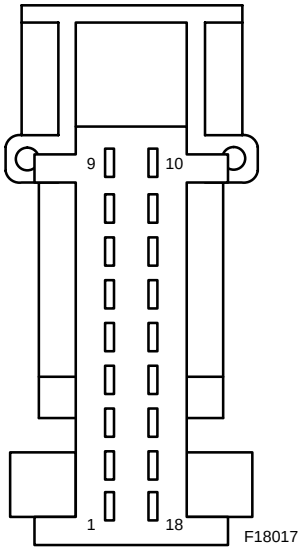

F18017

Pin	Circuit	Circuit function
1	729 (RD/WH)	Voltage supplied at all times (overload protected)
2	1002 (BK/PK)	Voltage in Run or Accessory (overload protected)
3	1045 (DB/WH)	Illumination dimmer, output
4	–	not used
5	–	not used
6	–	not used
7	–	not used
8	1530 (LB)	Speakers (+)
9	–	not used
10	57 (BK)	Ground
11	140 (BK/PK)	Voltage supplied in reverse
12	1541 (DB)	Vehicle Speed Sensor (VSS), to, Audio/navigation control unit, output
13	–	not used
14	–	not used
15	–	not used
16	–	not used
17	1531 (LG)	Speakers (–)
18	–	not used