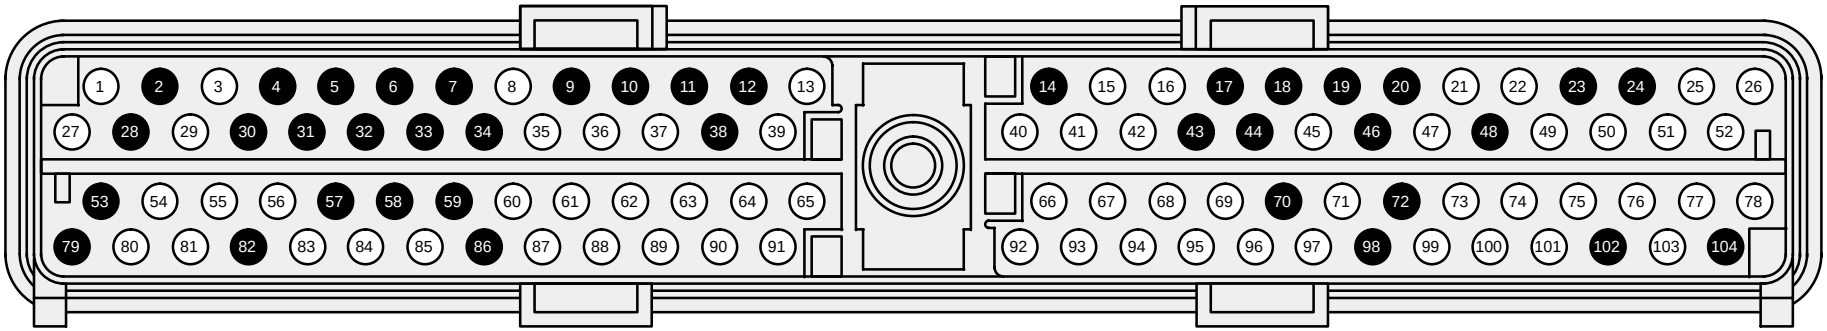

C294 (GRAY)

POWERTRAIN CONTROL MODULE (PCM)

3.8L

PIN	CIRCUIT	CIRCUIT FUNCTION	PIN	CIRCUIT	CIRCUIT FUNCTION
1	315 (VT/OG)	Shift Solenoid B (SSB)	18	–	NOT USED
2	–	NOT USED	19	–	NOT USED
3	1144 (YE/BK)	Digital Transmission Range (DTR) Sensor TR1	20	–	NOT USED
4	–	NOT USED	21	349 (DB)	Crankshaft Position (CKP) Sensor (+)
5	–	NOT USED	22	350 (GY)	Crankshaft Position (CKP) Sensor (–)
6	–	NOT USED	23	–	NOT USED
7	–	NOT USED	24	–	NOT USED
8	1022 (DB/YE)	Intake Manifold Runner Control (IMRC)	25	1205 (BK)	Case Ground
9	–	NOT USED	26	526 (DB/LG)	To Coil Driver 1 (A)
10	–	NOT USED	27	237 (OG/YE)	Shift Solenoid A (SSA)
11	–	NOT USED	28	–	NOT USED
12	–	NOT USED	29	224 (TN/WH)	Transmission Control Switch Input
13	107 (VT)	Data Link Connector (DLC) Reprogramming Power Supply Pin	30	–	NOT USED
			31	–	NOT USED
14	–	NOT USED	32	–	NOT USED
15	915 (PK/LB)	SCP Data Bus (–)	33	–	NOT USED
16	914 (TN/OG)	SCP Data Bus (+)	34	–	NOT USED
17	–	NOT USED			

PIN	CIRCUIT	CIRCUIT FUNCTION	PIN	CIRCUIT	CIRCUIT FUNCTION
35	392 (RD/LG)	Right Rear Heated Oxygen Sensor (HO2S)	71	361 (RD)	Power (VPWR)
36	968 (TN/LB)	Mass Air Flow (MAF) Sensor Return	72	–	NOT USED
37	923 (OG/BK)	Transmission Fluid Temperature (TFT) Sensor	73	559 (TN/BK)	Fuel Injector #5
38	–	NOT USED	74	557 (BN/YE)	Fuel Injector #3
39	743 (GY)	Intake Air Temperature (IAT) Sensor Input	75	555 (TN)	Fuel Injector #1
40	928 (LB/OG)	Fuel Pump Monitor Input	76	570 (BK/WH)	Power Ground (PWRGND)
41	198 (DG/OG)	Air Conditioning Cycling Switch (ACCS) Input	77	570 (BK/WH)	Power Ground (PWRGND)
42	367 (BN)	Intake Manifold Runner Control (IMRC)	78	528 (PK/WH)	To Coil Driver 3 (C)
43	–	NOT USED	79	–	NOT USED
44	–	NOT USED	80	922 (WH/RD)	Fuel Pump Relay Output
45	228 (DB)	Low Fan Control Output	81	925 (WH/YE)	Electronic Pressure Control (EPC)
46	–	NOT USED	82	–	NOT USED
47	360 (BN/PK)	EGR Vacuum Regulator Solenoid	83	264 (WH/LB)	Idle Air Control (IAC) Valve
48	–	NOT USED	84	970 (DG/WH)	Output Shaft Speed Sensor (OSS)
49	1145 (LB/BK)	Digital Transmission Range (DTR) Sensor TR2	85	282 (DB/OG)	Camshaft Position (CMP) Sensor
50	1143 (WH/BK)	Digital Transmission Range (DTR) Sensor TR4	86	–	NOT USED
51	570 (BK/WH)	Power Ground	87	94 (RD/BK)	Left Front Heated Oxygen Sensor (HO2S)
52	527 (RD/LB)	To Coil Drive 2 (B)	88	967 (LB/RD)	Mass Air Flow (MAF) Sensor
53	–	NOT USED	89	355 (GY/WH)	Throttle Position (TP) Sensor
54	924 (BN/OG)	Torque Converter Clutch (TCC) Solenoid	90	351 (BN/WH)	Reference Voltage (VREF)
55	729 (RD/WH)	Keep Alive Power	91	359 (GY/RD)	Signal Return (SIGRTN)
56	191 (LG/BK)	Vapor Management Valve	92	511 (LG)	Brake Pedal Position (BPP) Switch Input
57	–	NOT USED	93	387 (RD/WH)	Right Front Heated Oxygen Sensor Heater #11
58	–	NOT USED	94	388 (YE/LB)	Left Front Heated Oxygen Sensor Heater #21
59	–	NOT USED	95	389 (WH/BK)	Right Rear Heated Oxygen Sensor (HO2S) Heater #12
60	74 (GY/LB)	Right Front Heated Oxygen Sensor (HO2S)			
61	393 (VT/LG)	Left Rear Heated Oxygen Sensor (HO2S)	96	390 (TN/YE)	Left Rear Heated Oxygen Sensor (HO2S) Output Heater #22
62	791 (RD/PK)	Fuel Tank Pressure Transducer			
63	141 (RD/PK)	Fuel Rail Pressure Transducer	97	361 (RD)	Vehicle Power (VPWR)
64	199 (LB/YE)	Digital Transmission Range (DTR) Sensor TR3A	98	–	NOT USED
65	352 (BN/LG)	Differential Pressure Feedback EGR Sensor	99	560 (LG/OG)	Fuel Injector #6 Output
66	1102 (YE/LG)	Signal Feed (SIGFEED)	100	558 (BN/LB)	Fuel Injector #4 Output
67	101 (GY/YE)	EVAP Canister Vent Solenoid	101	556 (WH)	Fuel Injector #2 Output
68	239 (WH/OG)	Vehicle Speed Signal	102	–	NOT USED
69	331 (PK/YE)	WOT A/C Cutout Relay	103	570 (BK/WH)	Power Ground (PWRGND)
70	–	NOT USED	104	–	NOT USED