C3183 (GN)

14A005

Low tire pressure module

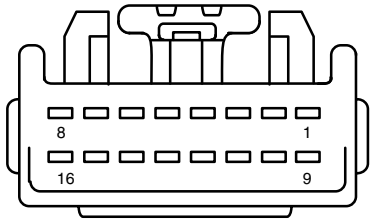

F16051

Pin	Circuit	Circuit function
1	915 (PK/LB)	SCP Bus –
2	914 (TN/OG)	SCP Bus +
3	3049 (BK/LG)	Voltage supplied at all times (overload protected)
4	1 (DB)	Horn relay, control (calibration use only)
5	1002 (BK/PK)	Voltage in Run or Accessory (overload protected)
6	57 (BK)	Ground
7	–	not used
8	–	not used
9	–	not used
10	–	not used
11	–	not used
12	–	not used
13	–	not used
14	–	not used
15	–	not used
16	–	not used

C3184a (BK)

14A005

Four–wheel drive control module (14B466)

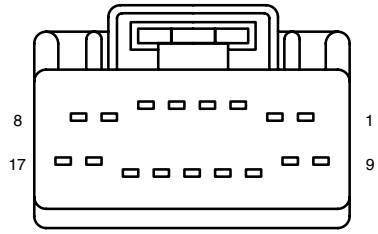

F17006

Pin	Circuit	Circuit function
1	57 (BK)	Ground
2	778 (OG)	Transfer case, High to Low, feed
3	762 (YE/WH)	Motor position, return
4	763 (OG/WH)	Motor position D
5	764 (BN/WH)	Motor position C
6	770 (WH)	Motor position B
7	771 (VT/YE)	Motor position A
8	–	not used
9	777 (YE)	Transfer case, Low to High, feed
10	–	not used
11	–	not used
12	–	not used
13	–	not used
14	–	not used
15	–	not used
16	–	not used
17	779 (BN)	Differential lock solenoid, control