C2150b

14401

N113
Main light switch
(11654)

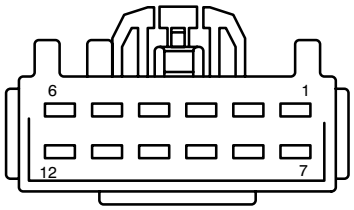

F12107

Pin	Circuit	Circuit function
1	–	not used
2	188 (WH/BK)	Hot with Headlamps on
3	–	not used
4	–	not used
5	477 (LB/BK)	Fog lamp switch, to front fog lamp, Relay
6	57 (BK)	Ground
7	–	not used
8	196 (DB/OG)	Voltage supplied at all times (overload protected)
9	15 (RD/YE)	Power, Hot with Headlamps on
10	195 (TN/WH)	Main light switch (11654), fused feed
11	257 (WH/RD)	Main light switch (11654), to, Generic Electronic Module (GEM) (14B205)
12	14 (BN)	Power, Exterior lamps

C2164

14401

N611
Low air pressure
switch, primary



F02483

Pin	Circuit	Circuit function
1	218 (WH/VT)	to, Brake differential pressure switch
2	1203 (BK/LB)	Ground

C2165

14401

N612
Low air pressure
switch, secondary



F02483

Pin	Circuit	Circuit function
1	218 (WH/VT)	to, Brake differential pressure switch
2	1203 (BK/LB)	Ground

C2166

M283
Two speed axle mo-
tor



F02019

Pin	Circuit	Circuit function
1	23 (WH)	Two speed axle relay, control
2	57 (BK)	Ground

C2167

14401

E264
Air pressure gauge
illumination



F02063

Pin	Circuit	Circuit function
1	57 (BK)	Ground
2	18	