C150 (BK)

14A584

M78
Door lock motor
driver side rear



F08083

Pin	Circuit	Circuit Function
1	33-AA59C (YE/BK)	Switched between: Battery voltage, Ground or Open
2	32-AA59C (WH/BK)	Switched between: Battery voltage, Ground or Open
3	–	not used
4	–	not used
5	–	not used
6	–	not used
7	–	not used
8	–	not used

C151 (BK)

14A584

M77
Door lock motor
passenger side rear



F08083

Pin	Circuit	Circuit Function
1	33-AA59D (YE/BK)	Switched between: Battery voltage, Ground or Open
2	32-AA59D (WH/BK)	Switched between: Battery voltage, Ground or Open
3	–	not used
4	–	not used
5	–	not used
6	–	not used
7	–	not used
8	–	not used

C200 (BK)

14401

D20
Data Link Connector
(DLC)

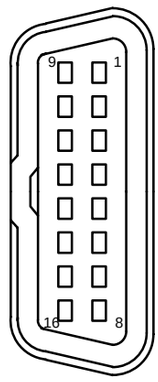

F16016

Pin	Circuit	Circuit Function
1	–	not used
2	4-EG7 (GY/RD)	Data link, bus positive
3	–	not used
4	31-RA1 (BK)	Ground
5	91-RA1 (BK/OG)	Ground
6	–	not used
7	8-EE10 (WH/BK)	Sensor signal
8	–	not used
9	–	not used
10	5-EG7 (BU/RD)	Data link, bus negative
11	–	not used
12	–	not used
13	29-RE14 (OG/BK)	Module programming signal
14	–	not used
15	–	not used
16	30-RA1 (RD)	Voltage supplied at all times (not overload protected)

C201

8C290

M37
Engine cooling fan
motor



F02012

Pin	Circuit	Circuit Function
1	31-PA6 (BK)	Ground
	15S-PA6 (GN/YE)	Voltage, ignition switch in Start or Run (not overload protected), switched
2	31-PA6 (BK)	Ground
	15S-PA6 (GN/YE)	Voltage, ignition switch in Start or Run (not overload protected), switched