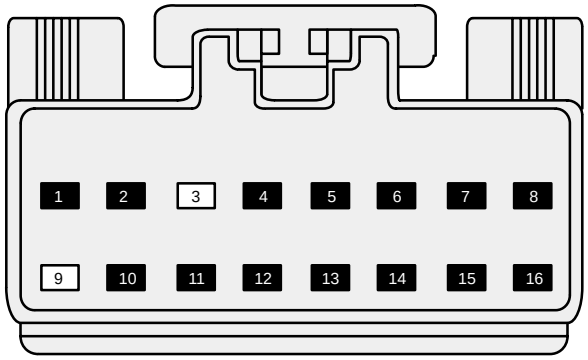


**C240 (GRAY)**
**GENERIC ELECTRONIC MODULE (GEM)**

| PIN | CIRCUIT | CIRCUIT FUNCTION |
|---|---|---|
| 1 | – | NOT USED |
| 2 | – | NOT USED |
| 3 | 999 (LB/WH) | Door Ajar Output |
| 4 | – | NOT USED |
| 5 | – | NOT USED |
| 6 | – | NOT USED |
| 7 | – | NOT USED |
| 8 | – | NOT USED |
| 9 | 1013 (BN/LG) | Illuminated Entry Input |
| 10 | – | NOT USED |
| 11 | – | NOT USED |
| 12 | – | NOT USED |
| 13 | – | NOT USED |
| 14 | – | NOT USED |
| 15 | – | NOT USED |
| 16 | – | NOT USED |

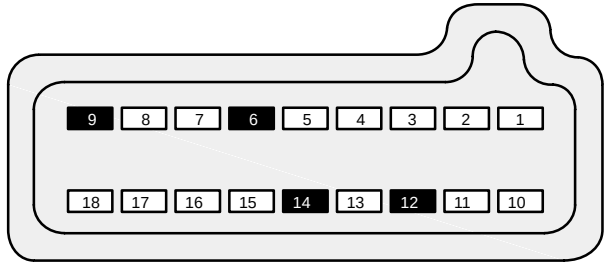


**C267**
**GENERIC ELECTRONIC MODULE (GEM)**

| PIN | CIRCUIT FUNCTION |
|---|---|
| 1 | Battery Saver Relay Coil Control |
| 2 | One Touch Down Relay Coil Control |
| 3 | Power (Hot in Run) |
| 4 | Power (Hot at All Times) |
| 5 | (Hot in Start)/Ground With Clutch Depressed Input |
| 6 | NOT USED |
| 7 | LH Window Motor Current Sense (Low) |
| 8 | LH Window Down Input |
| 9 | NOT USED |
| 10 | Vehicle Speed (–) Input |
| 11 | Accessory Delay Relay Coil Control |
| 12 | NOT USED |
| 13 | (Hot in Acc or Run) Input |
| 14 | NOT USED |
| 15 | Interior Lamp Relay Coil Control |
| 16 | Power (Hot at All Times) |
| 17 | LH Window Motor Current Sense (High) |
| 18 | Vehicle Speed Signal (+) |