C205

14401

N113
Main light switch

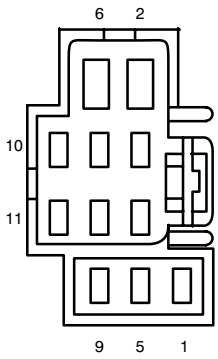

F11023

Pin	Circuit	Circuit Function
1	–	not used
2	15 (RD/YE)	Power, Hot with Headlamps on
3	1032 (WH/BK)	Trailer tow relay, feed
4	640 (RD/YE)	Voltage supplied in Start and Run (overload protected)
5	195 (TN/WH)	Voltage supplied at all times (overload protected)
6	196 (DB/OG)	Voltage supplied at all times (overload protected)
7	57 (BK)	Ground
8	484 (OG/BK)	Headlamp switch, on input
9	235 (RD/BK)	Instrument illumination, input
10	–	not used
11	–	not used

C206 (GY)

14401

A47
Instrument panel
dimming module

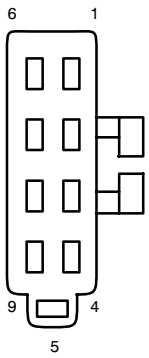

F09017

Pin	Circuit	Circuit Function
1	705 (LG/OG)	Battery saver relay, switched power
	705 (LG/OG)	Battery saver relay, switched power
2	402 (OG/LG)	Interior lamp relay, feed
3	53 (BK/LB)	Interior lamp relay, switched power, output
	53 (BK/LB)	Interior lamp relay, switched power, output
	55 (BK/PK)	Cargo lamp, output
	55 (BK/PK)	Cargo lamp, output
4	55 (BK/PK)	Cargo lamp, output
5	–	not used
6	14 (BN)	Power, Exterior lamps
	14 (BN)	Power, Exterior lamps
7	19 (LB/RD)	Radio Illumination, input
8	235 (RD/BK)	Instrument illumination, input
9	570 (BK/WH)	Ground