C2062

14401

Door lock relay



F05064

Pin	Circuit	Circuit function
1	1679 (WH/YE)	Voltage supplied at all times (overload protected)
2	119 (PK/YE)	Door lock switch, input
3	117 (PK/BK)	Door lock, output
4	57 (BK)	Ground
5	1679 (WH/YE)	Voltage supplied at all times (overload protected)

C2097 (GN)

14401

Passive anti–theft transceiver



F04363

Pin	Circuit	Circuit function
1	570 (BK/WH)	Ground
2	16 (RD/LG)	Voltage supplied in Start and Run (overload protected)
3	1216 (GY/OG)	RX, signal
4	1215 (WH/LG)	TX, signal

C2100a (BK)

14401

Generic Electronic Module (GEM) (14B205)

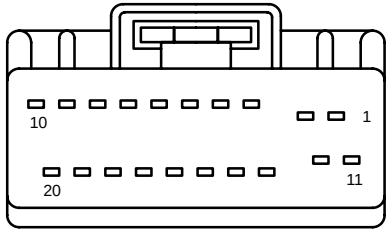

F20020

Pin	Circuit	Circuit function
1	1001 (WH/YE)	Voltage supplied at all times (overload protected)
2	570 (BK/WH)	Ground
3	70 (LB/WH)	ISO Bus
4	–	not used
5	85 (BN/LB)	Safety belt buckle switch (10B924), input
6	591 (LG)	Rear window wiper raise relay, output
7	–	not used
8	1009 (OG/YE)	Rear window defrost relay, control
9	684 (PK/YE)	Wiper/washer, input
10	680 (LB/OG)	Wiper/washer, delay input
11	995 (GY)	Window motor, feed, Down
12	996 (OG/WH)	Window motor, feed, Down
13	1010 (DB/OG)	Rear window defrost switch (18578), input
14	679 (GY/BK)	Vehicle Speed Sensor (VSS) +
15	640 (RD/YE)	Voltage supplied in Start and Run (overload protected)
16	–	not used
17	296 (WH/VT)	Voltage in Run or Accessory (overload protected)
18	158 (BK/PK)	Key warning switch (11A127), input
19	485 (PK/BK)	Rear window wiper/washer switch, input
20	1302 (WH/LG)	Multifunction switch, Signal return