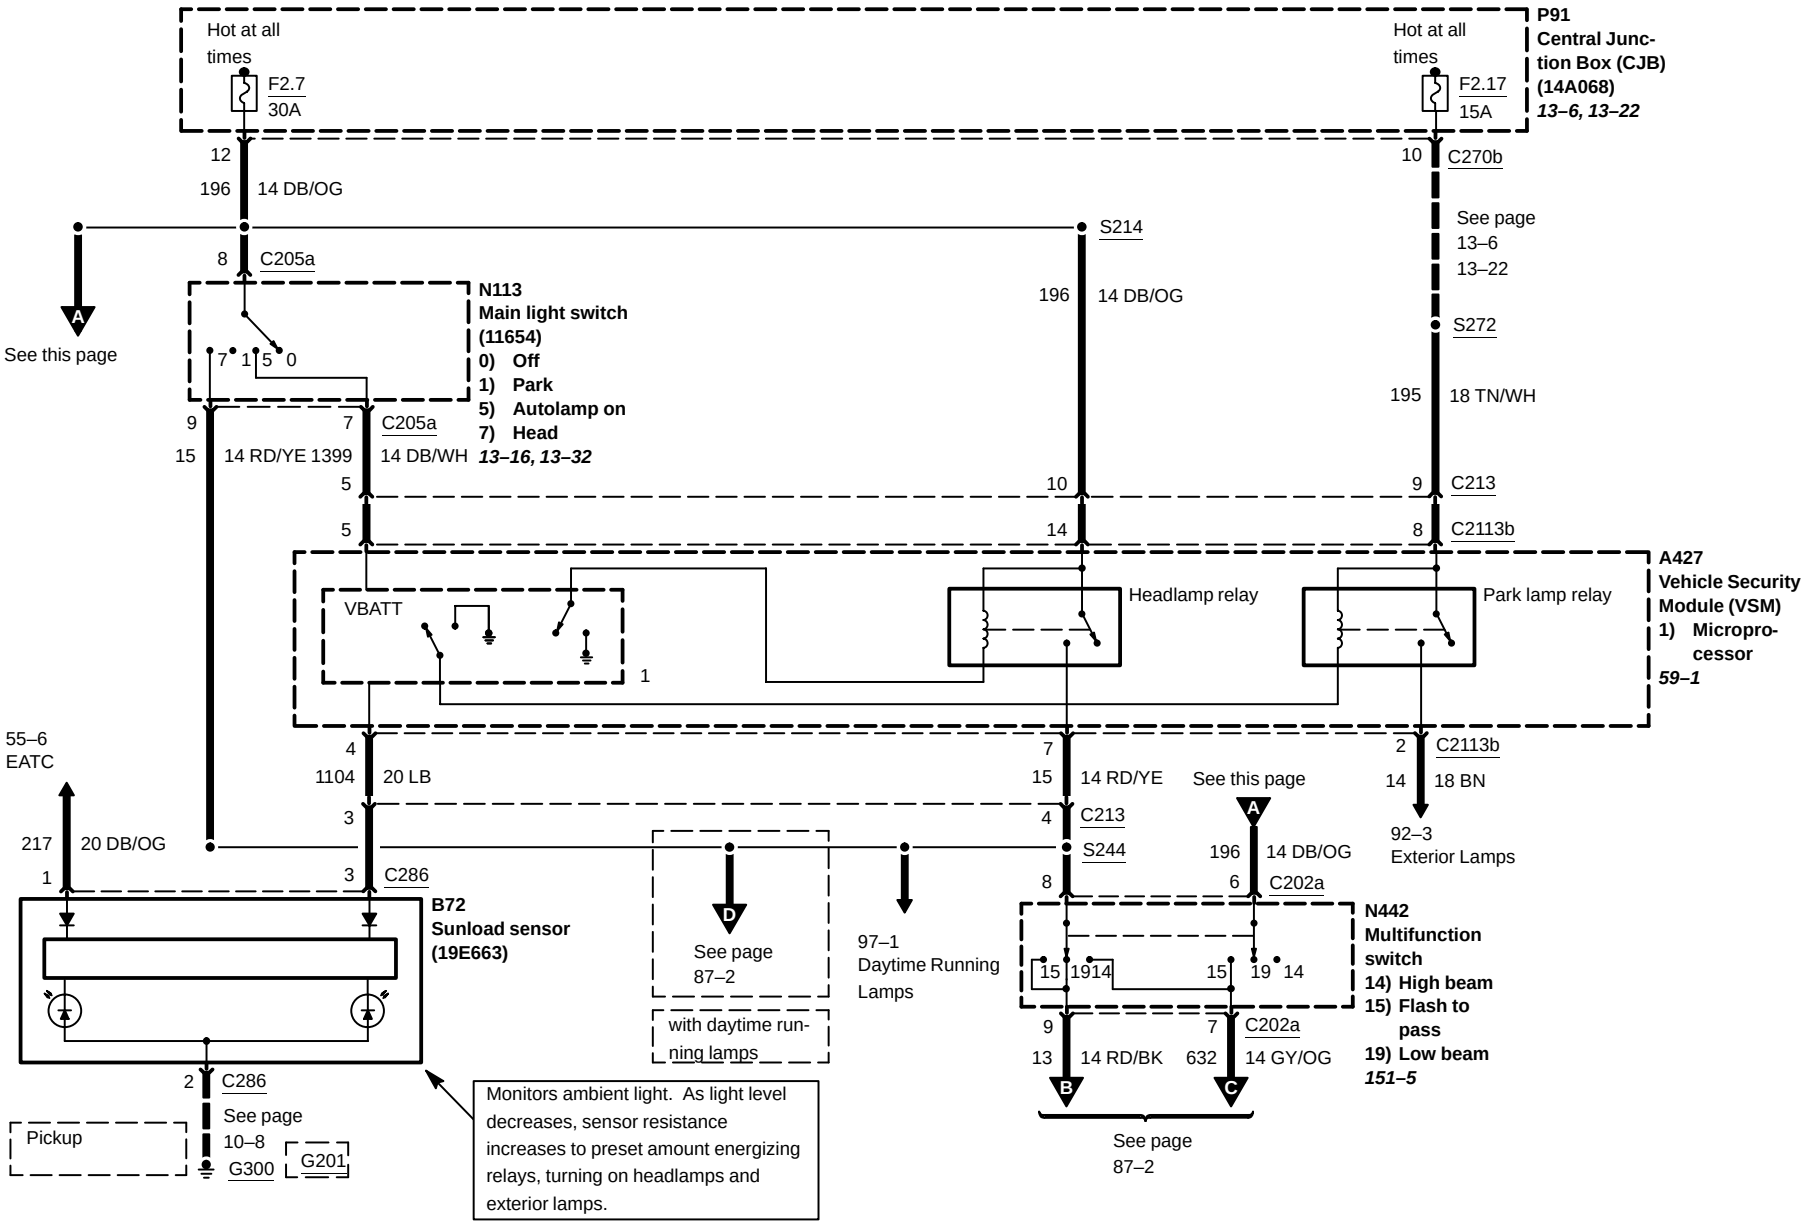
Hot at all times
F2.7
30A
Hot at all times
F2.17
15A
P91
Central Junction Box (CJB)
(14A068)
13–6, 13–22
12
196 14 DB/OG
10 C270b
See page 13–6 13–22
S214
196 14 DB/OG
S272
195 18 TN/WH
8 C205a
N113
Main light switch
(11654)
0) Off
1) Park
5) Autolamp on
7) Head
13–16, 13–32
A
See this page
7 1 5 0
9 15 14 RD/YE 1399
7 C205a
14 DB/WH
5
10 C213
5
14 C2113b
A427
Vehicle Security Module (VSM)
1) Microprocessor
59–1
VBATT
1
Headlamp relay
Park lamp relay
55–6
EATC
4 1104 20 LB
3
7 15 14 RD/YE
4 C213
2 C2113b
14 18 BN
92–3
Exterior Lamps
See this page
A
196 14 DB/OG
6 C202a
217 20 DB/OG
1
3 C286
S244
8
B72
Sunload sensor
(19E663)
D
See page 87–2
with daytime running lamps
97–1
Daytime Running Lamps
15 19 14
15 19 14
N442
Multifunction switch
14) High beam
15) Flash to pass
19) Low beam
151–5
9 13 14 RD/BK
7 632 C202a
14 GY/OG
B
C
See page 87–2
2 C286
See page 10–8
Pickup
G300
G201
Monitors ambient light. As light level decreases, sensor resistance increases to preset amount energizing relays, turning on headlamps and exterior lamps.