C2041

14401

Restraints control module (14B321)

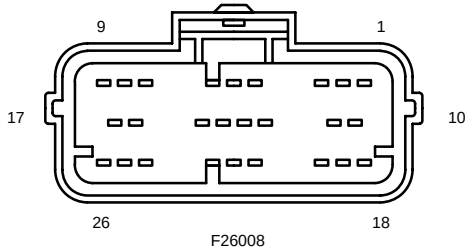

F26008

Pin	Circuit	Circuit function
1	–	not used
2	609 (OG/YE)	Voltage in Run (overload protected)
3	614 (GY/OG)	Driver air bag, feed, monitor
4	615 (GY/WH)	Driver air bag, return
5	70 (LB/WH)	ISO Bus
6	607 (LB/OG)	Passenger air bag, feed, monitor
7	616 (PK/BK)	Passenger air bag, return
8	1112 (WH/LB)	Passenger Air bag Deactivation (PAD) switch, input
9	1113 (YE/LG)	Passenger Air bag Deactivation (PAD) switch, indicator, control
10	609 (OG/YE)	Voltage in Run (overload protected) – Excursion
10	649 (BK/OG)	Ground – Pickup
11	–	not used
12	–	not used
13	609 (OG/YE)	Voltage in Run (overload protected)
14	609 (OG/YE)	Voltage in Run (overload protected) – Excursion
14	649 (BK/OG)	Ground – Pickup
15	1081 (YE/RD)	Passenger safety belt retractor pretensioner, feed
16	1082 (YE/BK)	Passenger safety belt retractor pretensioner, return
17	–	not used
18	1079 (LG/RD)	Driver safety belt retractor pretensioner, feed
19	–	not used
20	608 (BK/YE)	Air bag indicator, control
21	649 (BK/OG)	Air bag, dedicated ground
22	1080 (LG/BK)	Driver safety belt retractor pretensioner, return
23	–	not used
24	–	not used
25	–	not used
26	1083 (LB/BK)	Air bag, tone driver