C809 (WH)

14401

A30
Instrument cluster

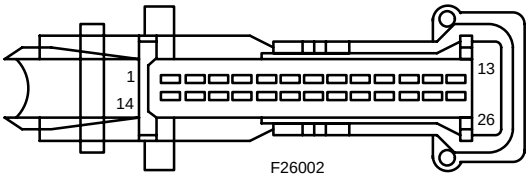

F26002

Pin	Circuit	Circuit Function
1	31S-GE49 (BK/BU)	Ground, switched
	31S-CF45A (BK/GN)	Ground, switched
2	91-GG14 (BK/OG)	Ground
3	29S-GG14 (OG)	Voltage supplied at all times (overload protected), switched
4	8-PG11 (WH/BK)	Sensor signal
	8-PG11B (WH/BK)	Sensor signal
5	15S-AA17 (GN/WH)	Voltage, ignition switch in Start or Run (not overload protected), switched
6	31S-CF28 (BK/RD)	Ground, switched
7	31S-CF45 (BK/GN)	Ground, switched
8	8-GA7 (WH/RD)	Sensor signal
9	–	not used
10	75-GG14 (YE/BU)	Voltage: Ignition switch in Accessory or Run
11	–	not used
12	7-GE6 (YE)	Voltage D.C. supplied at all times (sensor)
13	4-EG8 (GY/VT)	Data link, bus positive
14	30-GG14 (RD)	Voltage supplied at all times (not overload protected)
	29-GG14 (OG)	Voltage supplied at all times (overload protected)

Pin	Circuit	Circuit Function
15	9-GA7 (BN/RD)	Sensor signal return (reference/ground)
16	15-GG14 (GN/RD)	Voltage, ignition switch in Start or Run (not overload protected)
17	49S-LG22 (BU/YE)	Pulsed power feed (overload protected), switched
18	31S-GE49 (BK/BU)	Ground, switched
	31S-CF45A (BK/GN)	Ground, switched
19	31S-GC20 (BK/OG)	Ground, switched
20	31S-GC6 (BK/YE)	Ground, switched
21	15S-LE11 (GN/WH)	Voltage, ignition switch in Start or Run (not overload protected), switched
22	91S-JA14 (BK/GN)	Ground, switched
23	49S-LG15 (BU/BK)	Pulsed power feed (overload protected), switched
24	31S-AA7 (BK/BU)	Ground, switched
25	31S-AA43 (BK/WH)	Ground, switched
26	5-EG8 (BU/WH)	Data link, bus negative