REVISED

PREMIUM



C231

FRONT CONTROL UNIT

PIN	CIRCUIT	CIRCUIT FUNCTION
1	–	NOT USED
2	–	NOT USED
3	–	NOT USED
4	–	NOT USED
5	1068 (LG/BK)	Audio System ON
6	832 (LB/PK)	Audio Communication Network
7	833 (TN)	Audio Communication Network
8	–	NOT USED
9	–	NOT USED
10	–	NOT USED
11	–	NOT USED
12	–	NOT USED
13	–	NOT USED
14	595 (LB/RD)	Redundant Audio Controls
15	–	NOT USED
16	48	Audio Shield
17	690 (GY)	CD-Right Channel Signal IN
18	799 (OG/BK)	CD-Right Channel Signal OUT
19	856 (VT)	CD-Left Channel Signal IN
20	798 (LG/RD)	CD-Left Channel Signal OUT

REVISED

BASE/PREMIUM

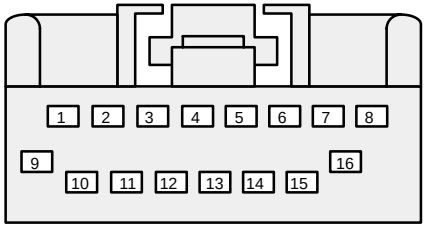

C232

FRONT CONTROL UNIT

PIN	CIRCUIT	CIRCUIT FUNCTION
1	19 (LB/RD)	Backlite Input
2	57 (BK)	Ground
3	33 (WH/PK)	Power (Hot in Start)
4	651 (BK/YE)	Disable Radio Clock Input
5	802 (OG/RD)	RR Speaker Signal (+)
6	803 (BN/PK)	RR Speaker Signal (–)
7	805 (WH/LG)	RF Speaker Signal (+)
8	811 (DG/OG)	RF Speaker Signal (–)
9	828 (VT/LB)	Power (Hot at All Times)
10	137 (YE/BK)	Power (Hot in Acc Or Run)
11	694 (BK/LG)	Ground
12	800 (GY/LB)	LR Speaker Signal (+)
13	801 (TN/YE)	LR Speaker Signal (–)
14	804 (OG/LG)	LF Speaker Signal (+)
15	813 (LB/WH)	LF Speaker Signal (–)
16	694 (BK/LG)	Ground