C2183

14401

N418
Transmission shift selector

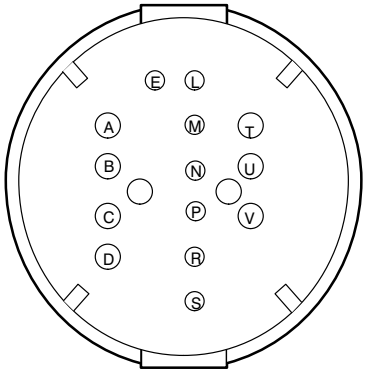

F15023

Pin	Circuit	Circuit function
A	170 (RD/LB)	Shift solenoid A
B	171 (BK/WH)	Voltage supplied at all times (overload protected)
C	172 (LB/RD)	Shift solenoid B
D	173 (DG/VT)	Shift solenoid D
E	174 (GY/BK)	Shift solenoid C
L	176 (PK/LG)	Powertrain Control Module (PCM) (12A650), to, Generic Electronic Module (GEM) (14B205)
M	175 (BK/YE)	Powertrain Control Module (PCM) (12A650), to, Generic Electronic Module (GEM) (14B205)
N	124 (BN)	Powertrain Control Module (PCM) (12A650), to, Generic Electronic Module (GEM) (14B205)
P	143 (LB/YE)	Powertrain Control Module (PCM) (12A650), to, Generic Electronic Module (GEM) (14B205)
R	136 (DB/YE)	Powertrain Control Module (PCM) (12A650), to, Generic Electronic Module (GEM) (14B205)
S	180 (RD)	Powertrain Control Module (PCM) (12A650), to, Generic Electronic Module (GEM) (14B205)
T	186 (BK/LB)	Ground
U	187 (DB/OG)	Illumination, Power
V	188 (WH/BK)	Ground

C2218

14401

K306
Power window relay



F05129

Pin	Circuit	Circuit function
30	193 (YE/LG)	Window safety relay, switched output
85	296 (WH/VT)	Fused accessory relay, switched power, output
86	57 (BK)	Ground
87	170 (RD/LB)	Window lockout, switched power, output
87A	–	not used

C2219

14401

B8
Throttle Position Sensor (TPS) (9B989)



F03295

Pin	Circuit	Circuit function
1	359 (GY/RD)	Reference, voltage
2	216 (TN/RD)	Throttle Position Sensor (TPS) (9B989), input
3	21 (DG/LG)	Powertrain Control Module (PCM) (12A650), to, Generic Electronic Module (GEM) (14B205)