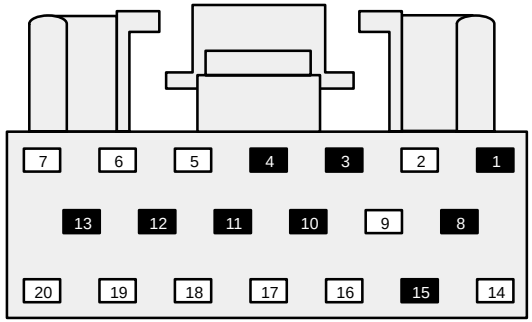

C228

RADIO

PIN	CIRCUIT	CIRCUIT FUNCTION
1	–	NOT USED
2	747 (OG/LB)	Power Antenna Logic
3	–	NOT USED
4	–	NOT USED
5	1068 (LB/BK)	ASYS On
6	832 (LB/PK)	Audio Corporate Protocol A
7	833 (TN)	Audio Corporate Protocol B
8	–	NOT USED
9	679 (GY/BK)	Vehicle Speed Signal (+)
10	–	NOT USED
11	–	NOT USED
12	–	NOT USED
13	–	NOT USED
14	595 (LB/RD)	Radio Receiver to Redundant Radio Control
15	–	NOT USED
16	57 (BK)	Shield
17	690 (GY)	CD–Right Channel Signal +
18	799 (OG/BK)	CD–Right Channel Signal –
19	856 (VT)	CD–Left Channel Signal +
20	798 (LG/RD)	CD–Left Channel Signal –

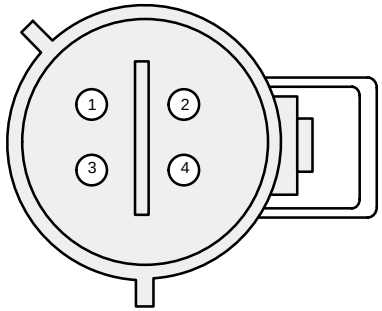

C362

POWER ANTENNA MODULE

PIN	CIRCUIT	CIRCUIT FUNCTION
1	57 (BK)	Ground
2	451 (LB/YE)	Power (Hot at All Times)
3	1000 (RD/BK)	Power (Hot at All Times)
4	747 (OG/LB)	Power Antenna Logic