C206 (GY)

XLT

14401

Instrument panel dimming module



F09017

Pin	Circuit	Circuit function
1	705 (LG/OG)	Battery saver relay, switched power
	705 (LG/OG)	
2	402 (OG/LG)	Interior lamp relay, feed
3	53 (BK/LB)	Interior lamp relay, switched power, output
	53 (BK/LB)	
4	55 (BK/PK)	Instrument panel dimming module, output
5	–	not used
6	14 (BN)	Power, Exterior lamps
7	19 (LB/RD)	Radio (18806) Illumination, input
8	235 (RD/BK)	Instrument illumination +
9	570 (BK/WH)	Ground

XLS



F04267

Pin	Circuit	Circuit function
1	19 (LB/RD)	Radio (18806) Illumination, input
2	53 (BK/LB)	Interior lamp relay, switched power, output
3	1045 (DB/WH)	Instrument illumination +
4	705 (LG/OG)	Battery saver relay, switched power

C210 (BK)

18B864

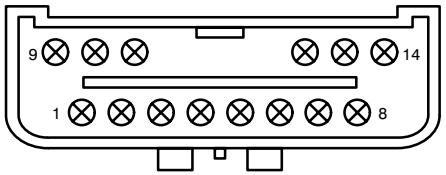

F14008

(1) 694 (BK/LG)
(2) 167 (BN/OG)
(3) 168 (RD/BK)
(4) –
(5) –
(6) –
(7) –
(8) –
(9) 828 (VT/LB)
(10) 57 (BK)
(11) 173 (DG/VT)
(12) –
(13) –
(14) –

14401

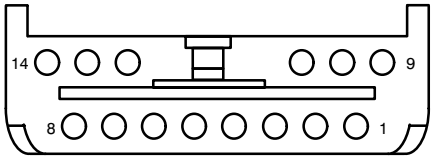

F14002

(1) 694 (BK/LG)
(2) 167 (BN/OG)
(3) 168 (RD/BK)
(4) –
(5) –
(6) –
(7) –
(8) –
(9) 828 (VT/LB)
(10) 57 (BK)
(11) 173 (DG/VT)
(12) –
(13) –
(14) –