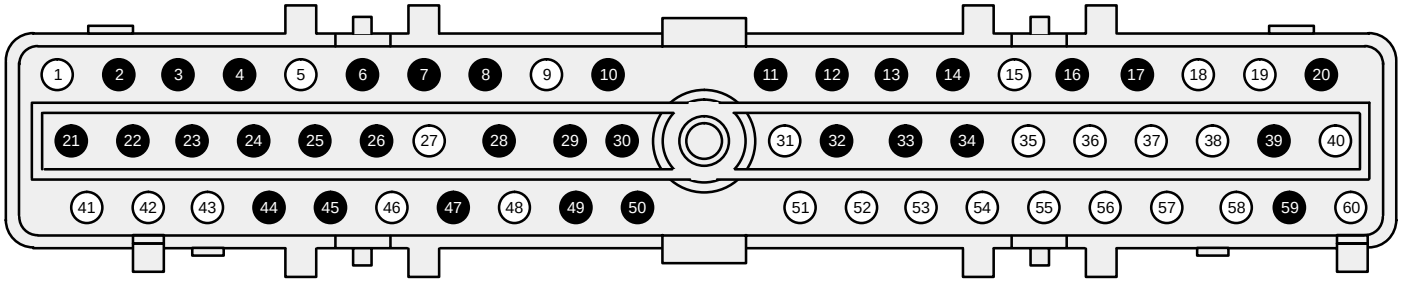

C408
VEHICLE DYNAMIC MODULE (VDM)

PIN	CIRCUIT	CIRCUIT FUNCTION	PIN	CIRCUIT	CIRCUIT FUNCTION
1	1050 (LG/VT)	Power (Hot in Run)	21	–	NOT USED
2	–	NOT USED	22	–	NOT USED
3	–	NOT USED	23	–	NOT USED
4	–	NOT USED	24	–	NOT USED
5	427 (PK/BK)	Height Sensor Input-Left Rear	25	–	NOT USED
6	–	NOT USED	26	–	NOT USED
7	–	NOT USED	27	422 (PK/BK)	Height Sensor Input-Left Front
8	–	NOT USED	28	–	NOT USED
9	424 (TN)	Height Sensor Input-Right Front	29	–	NOT USED
10	–	NOT USED	30	–	NOT USED
11	–	NOT USED	31	114 (LB/YE)	VAPS Control Assy-INPUT
12	–	NOT USED	32	–	NOT USED
13	–	NOT USED	33	–	NOT USED
14	–	NOT USED	34	–	NOT USED
15	426 (RD/BK)	Height Sensor Power Feed	35	420 (DB/YE)	Air Compressor Power Relay Control
16	–	NOT USED	36	418 (DG/YE)	Power (Hot at All Times)
17	–	NOT USED	37	418 (DG/YE)	Power (Hot at All Times)
18	915 (PK/LB)	Data – (SCP Communication Network)	38	416 (LB/BK)	Air Solenoid Control-Right Rear
19	914 (TN/OG)	Data + (SCP Communication Network)	39	–	NOT USED
20	–	NOT USED	40	875 (BK/LB)	Ground

40-7 AIR SUSPENSION (VAPS)

PIN	CIRCUIT	CIRCUIT FUNCTION	PIN	CIRCUIT	CIRCUIT FUNCTION
41	429 (VT/LG)	Air Solenoid Control-Left Rear	51	840 (WH/BK)	Actuator Control LF
42	421 (PK)	Air Compressor Vent Solenoid	52	843 (WH)	Actuator Control RR
43	428 (OG/BK)	Height Sensor Input-Right Rear	53	841 (WH/RD)	Actuator Control RF
44	–	NOT USED	54	842 (WH/OG)	Actuator Control LR
45	–	NOT USED	55	115 (LG/BK)	VAPS Control Assy Output
46	432 (BK/PK)	Height Sensor Signal Return	56	418 (DG/YE)	Power (Hot at All Times)
47	–	NOT USED	57	418 (DG/YE)	Power (Hot at All Times)
48	425 (BN/PK)	Air Suspension Inhibit Switch Input	58	418 (DG/YE)	Power (Hot at All Times)
49	–	NOT USED	59	–	NOT USED
50	–	NOT USED	60	875 (BK/LB)	Ground