C210

IP Harness

Multi-function switch



3577246C1

Pin	Circuit	Circuit Function
A	15 (RD/YE)	Headlamp dimmer switch feed
B	1033 (RD/YE)	Headlamp switch to module
C	632 (GY/OG)	Dimmer switch to high beam headlamp fuse
D	196 (DB/OG)	Headlamp flash to pass switch feed
E	680 (LB/OG)	Front wiper switch delay/wash to module, GEM-input
F	682 (DB)	Front wiper switch to module, GEM-input
G	684 (PK/YE)	Front wiper switch mode select to module, GEM-input

C213

IP Harness

Instrument cluster

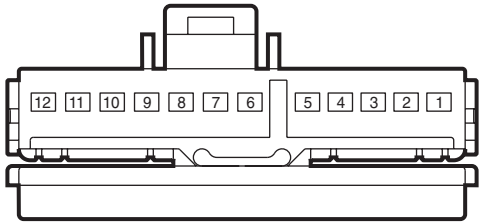

3577213C1

Pin	Circuit	Circuit Function
1	2228 (LB/OG)	Rear axle diff lock lamp
2	464 (BK/PK)	Module to lamp
3	643 (RD)	Diesel water in fuel sender to warning lamp
4	42 (RD/WH)	Switch to warning lamp
5	450 (DG/LG)	Seat belt warning indicator lamp feed
6	115 (LG/BK)	MD Trans, VAPS control assembly - diagnostic output
6	125 (DB/WH)	LCT Trans, PCM - modulated converter clutch - low impedance
7	658 (PK/LG)	Module, powertrain control to check engine lamp
8	—	Not used
9	123 (RD)	Range inhibit lamp
10	12 (LG/BK)	Headlamp dimmer switch to high beams
11	603 (DG)	Failure warning light
12	57 (BK)	Ground circuit