PICKUP

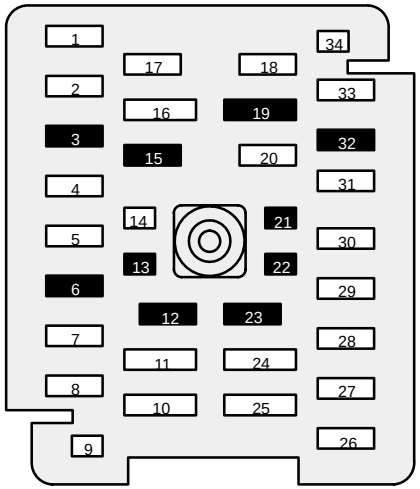

C242a

CENTRAL JUNCTION BOX

PIN	CIRCUIT	CIRCUIT FUNCTION	PIN	CIRCUIT	CIRCUIT FUNCTION
1	10 (LG/RD)	Brake Pressure Switch	18	54 (LG/YE)	Fused Power Supply Feed
2	10 (LG/RD)	Brake Pedal Position (BPP) Switch	19	–	NOT USED
3	–	NOT USED	20	53 (BK/LB)	Running Board Lamp Feed
4	973 (RD)	Fuel Tank Selector Switch	21	–	NOT USED
5	12 (LG/BK)	Headlamp Dimmer Switch to HIGH Beams	22	–	NOT USED
6	–	NOT USED	23	–	NOT USED
7	1000 (RD/BK)	Fused Ignition START to Radio	24	996 (OG/WH)	Left Window Switch Current Sense (LOW) to GEM
8	1002 (BK/PK)	Fused Ignition RUN/ACC to GEM			
9	402 (OG/LG)	Interior Lamp Switch to GEM	25	170 (RD/LB)	Fused Power Feed to Central Junction Box
10	400 (LB/BK)	Power Feed to Left and Right Window Switch	26	66 (LB)	Fused Window Lock Switch Illumination
11	460 (YE/LB)	Horn Relay	27	383 (RD/WH)	Electronic Flasher Feed
12	–	NOT USED	28	40 (LB/WH)	Fused Power Supply Feed
13	–	NOT USED	29	460 (YE/LB)	Fused Power Supply Feed
14	298 (VT/OG)	Blower Motor Relay Coil Feed	30	632 (GY/OG)	Dimmer Switch to HIGH Beams
15	–	NOT USED	31	1 (DB)	Horn Switch
16	297 (BK/LG)	Fused Ignition RUN/ACC Feed	32	–	NOT USED
17	400 (LB/BK)	Window Lock Illumination	33	53 (BK/LB)	Overhead Interior Lamp Feed
			34	298 (VT/OG)	Fused Ignition RUN Feed