C162

14290

E42
Fog lamp, right front
(15200)



F02038

Pin	Circuit	Circuit function
1	57 (BK)	Ground
2	478 (TN/OG)	Fog lamp relay, to front fog lamp

C167

14290

B234
Digital Transmission
Range (DTR) sen-
sor (7F293)

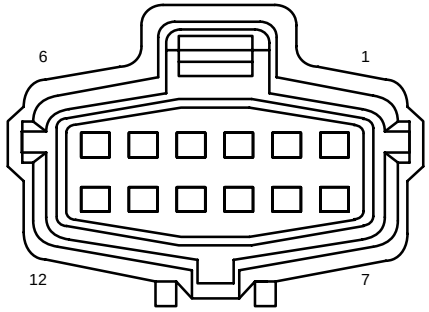

F12040

Pin	Circuit	Circuit function
1	–	not used
2	359 (GY/RD)	signal, return
3	1268 (RD/BK)	Digital Transmission Range (DTR) sensor, TR3A
4	1144 (YE/BK)	Digital Transmission Range (DTR) sensor TR1
5	1145 (LB/BK)	Digital Transmission Range (DTR) sensor TR2
6	1143 (WH/BK)	Digital Transmission Range (DTR) sensor TR4
7	–	not used
8	–	not used
9	1039 (BK/YE)	Voltage in Run (overload protected)
10	262 (BN/PK)	Voltage supplied in Start (overload protected)
11	140 (BK/PK)	Voltage supplied in reverse
12	1093 (TN/RD)	Power, Hot in Start with Park or Neutral

C171 (GN)

12B637

B48
Heated Oxygen
Sensor (HO2S) #11
(9G444)



F04124

Pin	Circuit	Circuit function
1	361 (RD)	Voltage supplied in Start and Run (overload protected)
2	387 (RD/WH)	Heated Oxygen Sensor (HO2S) #11 (9G444), heater
3	359 (GY/RD)	signal, return
4	74 (GY/LB)	Heated Oxygen Sensor (HO2S) #11 (9G444), input

C172 (GN)

12B637

B47
Heated Oxygen
Sensor (HO2S) #21
(9G444)



F04124

Pin	Circuit	Circuit function
1	361 (RD)	Voltage supplied in Start and Run (overload protected)
2	389 (WH/BK)	Heated Oxygen Sensor (HO2S) #21 (9G444), heater
3	359 (GY/RD)	signal, return
4	392 (RD/LG)	Heated Oxygen Sensor (HO2S) #21 (9G444), input

C174

12B637

F01031

U10
Ignition transformer
capacitor 1 (18801)

Pin	Circuit	Circuit function
1	361 (RD)	Voltage supplied in Start and Run (overload protected)