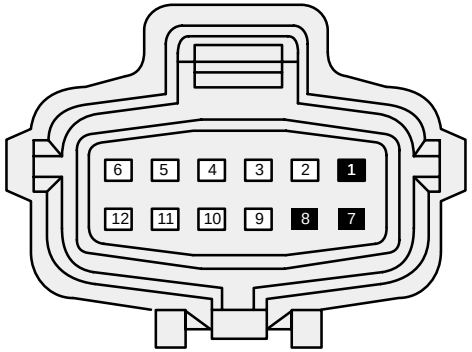

C168
DIGITAL TRANSMISSION RANGE (DTR) SENSOR

PIN	CIRCUIT	CIRCUIT FUNCTION
1	–	NOT USED
2	359 (GY/RD)	Signal Return
3	199 (LB/YE)	Digital Transmission Range (DTR) Sensor TR3A
4	1144 (YE/BK)	Digital Transmission Range (DTR) Sensor TR1
5	1145 (LB/BK)	Digital Transmission Range (DTR) Sensor TR2
6	1143 (WH/BK)	Digital Transmission Range (DTR) Sensor TR4
7	–	NOT USED
8	–	NOT USED
9	295 (LB/BK)	Power (Hot in Run)
10	33 (WH/PK)	Start Circuit
11	140 (BK/PK)	Reversing Lamps Feed
12	262 (BN/PK)	Start Circuit



C119 (WHITE)
4R70W TRANSMISSION

PIN	CIRCUIT	CIRCUIT FUNCTION
1	–	NOT USED
2	359 (GY/RD)	Signal Return
3	126 (VT/YE)	Torque Converter Clutch (TCC) Solenoid
4	391 (RD/YE)	Vehicle Power
5	923 (OG/BK)	Transmission Fluid Temperature (TFT) Sensor
6	925 (WH/YE)	Electronic Pressure Control (EPC) Solenoid
7	237 (OG/YE)	Shift Solenoid A
8	315 (VT/OG)	Shift Solenoid B
9	–	NOT USED
10	–	NOT USED