62-7 INSTRUMENT CLUSTER (ANALOG)

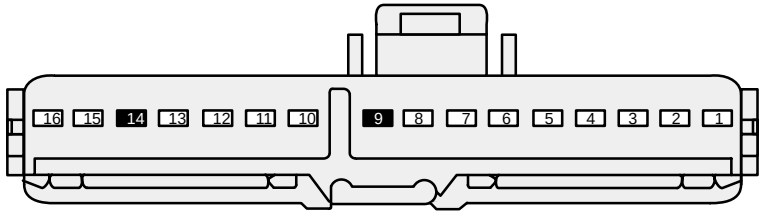

C286 (WHITE)

INSTRUMENT CLUSTER

PIN	CIRCUIT	CIRCUIT FUNCTION
1	911 (WH/LG)	Transmission Control Indicator Lamp (TCIL) Ground Input
2	784 (LB/BK)	4x4 Low Range Indicator Ground Input
3	783 (GY)	4x4 High Range Indicator Ground Input
4	203 (OG/LB)	Speed Control Indicator Ground Input
5	484 (OG/BK)	Headlamp Switch Power Input
6	343 (DB/LG)	Alarm Indicator Input
7	57 (BK)	Ground
8	235 (RD/BK)	Cluster Illumination
9	–	NOT USED
10	2 (WH/LB)	Right Turn Indicator Input
11	627 (BK/OG)	Door Ajar Input
12	253 (DG/WH)	Engine Oil Pressure Switch Input
13	640 (RD/YE)	Ignition (Hot in Start or Run)
14	–	NOT USED
15	11 (TN/YE)	Tachometer Output
16	397 (BK/WH)	Ground (5.0L)

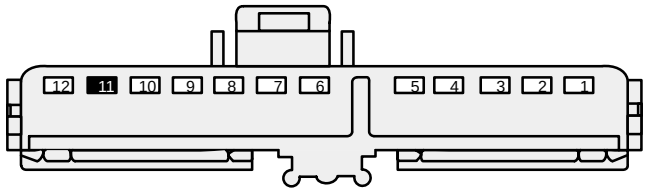

C287 (BLACK)

INSTRUMENT CLUSTER

PIN	CIRCUIT	CIRCUIT FUNCTION
1	679 (GY/BK)	4WABS Signal Input
2	570 (BK/WH)	Ground
3	39 (RD/WH)	Engine Coolant Temperature Input
4	235 (RD/BK)	Cluster Illumination
5	3 (LG/WH)	Left Turn Indicator Input
6	12 (LG/BK)	High Beam Indicator Input
7	57 (BK)	Ground
8	640 (RD/YE)	Ignition (Hot in Start or Run)
9	658 (PK/LG)	Malfunction Indicator Lamp (MIL) Ground Input
10	1017 (BK/WH)	Fuel Cap Indicator–Ground Input
11	–	NOT USED
12	29 (YE/WH)	Fuel Level Input