C270d (BU/WH)

14401

Central Junction Box (CJB) (14A068)



F15010

Pin	Circuit	Circuit function
1	32 (RD/LB)	Voltage supplied at all times (overload protected)
2	218 (WH/VT)	Park lamp relay, control
3	383 (RD/WH)	Voltage supplied at all times (overload protected)
4	601 (LB/PK)	Voltage supplied in Start and Run (overload protected)
	601 (LB/PK)	
5	162 (LG/RD)	Brake indicator, control
6	3 (LG/WH)	Turn lamps, feed, left front
7	1050 (LG/VT)	Voltage supplied in Start and Run (overload protected)
8	1359 (DG/VT)	Rear wiper relay, control
9	6 (YE/LG)	Horn relay, control
	6 (YE/LG)	
10	–	not used
11	919 (GY/BK)	Park lamp relay, switched output
	919 (GY/BK)	
12	140 (BK/PK)	Reverse signal
13	2 (WH/LB)	Turn lamps, feed, right front
14	956 (OG/LG)	Voltage supplied at all times (overload protected)
15	306 (TN/LB)	Voltage supplied in Start (overload protected)
	306 (TN/LB)	

C270e (BK)

14405

Central Junction Box (CJB) (14A068)

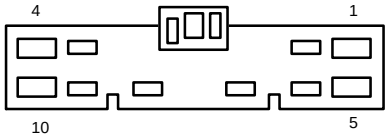

F10109

Pin	Circuit	Circuit function
1	400 (LB/BK)	Accessory delay relay, switched output
2	720 (RD/YE)	Voltage supplied at all times (overload protected)
3	–	not used
4	170 (RD/LB)	Accessory delay relay, switched power, switched output
5	57 (BK)	Ground
6	1004 (LB/RD)	Accessory delay relay, control
7	962 (BN/WH)	Park lamp relay, switched output
8	–	not used
9	10 (LG/RD)	Voltage supplied at all times (overload protected)
10	171 (BK/WH)	Voltage supplied at all times (overload protected)