C175

12A581

A147
Powertrain Control
Module (PCM)
(12A650)

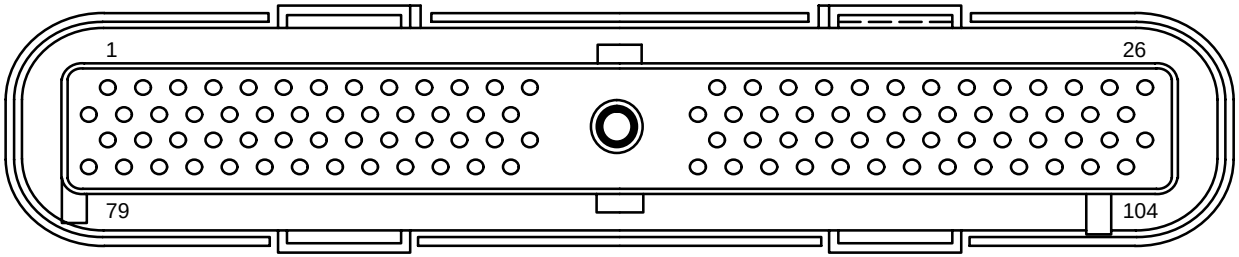

F104001

Pin	Circuit	Circuit Function
1	1025 (OG/YE)	Coil On Plug (COP) 6 (12029), control
2	–	not used
3	570 (BK/WH)	Ground
4	–	not used
5	–	not used
6	237 (OG/YE)	Shift solenoid A
7	–	not used
8	–	not used
9	29 (YE/WH)	Fuel pump/fuel gauge sender
10	–	not used
11	315 (VT/OG)	Shift solenoid B
12	–	not used
13	107 (VT)	Module programming signal
14	–	not used
15	915 (PK/LB)	SCP Bus –
16	914 (TN/OG)	SCP Bus +
17	–	not used
18	–	not used
19	–	not used
20	971 (PK/BK)	Shift solenoid C
21	138 (BK/PK)	Crankshaft position sensor (6C315) +
22	139 (GY/YE)	Crankshaft position sensor (6C315) –
23	1274 (DG/WH)	Knock sensor (12A699) 2 –

Pin	Circuit	Circuit Function
24	–	not used
25	57 (BK)	Ground
26	1024 (LG/WH)	Coil On Plug (COP) 1 (12029), control
27	1021 (LG/YE)	Coil On Plug (COP) 5 (12029), control
28	228 (DB)	Low speed fan control relay, control
29	–	not used
30	–	not used
31	330 (YE/LG)	Power steering pressure switch, input
32	311 (DG/VT)	Knock sensor (12A699) 1 –
33	–	not used
34	1012 (OG/BK)	Digital Transmission Range (DTR) sensor (7F293), TR1
35	392 (RD/LG)	Heated Oxygen Sensor (HO2S) #12 (9F472), input
36	968 (TN/LB)	Mass Air Flow (MAF) sensor (12B579), signal, return
37	923 (OG/BK)	Transmission Fluid Temperature (TFT) sensor, input
38	354 (LG/RD)	Engine Coolant Temperature (ECT) sensor (12A648), input
39	743 (GY)	Intake Air Temperature (IAT) sensor (12A697), input
40	238 (DG/YE)	Fuel pump, monitor
41	348 (VT)	A/C demand signal
42	–	not used
43	–	not used
44	–	not used
45	–	not used
46	639 (LG/VT)	High speed cooling fan relay, control

Pin	Circuit	Circuit Function
47	360 (BN/PK)	EGR Vacuum Regulator (EVR), control
48	–	not used
49	972 (BK/WH)	Digital Transmission Range (DTR) sensor (7F293), TR2
50	944 (DG/OG)	Digital Transmission Range (DTR) sensor (7F293), TR4
51	570 (BK/WH)	Ground
52	1028 (WH/PK)	Coil On Plug (COP) 3 (12029), control
53	1030 (DG/VT)	Coil On Plug (COP) 4 (12029), control
54	125 (DB/WH)	Torque Converter Clutch (TCC) solenoid
55	1047 (LG/RD)	keep alive memory
56	191 (LG/BK)	EVAP canister purge valve
57	310 (YE/RD)	Knock sensor (12A699) 1 +
58	–	not used
59	970 (DG/WH)	Turbine shaft speed sensor (7M101)
60	74 (GY/LB)	Heated Oxygen Sensor (HO2S) #11 (9G444), input
61	393 (VT/LG)	Heated Oxygen Sensor (HO2S) #22 (9F472), input
62	791 (RD/PK)	Fuel tank pressure transducer sensor (9C968)
63	141 (RD/PK)	Fuel rail pressure transducer sensor
64	199 (LB/YE)	Digital Transmission Range (DTR) sensor, TR3A
65	352 (BN/LG)	Differential Pressure Feedback EGR (DPFE) sensor, input
66	–	not used
67	91 (VT/WH)	Evaporative emission (EVAP) canister vent valve (9F945)
68	–	not used
69	331 (PK/YE)	A/C clutch relay, control
70	–	not used
71	361 (RD)	Voltage supplied in Start and Run (overload protected)
72	561 (TN/RD)	Injector 7, control
73	559 (TN/BK)	Injector 5, control
74	557 (BN/YE)	Injector 3, control

Pin	Circuit	Circuit Function
75	555 (TN)	Injector 1, control
76	–	not used
77	570 (BK/WH)	Ground
78	1027 (PK/LB)	Coil On Plug (COP) 7 (12029), control
79	1029 (WH/RD)	Coil On Plug (COP) 8 (12029), control
80	926 (LB/OG)	Fuel pump driver module (9H307)
81	925 (WH/YE)	Electronic Pressure Control (EPC) solenoid
82	–	not used
83	264 (WH/LB)	Idle air control valve (IAC) (9F715), control
84	–	not used
85	282 (DB/OG)	Camshaft position sensor (6B288), input
86	440 (TN/LG)	A/C pressure transducer sensor
87	94 (RD/BK)	Heated Oxygen Sensor (HO2S) #21 (9G444), input
88	967 (LB/RD)	Mass Air Flow (MAF) sensor (12B579), input
89	355 (GY/WH)	Throttle Position Sensor (TPS) (9B989), input
90	351 (BN/WH)	Reference, voltage
91	359 (GY/RD)	signal, return
92	–	not used
93	387 (RD/WH)	Heated Oxygen Sensor (HO2S) #11 (9G444), heater
94	388 (YE/LB)	Heated Oxygen Sensor (HO2S) #21 (9G444), heater
95	389 (WH/BK)	Heated Oxygen Sensor (HO2S) #12 (9F472), heater
96	390 (TN/YE)	Heated Oxygen Sensor (HO2S) #22 (9F472), heater
97	–	not used
98	562 (LB)	Injector 8, control
99	560 (LG/OG)	Injector 6, control
100	558 (BN/LB)	Injector 4, control
101	556 (WH)	Injector 2, control
102	1273 (YE)	Knock sensor (12A699) 2 +
103	570 (BK/WH)	Ground
104	1026 (PK/WH)	Coil On Plug (COP) 2 (12029), control