C220b (BK)

14401

Instrument cluster

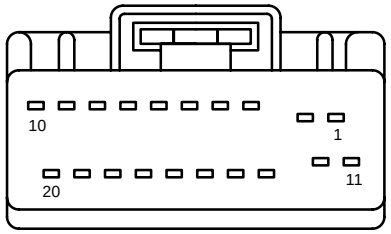

F20045

Pin	Circuit	Circuit function
1	1205 (BK)	Ground
2	12 (LG/BK)	Power, Hot with High Beams on
3	2 (WH/LB)	Turn lamps, feed, right front
4	19 (LB/RD)	Instrument illumination, feed
5	–	not used
6	–	not used
7	–	not used
8	960 (BK/LB)	Traction control switch, indicator, control
9	959 (GY)	Traction control switch, signal
10	729 (RD/WH)	Voltage supplied at all times (overload protected)
11	489 (PK/BK)	Voltage, hot in run only
12	20 (WH/LB)	Voltage supplied in Start and Run (overload protected)
13	–	not used
14	128 (VT/YE)	Brake indicator, control
15	603 (DG)	Anti–lock brake indicator, control
16	31 (WH/RD)	engine Oil pressure switch (9278) signal
17	–	not used
18	–	not used
19	29 (YE/WH)	Fuel pump/fuel gauge sender
20	397 (BK/WH)	Ground

C237 (BK)

14631

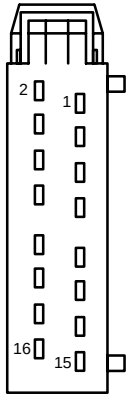

F16046

14A005

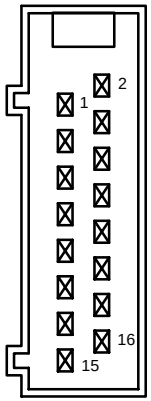

F16044

(1) 287 (BK/WH)
(2) 822 (BK/LG)
(3) 543 (DG)
(4) 544 (VT)
(5) 542 (YE)
(6) 765 (YE/BK)
(7) 804 (OG/LG)
(8) –
(9) 813 (LB/WH)
(10) –
(11) 326 (WH/VT)
(12) 129 (LG)
(13) 1014 (VT)
(14) 1015 (RD/WH)
(15) 992 (WH/BK)
(16) 163 (RD/OG)

C238 (BN)

14401



F063535

18C629



F06353

(1) 249 (DB/LG)
(2) 1205 (BK)
(3) 752 (YE/RD)
(4) 261 (OG/BK)
(5) 754 (LG/WH)
(6) 261 (OG/BK)