C388 Late Production

14B079

Rear Control Unit (RCU)

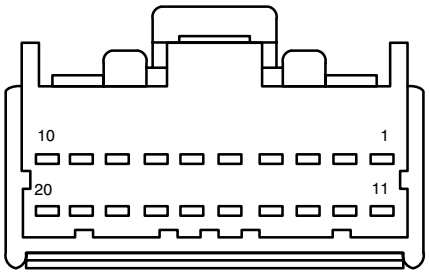

F20060

Pin	Circuit	Circuit function
1	1417 (LG/RD)	Light emitting diode (LED), Illumination
2	57 (BK)	Ground
3	694 (BK/LG)	Ground
4	802 (OG/RD)	Speaker, right rear (18808) +
5	803 (BN/PK)	Speaker, right rear (18808) –
6	800 (GY/LB)	Speaker, left rear (18808) +
7	801 (TN/YE)	Speaker, left rear (18808) –
8	48 (BK)	Shield
9	1595 (RD)	J2533
10	1594 (WH)	J2533 !!! No Data Found !!!, Left +
11	720 (RD/YE)	!!! No Data Found !!!, Left – Voltage supplied at all times (overload protected)
12	1068 (LG/BK)	Audio System ON (ASYSON)
13	–	not used
14	833 (TN)	Audio corporate protocol B
15	832 (LB/PK)	Audio corporate protocol A
16	–	not used
17	827 (TN/WH)	Speaker, left rear (18808) +
18	825 (TN/LG)	Speaker, right rear (18808) +
19	1597 (OG)	J2533
20	1596 (PK)	J2533 !!! No Data Found !!!, Right + !!! No Data Found !!!, Right –

C402a (BK)

14086

Rear window defrost grid (18C618)

F01029

Pin	Circuit	Circuit function
1	186 (BN/LB)	Rear window defrost relay, output

C402b (BK)

14086

Rear window defrost grid (18C618)

F01029

Pin	Circuit	Circuit function
1	57 (BK)	Ground