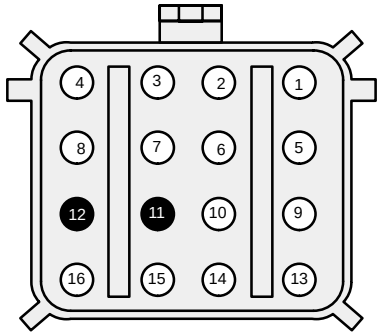

C1019 (BLACK)
TRANSFER CASE ASSEMBLY

PIN	CIRCUIT	CIRCUIT FUNCTION
1	770 (WH)	Contact Plate “B”
2	772 (LB)	Rear Speed Sensor Output
3	774 (LG)	Rear Speed Sensor Power
4	435 (YE/LB)	Front Speed Sensor Output
5	771 (VT/YE)	Contact Plate “A”
6	682 (DB)	Rear Speed Sensor Return
7	774 (LG)	Front Speed Sensor Power
8	682 (DB)	Front Speed Sensor Return
9	764 (BN/WH)	Contact Plate “C”
10	762 (YE/WH)	Contact Plate Ground Return
11	–	NOT USED
12	–	NOT USED
13	763 (OG/WH)	Contact Plate “D”
14	778 (OG)	Shift Relay to Motor H2L
15	777 (YE)	Shift Relay to Motor L2H
16	779 (BN)	Shift Relay to Electronic Clutch

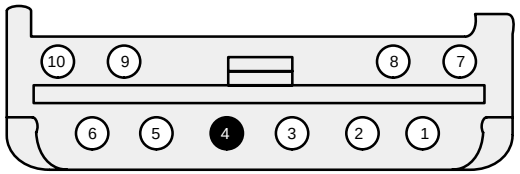

C221 (GRAY)
TRANSFER CASE SHIFT RELAYS

PIN	CIRCUIT	CIRCUIT FUNCTION
1	57 (BK)	Ground
2	900 (BK)	Ground
3	704 (DG/LG)	Power (Hot at All Times)
4	–	NOT USED
5	704 (DG/LG)	Power (Hot at All Times)
6	779 (BN)	Diode Protection For TOD Relay
7	777 (YE)	Shift Relay to Motor L2H
8	782 (BN/WH)	Relay Coil to GEM (L2H)
9	781 (OG/LB)	Relay Coil to GEM (H2L)
10	778 (OG)	Shift Relay to Motor H2L