C228b

14401

Electronic Automatic Temperature Control (EATC) module (19980)

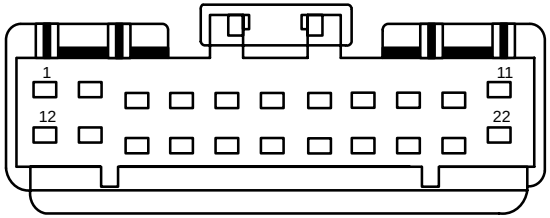

F22006

Pin	Circuit	Circuit function
1	915 (PK/LB)	SCP Bus –
2	–	not used
3	435 (YE/LB)	Fresh/recirculation door actuator (19E616)
4	437 (YE/LG)	Temperature blend door actuator, driver (19E616)
5	1122 (RD)	Temperature blend door actuator, passenger (19E616)
6	468 (BN)	Sunload sensor (19E663) +
7	1070 (BN/LB)	Audio/climate control switch
8	436 (RD/LG)	Air temperature door variable resistor +
9	364 (BK/LG)	Blower motor relay, control
10	–	not used
11	729 (RD/WH)	Voltage supplied at all times (overload protected)
12	914 (TN/OG)	SCP Bus +
13	–	not used
14	1130 (PK/LG)	Floor mode actuator (19E616)
15	1123 (YE/WH)	Panel/Defrost mode actuator
16	470 (PK/BK)	Sensor signal return (reference/ground)
17	767 (LB/OG)	Ambient air temperature sensor (19E702), feed
18	476 (BN/YE)	Sunload sensor (19E663) –
19	790 (WH/OG)	In–vehicle temperature sensor (19C734), input
20	688 (GY/LB)	Rear window defrost relay, control
21	–	not used
22	1040 (RD/BK)	Voltage in Run (overload protected)

C233 (GN)

14401

In–vehicle temperature sensor (19C734)



F02096

Pin	Circuit	Circuit function
1	790 (WH/OG)	In–vehicle temperature sensor (19C734), input
2	470 (PK/BK)	Sensor signal return (reference/ground)

C234

14401

Floor mode actuator (19E616)



F06128

Pin	Circuit	Circuit function
1	1375 (PK/YE)	Blend door actuator, signal
2	–	not used
3	1130 (PK/LG)	Air temperature door variable resistor, wiper
4	438 (RD/WH)	Air temperature door variable resistor –
5	436 (RD/LG)	Air temperature door variable resistor +
6	1376 (BK/LB)	Blend door actuator, control