

LED

INTEGRAL DRIVER


SMALL

PROJECT

TYPE

CATALOG NUMBER

Measurements in () are metric equivalents.

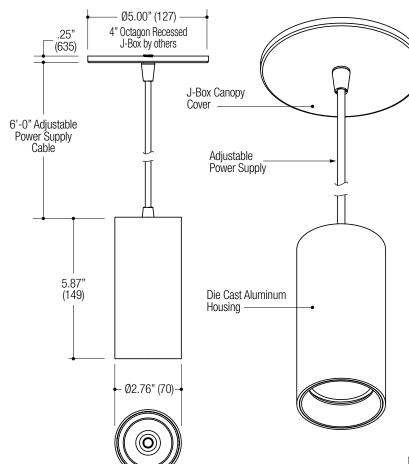



Specifications

PENDANT HOUSING

- Single downlight accent fixture / small size
- 2.76" Diameter cylindrical shape
- Die cast aluminum housing
- LED optical grade reflector
- 5" diameter canopy
- Powder coat finish

LED SOURCE

- CREE / ValuDIM™ Warm dimming
- Field replaceable optics available
- Will accept 1 lens and 1 louver
- Through ventilation passively cooled thermal management

ELECTRICAL

- Fully integral LED driver
- Phase dimmable power supply

MOUNTING

- Directly to junction box
- Surface canopy with 6' adjustable cable
- and hardware supplied

LABELS

Suitable for damp location









ORDERING INFO

ORDERING INFO					Limited
SERIES	WATTAGE	CRI / COLOR	BEAM	POWER SUPPLY	FINISH
JULRPB JULIE PENDANT Small Downlight	08C 8W LED 801 Im del. 13C 13W LED 1078 Im del. 15C 15W LED 1208 Im del. Delivered @ 80CRI / 3000K Narrow Beam	8027 80CRI / 2700K 8030 80CRI / 3000K 8035 80CRI / 3500K 8040 80CRI / 4000K 9227 92CRI / 2700K 9230 92CRI / 3000K 9240 92CRI / 4000K 9827 98CRI / 2700K 9830 98CRI / 3500K 9840 98CRI / 4000K	N Narrow 12° M Medium 25° W Wide 35° V Very Wide 55°	DMU Dimming Multiple Forward/Reverse Phase (@ 120V only) 0-10V Wires Present (@ 120-277V)	BB All Black WB White with Black Bezel WW All White SB Silver with Black Bezel Consult factory for
	ValuDIMTM 15V 15W LED / 712Im del. / 3000-1800K Warm Dimming Delivered @ 92CRI / 3000K Narrow Beam	9220 92CRI / 3000-1800K Warm Dimming (ValuDIM Only)			custom colors

Ordering Example: JULRPB-13C-8030-M-DMU-BB

We reserve the right to change or withdraw specifications without prior notice.

HEADQUARTERS 9200 Deering Avenue Chatsworth CA 91311 Telephone: 818-885-1335 Toll Free: 855-885-1335 Fax: 818-576-1335

www.lfillumination.com

rev:051022